

NOVABUK



COMPOSITION

55% POL
45% polyurethane fibre

**COLOUR FASTNESS
TO LIGHT**

Note 4-5
UNI EN ISO 105-B02

PILLING

Note 4-5
UNI EN ISO 12945-2

MARTINDALE

50.000 rubs
UNI EN ISO 12947-2






water repellent treatment

CARE




NOTES

Slight differences in colour may occur



COSME

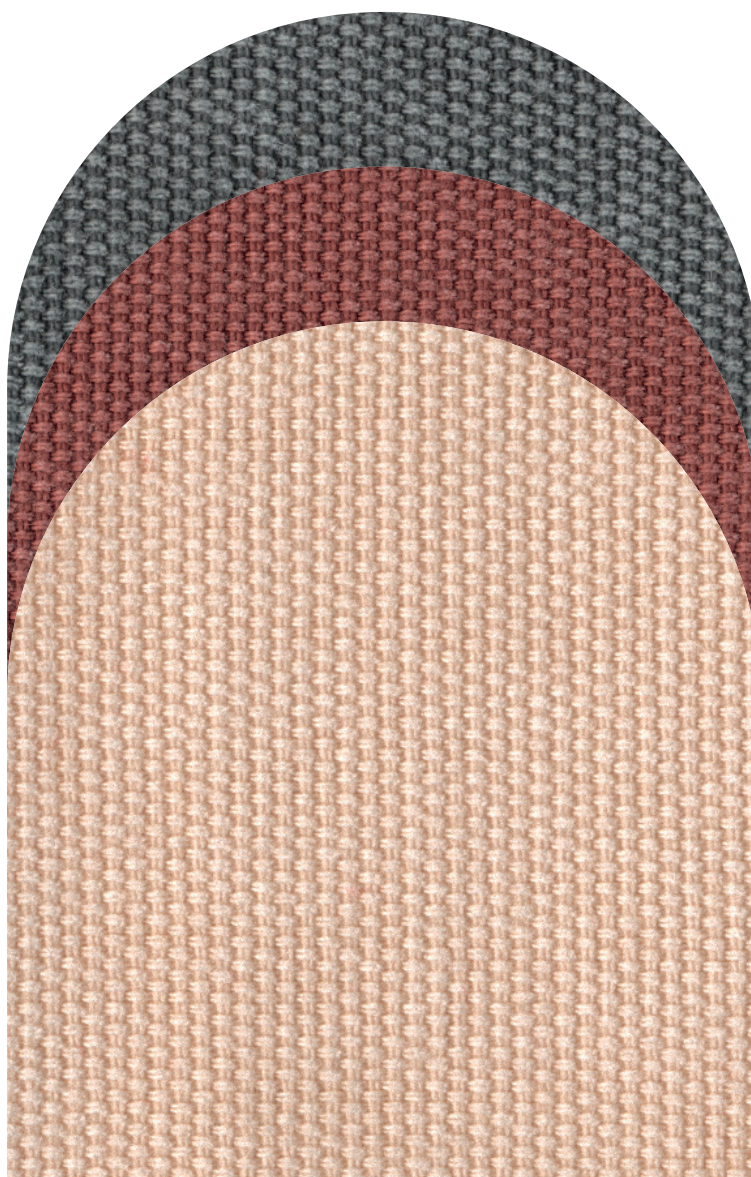

COMPOSITION

100% cotton

PILLING

Note 5

UNI EN ISO 12945-2

MARTINDALE

25.000 rubs


UNI EN ISO 12947-2

CARE



NOTES


Slight differences in colour may occur

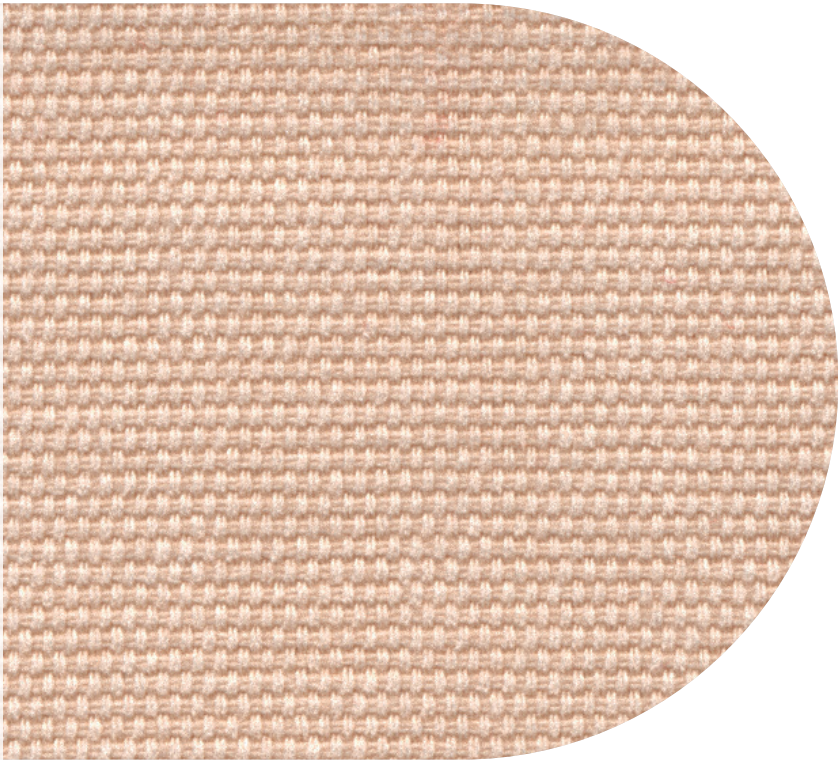

E200




E202



E205



E227



E220



E221




E217



E228



E229




E240



E243



E245



E237



E232




E235




E210

VELVET

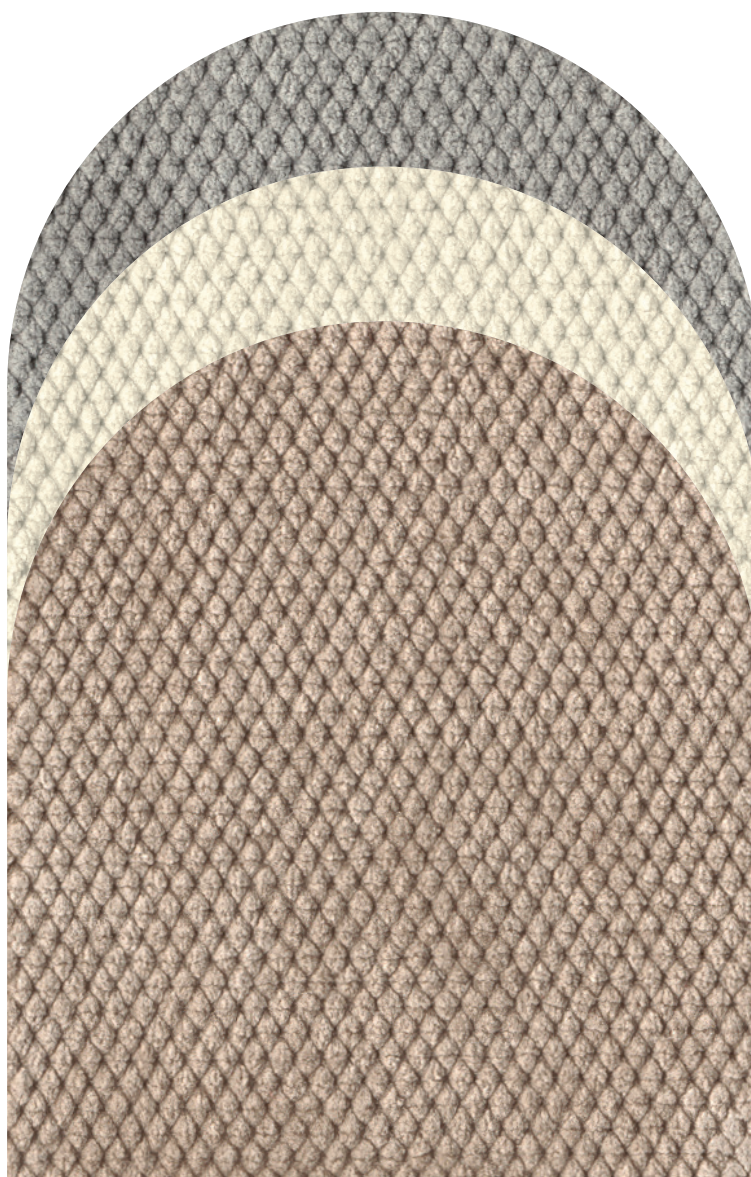

<p>COMPOSITION 100% polyester</p> <hr/> <p>PILLING Note 5 UNI EN ISO 12945-2</p> <hr/> <p>MARTINDALE 45.000 rubs UNI EN ISO 12947-2</p> <hr/> <p>anti stain treatment</p>	
<p>CARE</p> <p></p> <hr/> <p>NOTES Slight differences in colour may occur</p>	

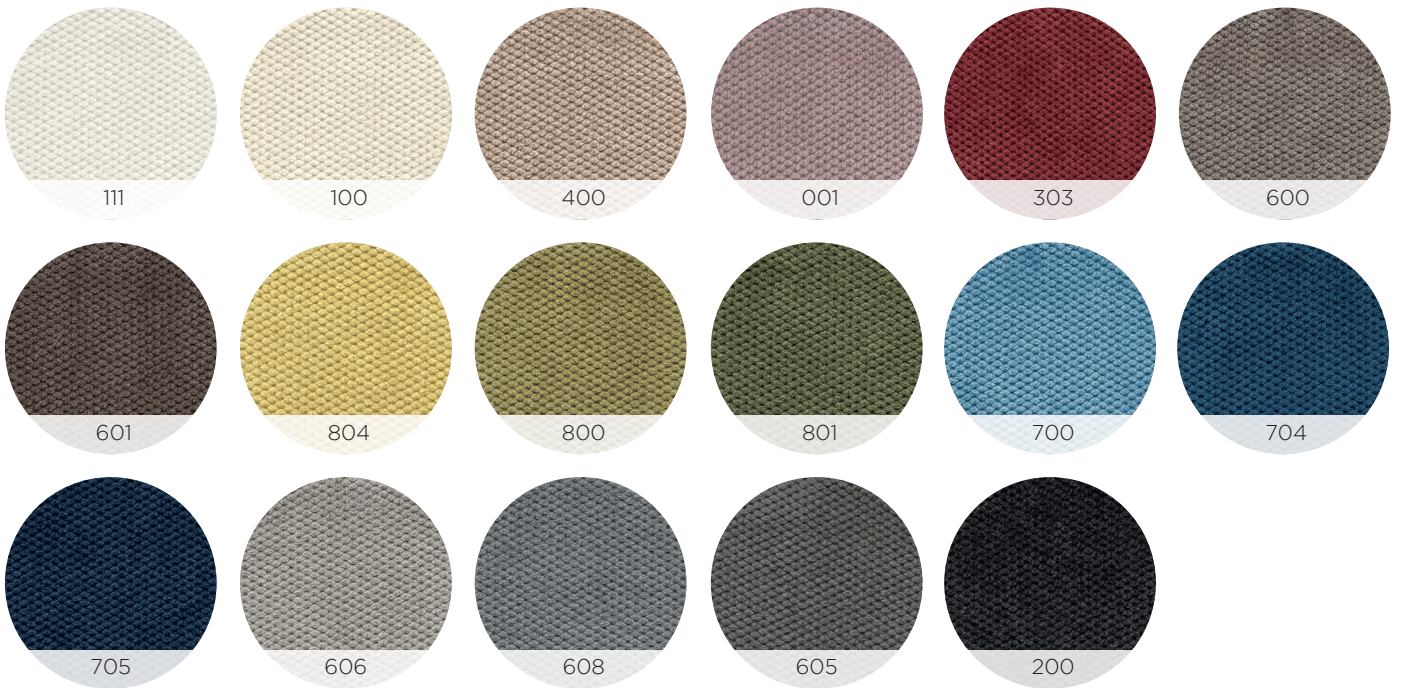

ROSA



COMPOSITION

75% cotton
20% acrylic
5% polyester

**COLOUR FASTNESS
TO LIGHT**

Note 5
UNI EN ISO 105-B02


PILLING

Note 3-4
UNI EN ISO 12945-2

MARTINDALE


65.000 rubs
UNI EN ISO 12947-2

CARE




NOTES


Slight differences in colour may occur

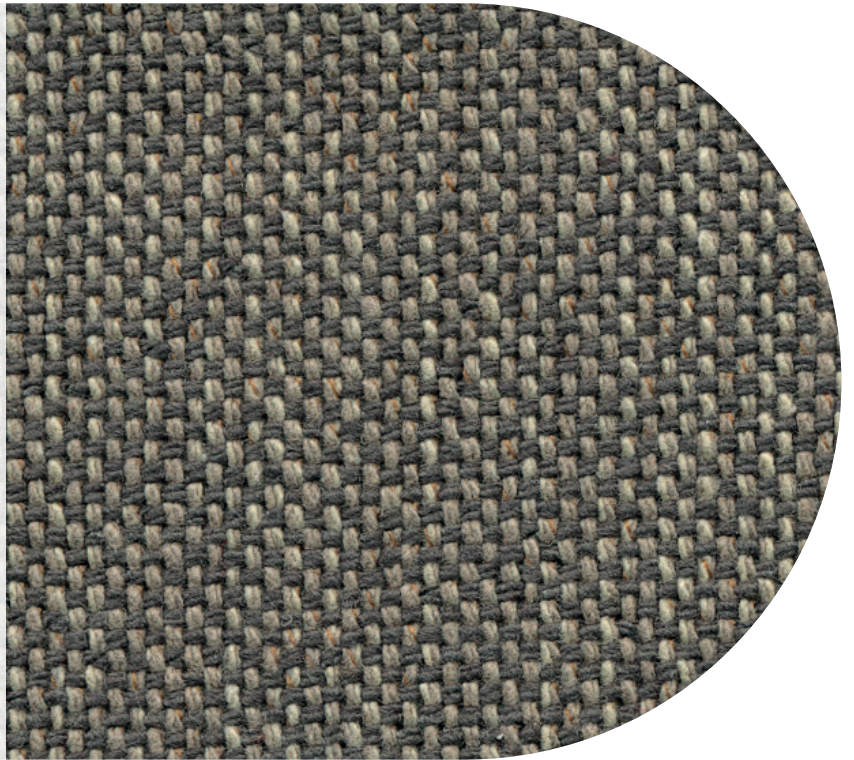


01




03




04




08




10




11



09



12



13

LAS VEGAS



COMPOSITION

85% cotton
15% viscose

**COLOUR FASTNESS
TO LIGHT**

Note 4-5
UNI EN ISO 105-B02

PILLING

Note 4
UNI EN ISO 12945-2

MARTINDALE

80.000 rubs
UNI EN ISO 12947-2







anti stain treatment

CARE




NOTES

Slight differences in colour may occur



PARIGI

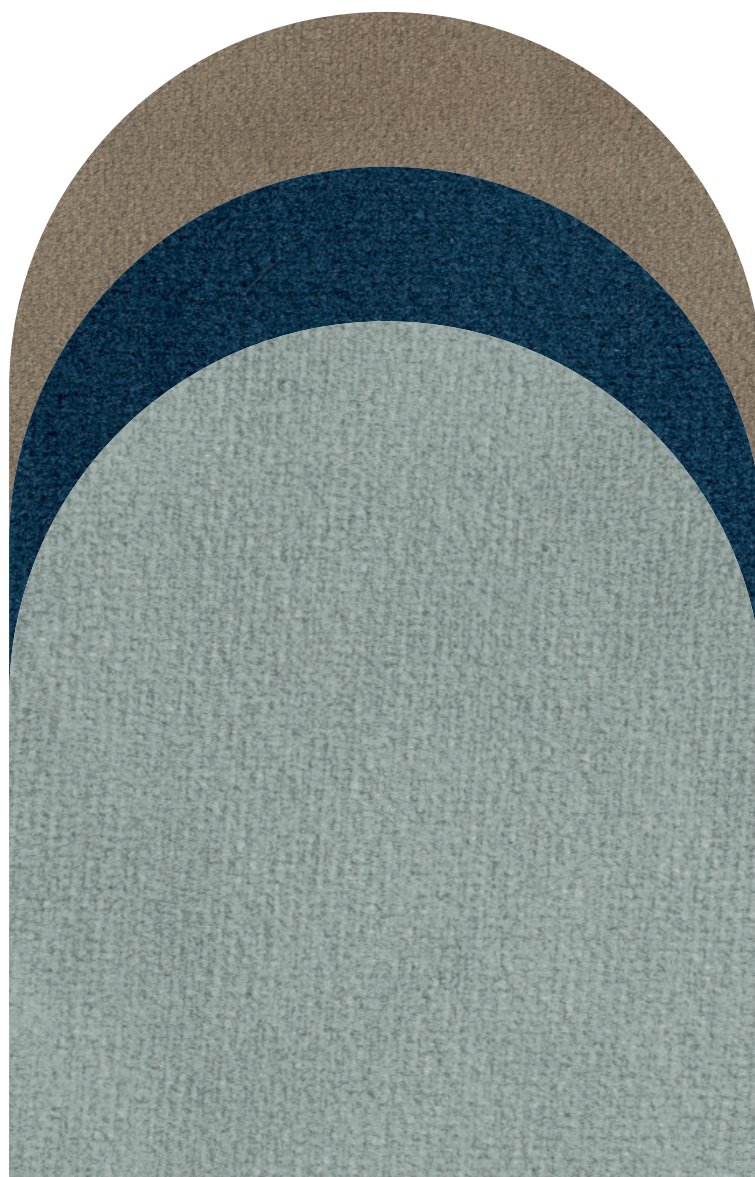

COMPOSITION

100% polyester

**COLOUR FASTNESS
TO LIGHT**

Note 4
UNI EN ISO 105-B02

PILLING


Note 4-5
UNI EN ISO 12945-2

MARTINDALE

100.000 rubs
UNI EN ISO 12947-2








water repellent treatment

CARE




NOTES

Slight differences in colour may occur



WOW

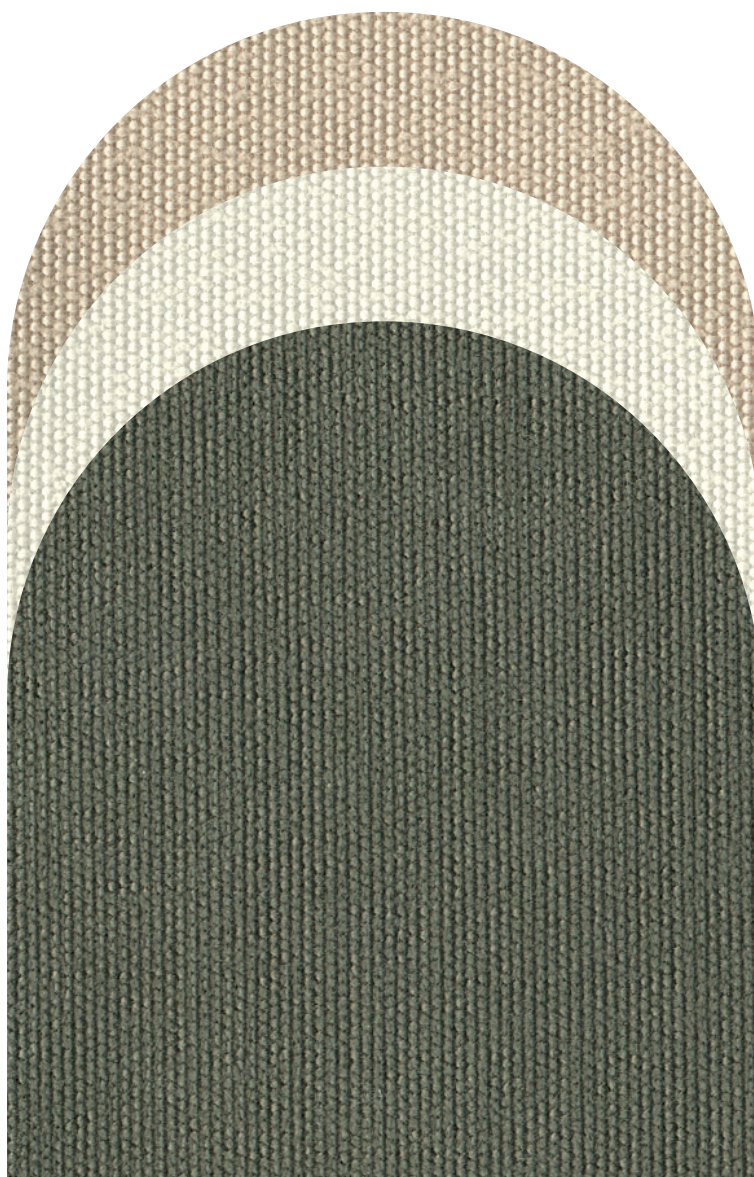

COMPOSITION

100% polyester

COLOUR FASTNESS

TO LIGHT

Note 3/4

UNI ENI ISO 105-B02

PILLING

Note 4-5

UNI ENI ISO 12945-2

MARTINDALE


70.000 rubs

UNI ENI ISO 12947-2

water repellent treatment


anti stain treatment

CARE




NOTES

Slight differences in colour may occur

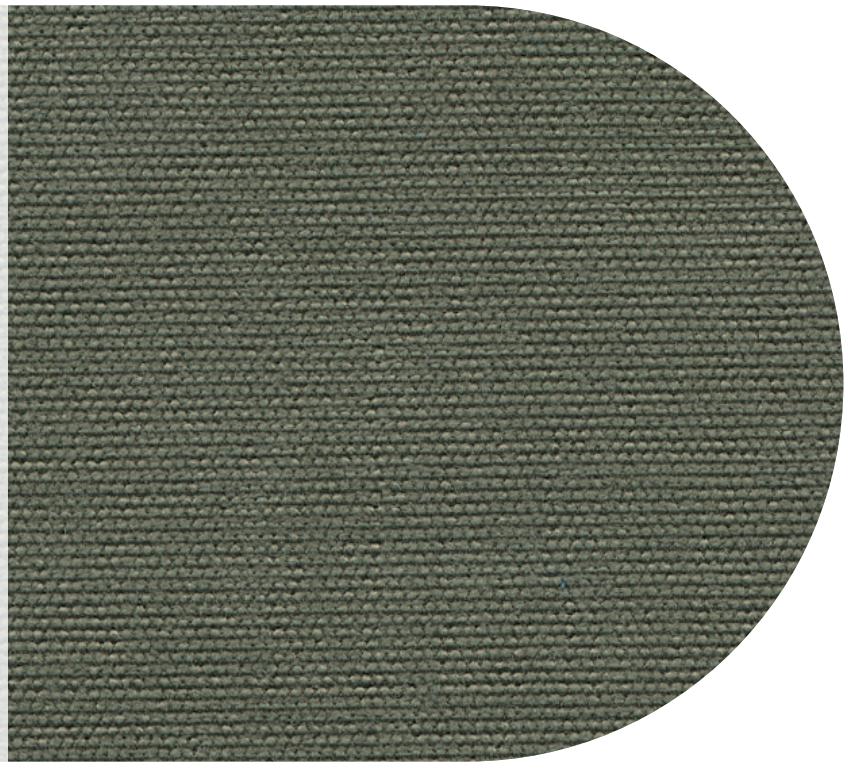

100




111




400



008




300




605




501




801



606




711



705




703



600

RALLY

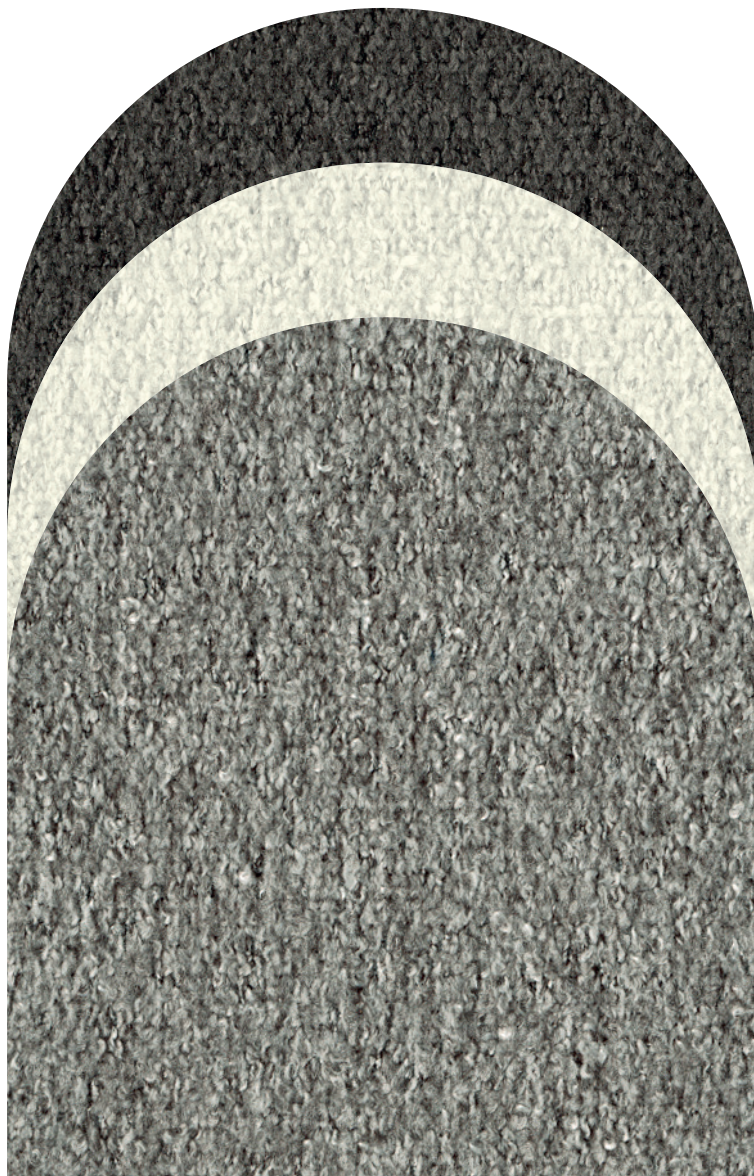

COMPOSITION

100% polyester

COLOUR FASTNESS

TO LIGHT

Note 3/4

UNI EN ISO 105-B02

PILLING

Note 4

UNI EN ISO 12945-2

MARTINDALE

40.000 rubs

UNI EN ISO 12947-2

water repellent treatment


anti stain treatment

CARE



NOTES

Slight differences in colour may occur



111



602



406




403



601



600



200

PATCHWORK | DEDAR



COMPOSITION

60% PES FR TREVIRA
40% PES FR

**COLOUR FASTNESS
TO LIGHT**

Note 6-7
EN ISO 105-B02

PILLING

Note 3-4 @ 5000 rubs
ISO 12945

MARTINDALE


11.000 rubs
UNI ENI ISO 12947-2

CARE




NOTES

Slight differences in colour may occur




010



012




014




011




004




005




006



007



008



013

PROUST | DEDAR



COMPOSITION

100% PES

COLOUR FASTNESS

TO LIGHT

Note 3-4

EN ISO 105-B02

PILLING

Note 5 @ 5.000 rubs

ISO 12945

MARTINDALE

40.000 rubs


UNI ENI ISO 12947-2

CARE



NOTES


Slight differences in colour may occur

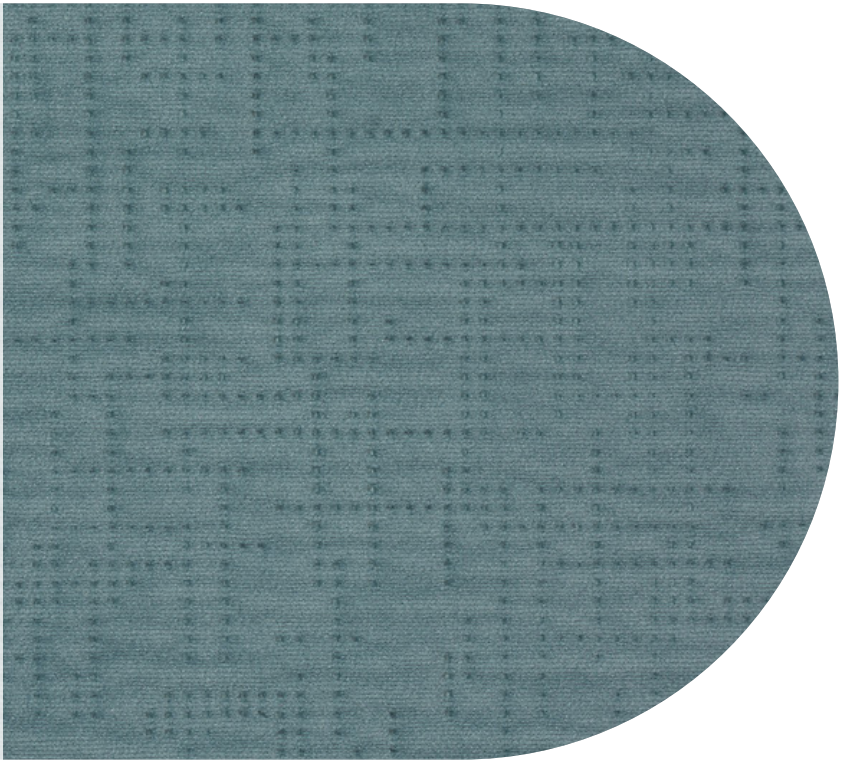


012



013




014




015




007



001




008




004




002



010




016



011

CANVAS 2 | KVADRAT

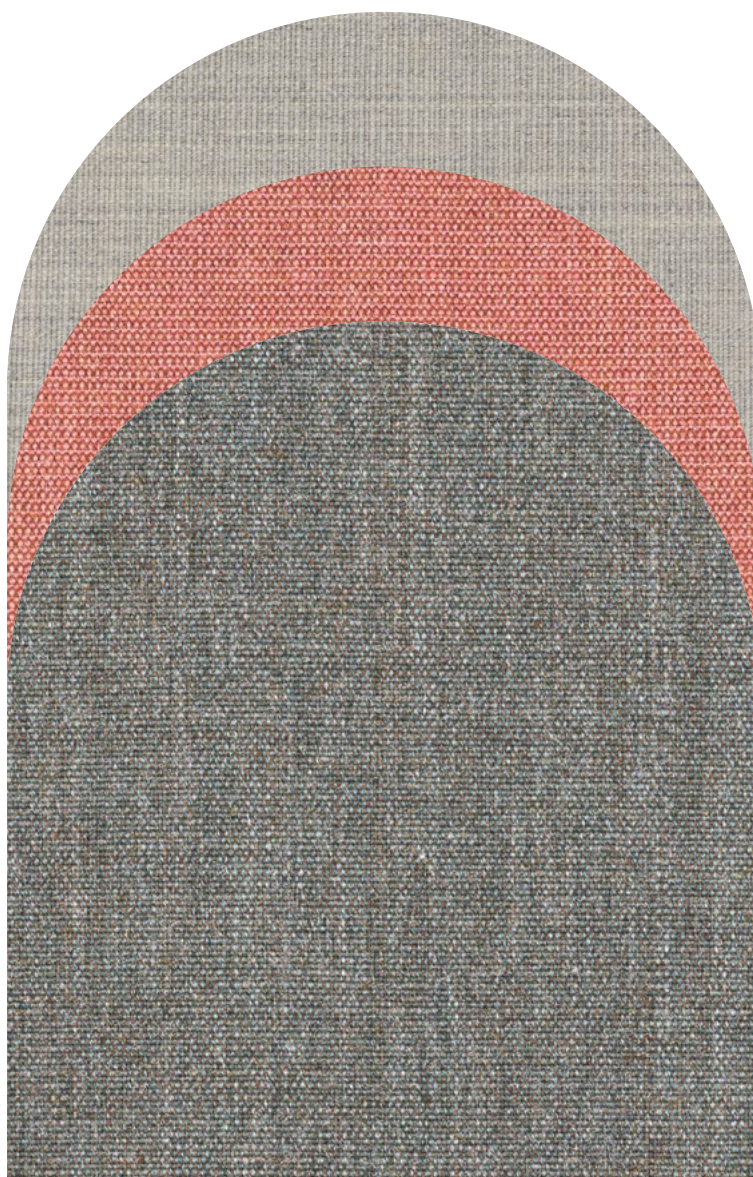

COMPOSITION

90% new wool
10% nylon

COLOUR FASTNESS

TO LIGHT

Note 5-7
ISO 105-B02

PILLING

Note 4-5
EN ISO 12945

MARTINDALE

100.000 rubs
EN ISO 12947

FIRETEST



EN 1021 - 1/2; DIN 4102 B2; Önorm B1/Q1;
NF D60 013; UNI 9175 11M; IMO A.652(16);
US Cal Tech Bull 117; BS 5852 part 1;
BS 5852 ignition source 2-3

CARE




NOTES

Slight differences in colour may occur

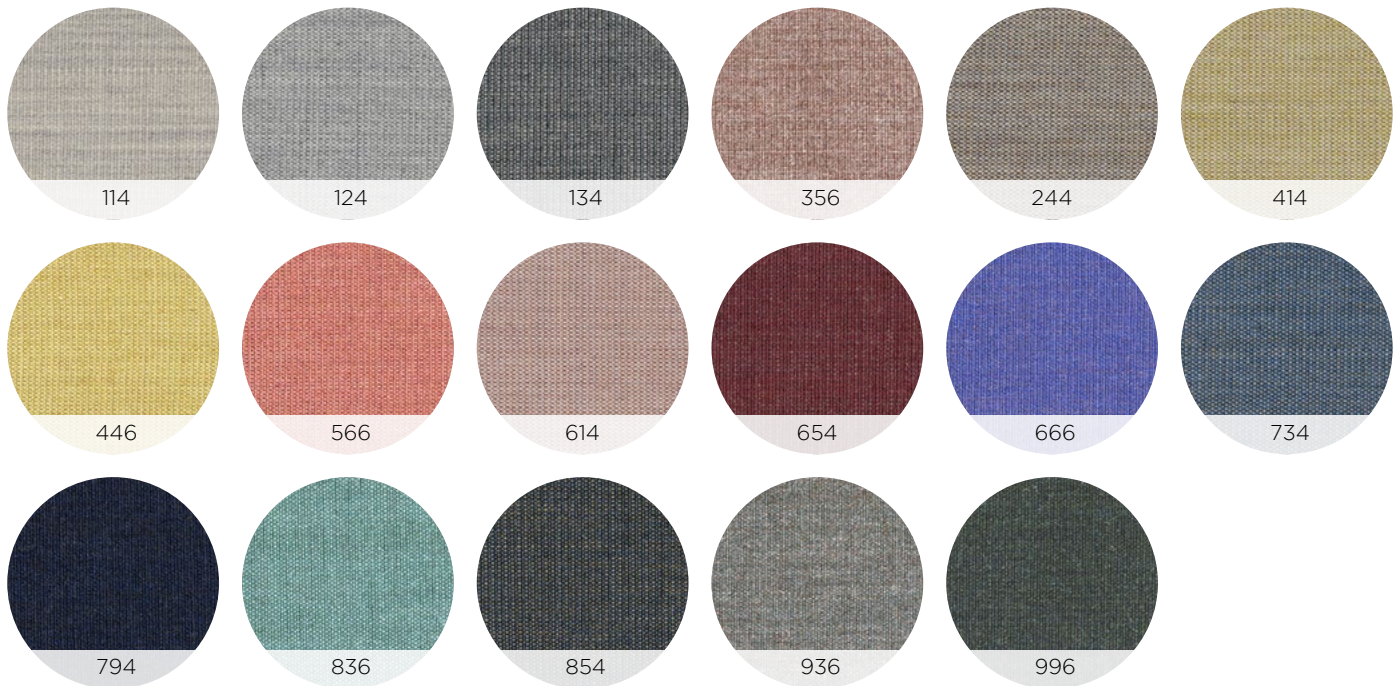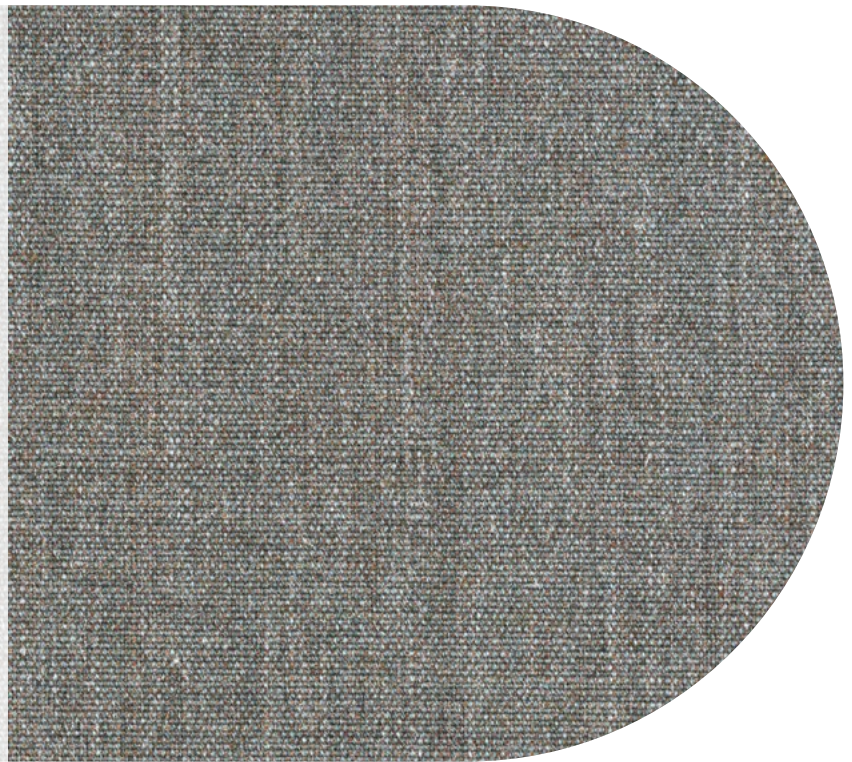

RAAS | KVADRAT

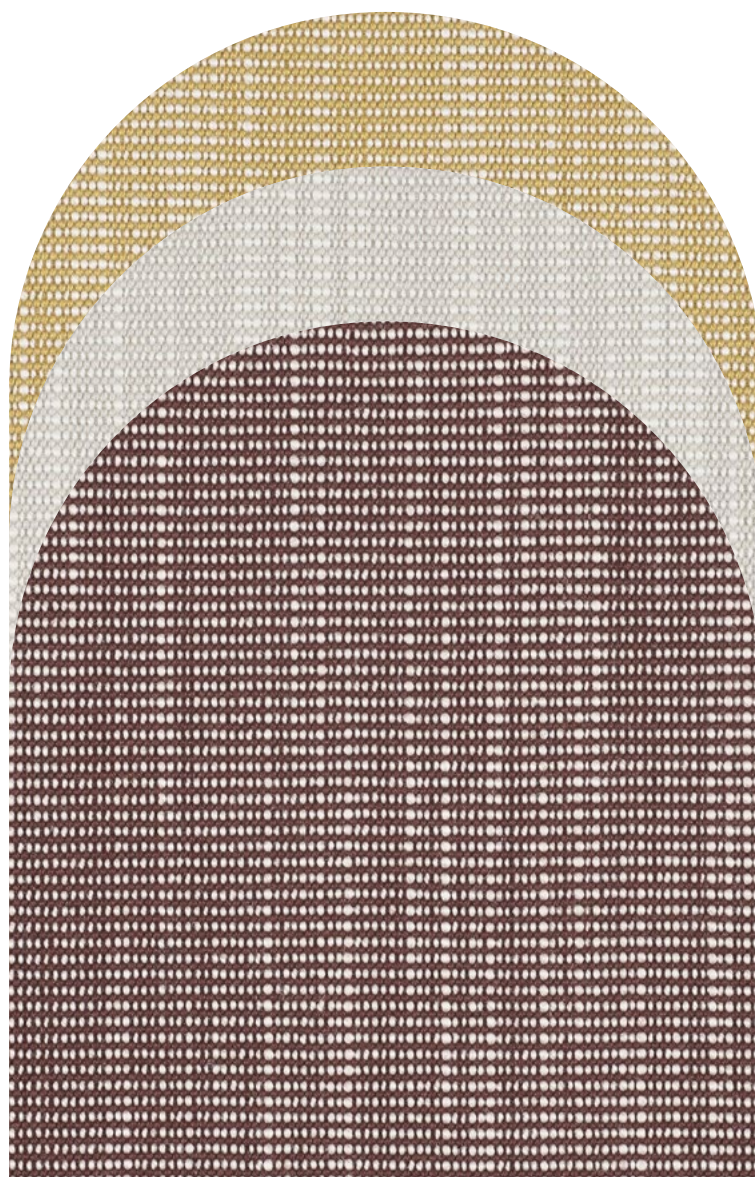

COMPOSITION

92% new wool
8% nylon

COLOUR FASTNESS

TO LIGHT

Note 6-7
ISO 105-B02

PILLING

Note 4-5
EN ISO 12945


MARTINDALE

100.000 rubs
EN ISO 12947

FIRETEST
















BS 5852 ignition source 3; BS 5852 part1;
EN 1021 - 1/2; Önorm B2/Q1; NF D60 013;
UNI 9175 1IM; IMO FTP code 2010: part8;
US Cal Bull 117-2013;

CARE



NOTES

Slight differences in colour may occur

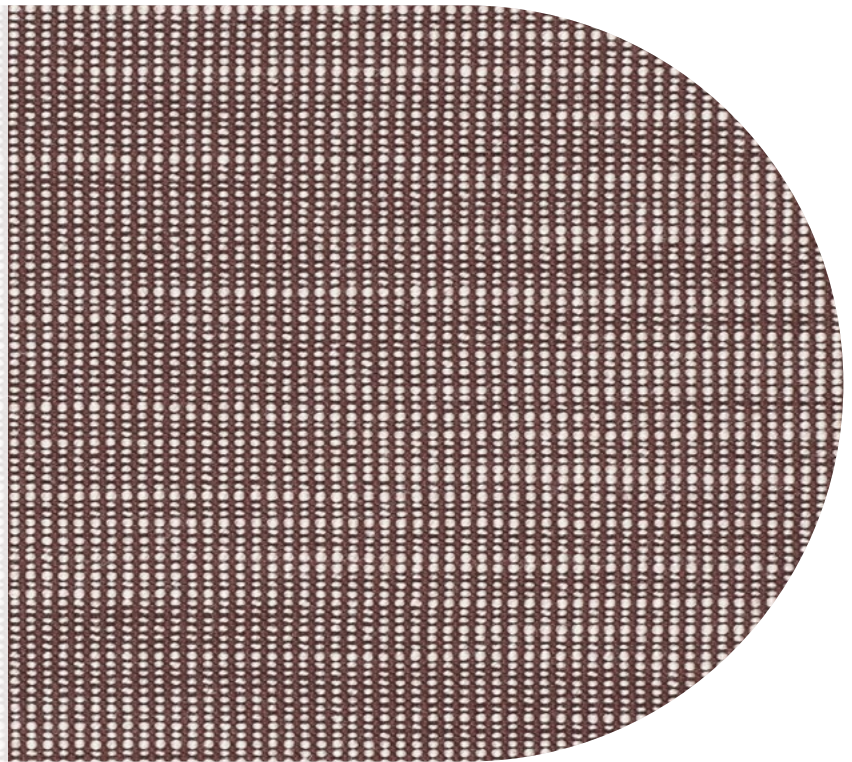

SKYE | KVADRAT



COMPOSITION

90% new wool
10% nylon

**COLOUR FASTNESS
TO LIGHT**

Note 6
ISO 105-B02

PILLING

Note 4
EN ISO 12945

MARTINDALE

60.000 rubs
EN ISO 12947

FIRETEST



EN 1021-1/2; NF D60 013; UNI 9175 11M;
IMO FTP code 2010:part8;
US Cal Bull 117-2013; BS 5852 part1;
BS 5852 crib 5 with treatment

CARE



NOTES

Slight differences in colour may occur

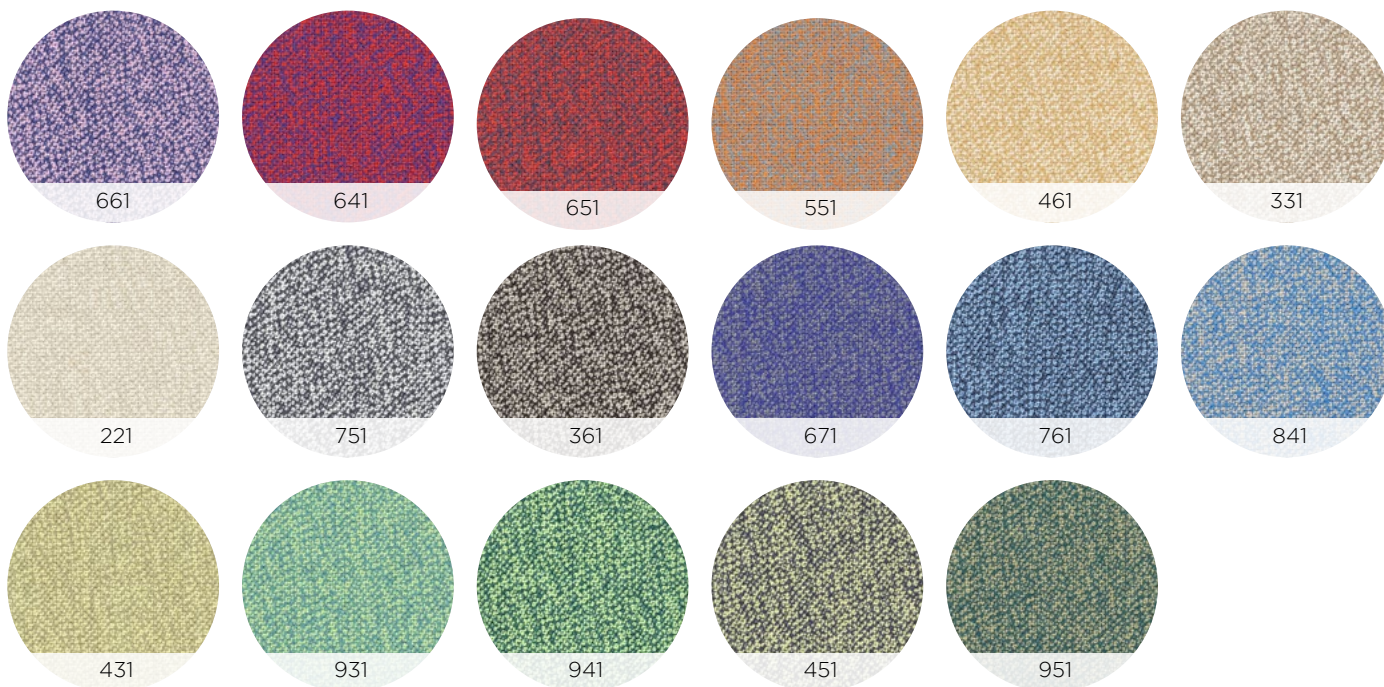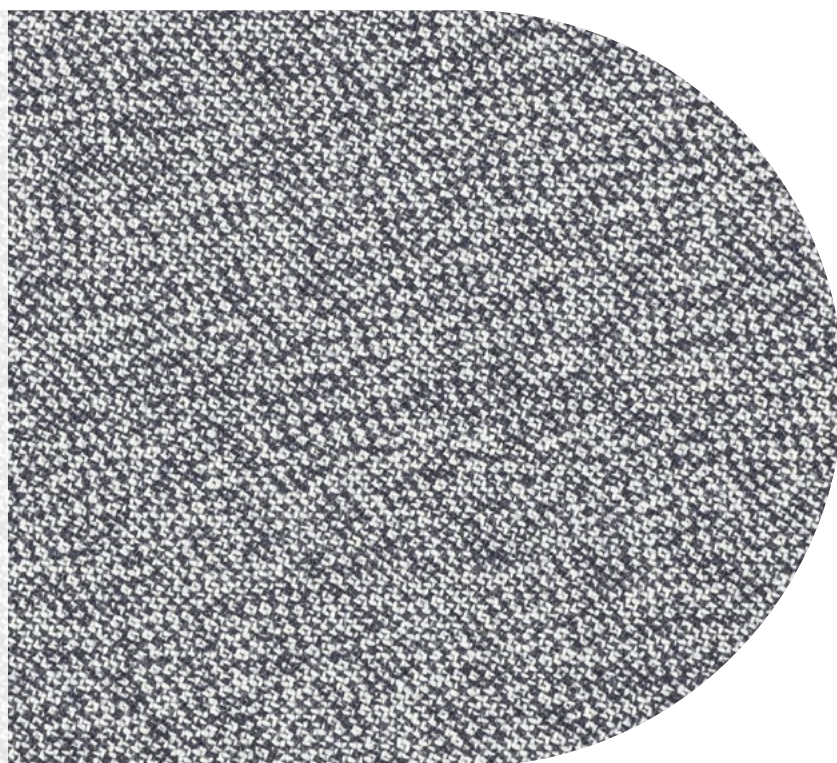

SETA



PHYSICAL SPEC.

**COLOUR FASTNESS
TO-AND-FRO RUBBING**

UNI EN ISO 11640
500 dry cycles,
≥ 4 degradation, ≥ 4 staining
UNI EN ISO 11640
250 wet cycles,
≥ 3/4 degradation, ≥ 3/4staining
UNI EN ISO 11640
80 alk. perspiration cycles,
≥ 3/4 degradation, ≥ 3/4staining

**COLOUR FASTNESS
TO LIGHT**

EN ISO 105-B02
xenotest, ≥ 4 blue scale

TEAR STRENGHT

UNI EN ISO 3377-1
≥ 20 N

WATER SPOTTING

UNI EN ISO 15700
≥ 3 grey scale

FINISH ADHESION

UNI EN ISO 11640
≥ 2 N/cm

FLEXING ENDURANCE

UNI EN ISO 5402
≥ 50.000 cycles

**COLD CRACK RESISTANCE OF
FINISH**

UNI EN ISO 3377-1
-15° , no crack

FIRE RESISTANCE

UNI EN 1021-1, UNI EN 1021-2,
BS 5852/0, BS 5852/1

TECHNICAL SPEC.

RAW MATERIAL/APPEARANCE
bovine/natural grain

THICKNESS

0,9 - 1,0 mm

TANNING

mineral chrome


COLOR TYPE

solid tone

DYEING

through-dyeing Aniline



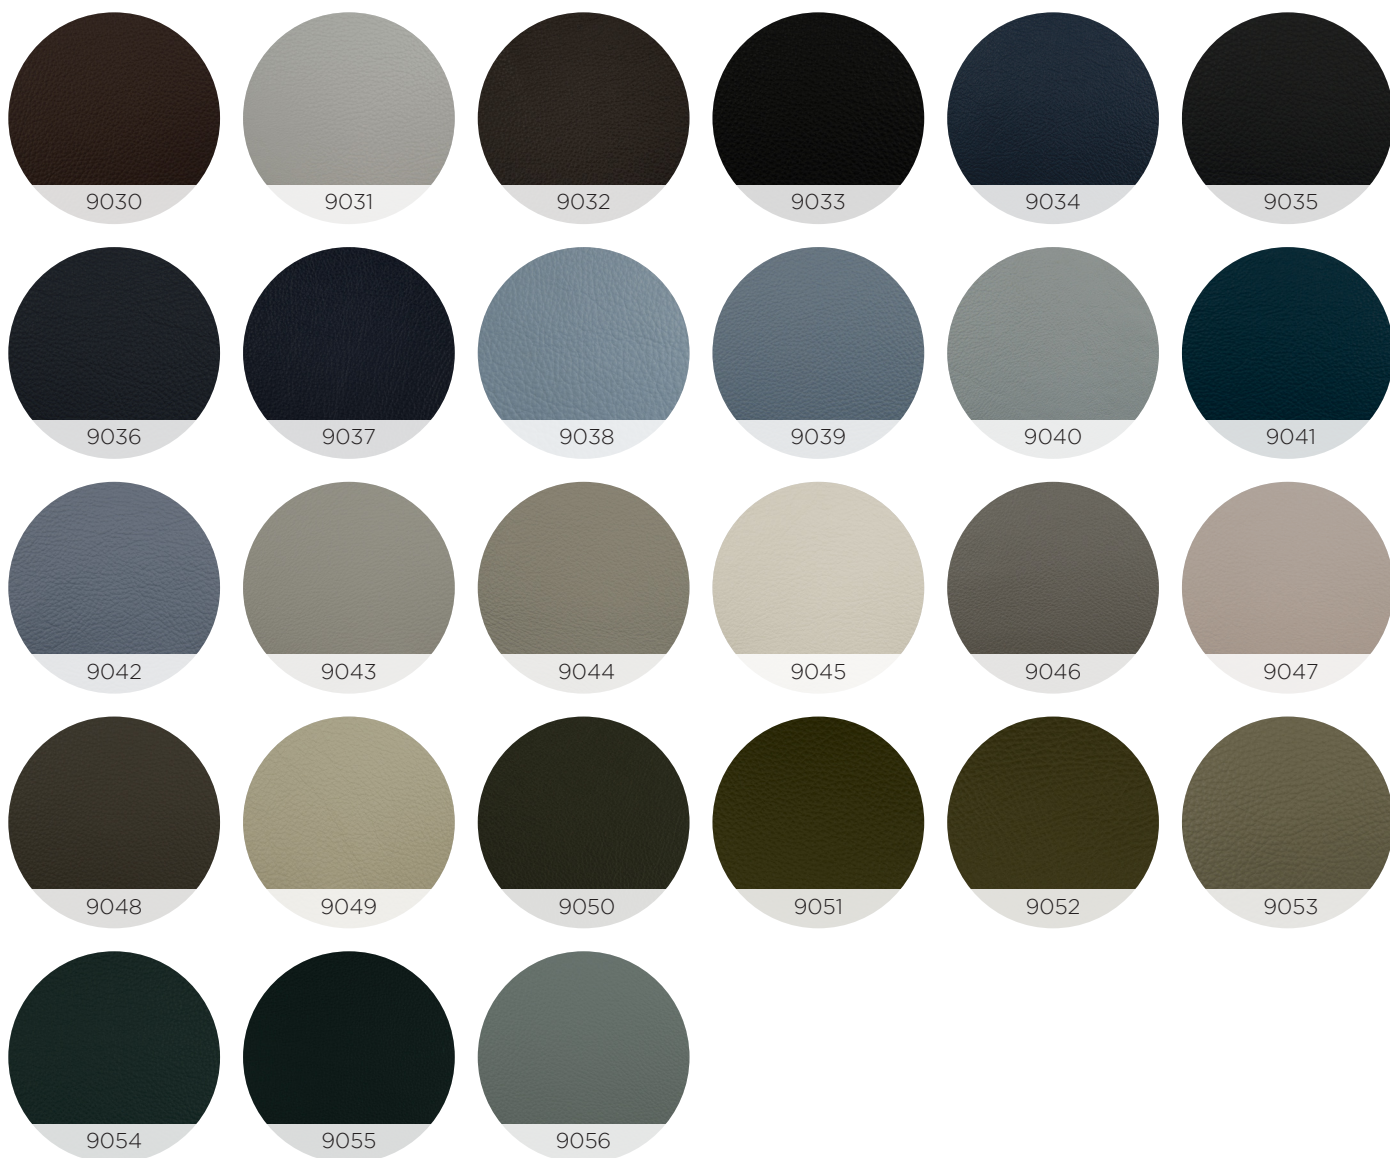

STAR



PHYSICAL SPEC.

COLOUR FASTNESS TO-AND-FRO RUBBING

UNI EN ISO 11640
500 dry cycles,
≥ 4 degradation, ≥ 4 staining
UNI EN ISO 11640
250 wet cycles,
≥ 3/4 degradation, ≥ 3/4staining
UNI EN ISO 11640
80 alk. perspiration cycles,
≥ 3/4 degradation, ≥ 3/4staining

COLOUR FASTNESS TO LIGHT

EN ISO 105-B02
xenotest, ≥ 4 blue scale

TEAR STRENGTH

UNI EN ISO 3377-1
≥ 20 N

WATER SPOTTING

UNI EN ISO 15700
≥ 3 grey scale

FINISH ADHESION

UNI EN ISO 11640
≥ 2 N/cm

FLEXING ENDURANCE

UNI EN ISO 5402
≥ 50.000 cycles

COLD CRACK RESISTANCE OF FINISH

UNI EN ISO 3377-1
-15° , no crack

FIRE RESISTANCE

UNI EN 1021-1, UNI EN 1021-2,
BS 5852/0, BS 5852/1

TECHNICAL SPEC.

THICKNESS

0,9 - 1,0 mm

TANNING

mineral chrome

COLOR TYPE

solid tone

DYEING

through-dyeing Aniline



GENERAL WARNINGS

slight differences in colour may occur

MAINTENANCE AND CLEANING

dust with a soft and dry cloth; remove stains using a damp cloth and neutral soap or a delicate detergent. Buffer from the edges to the stain centre. No abrasive/aggressive products; no product for shoes cleaning; no steam; no direct sunlight; no direct heat

ST. MORITZ



COMPOSITION

80% wool
20% polyamide

**COLOUR FASTNESS
TO LIGHT**

Note 5
UNI EN ISO 105-B02

PILLING

Note 3
UNI EN 1512434 0

MARTINDALE

80.000 rubs
UNI EN ISO 12947-2

FIRETEST


EN 1021-1
EN 1021-2
A.652(16)

CARE




NOTES

Slight differences in colour may occur

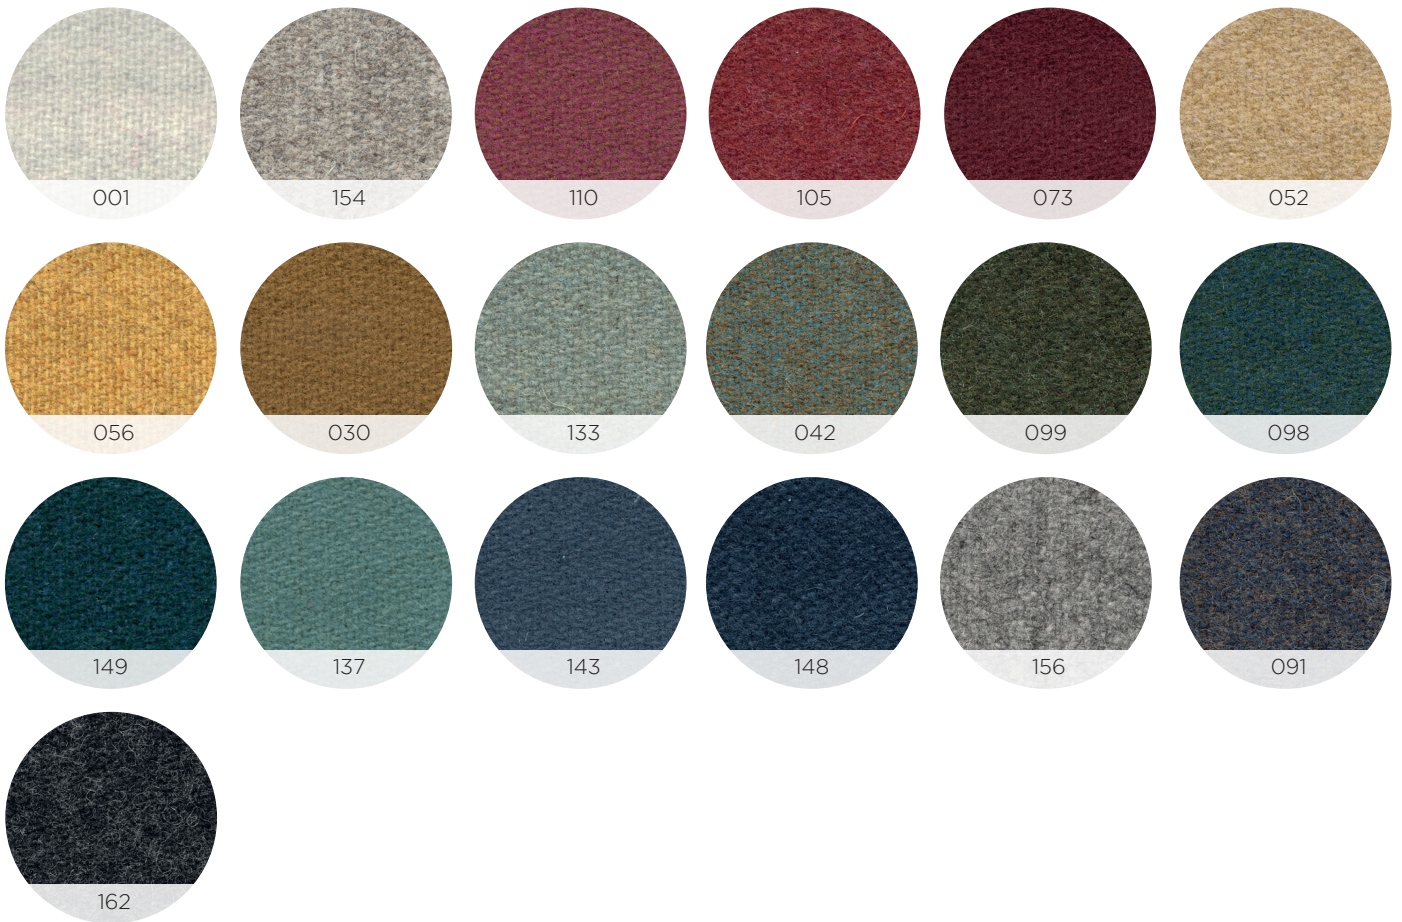

LITTLE BLAKE

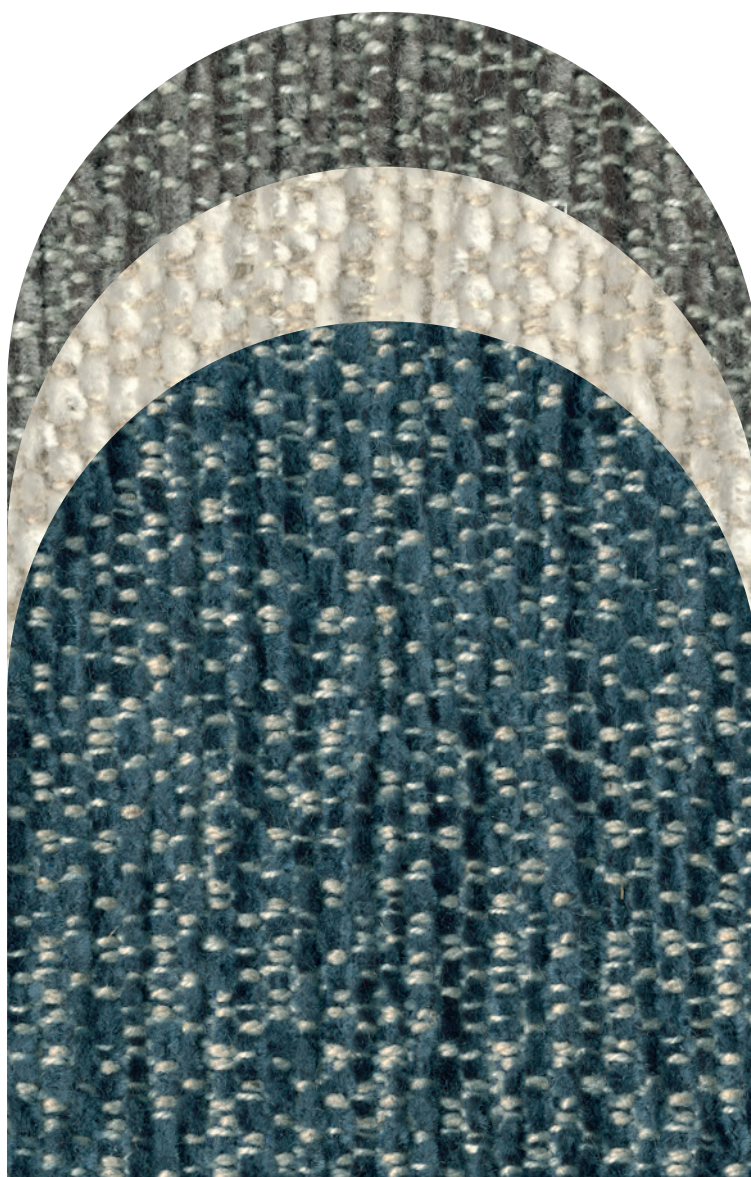

COMPOSITION

46% cotton
10% linen
28% acrylic
10% polyester

**COLOUR FASTNESS
TO LIGHT**

Note 5
UNI ENI ISO 105-B02

PILLING

Note 4-5 @ 2.000
UNI ENI ISO 12945-2

MARTINDALE


30.000 rubs
UNI ENI ISO 12947-2

CARE




NOTES

Slight differences in colour may occur

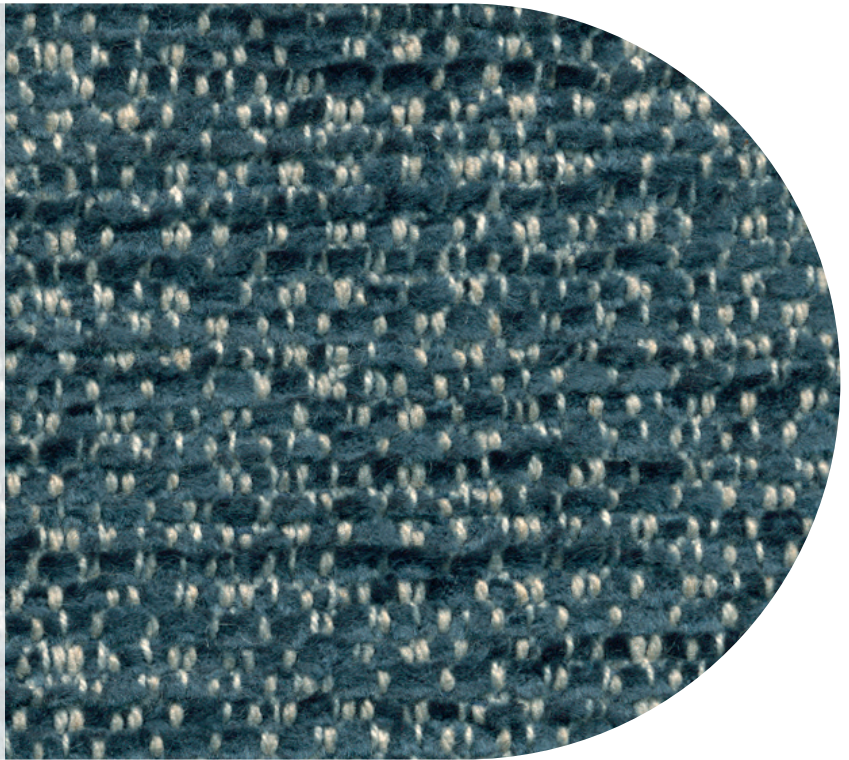


4000



4001




4012



4006



4007



4008




4002




4004




4005



4011




4009



4014



4017



4018



4020

REGAL



COMPOSITION

100% cotton


**COLOUR FASTNESS
TO LIGHT**

light color: note 3-4
dark color: note 4
EN ISO 105-B02

MARTINDALE


100.000 rubs
UN ENI ISO 12947-2

CARE



NOTES

Slight differences in colour may occur

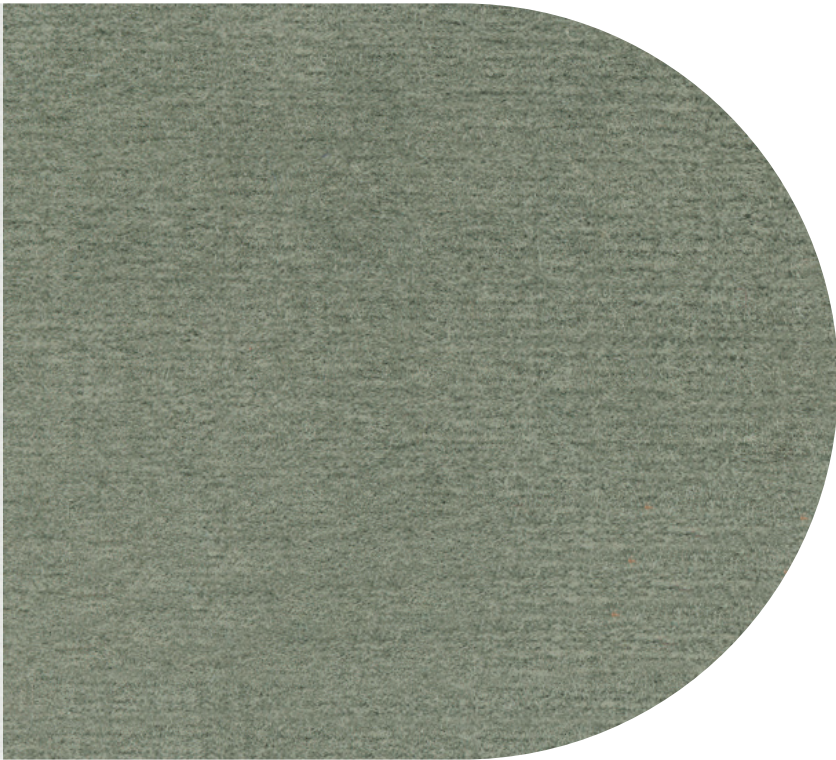


E001




E030



E013



E016



E018



E012



E010



E006



E003



E035




E039



E037




E047



E044



E045




E048



E049

CAPRI

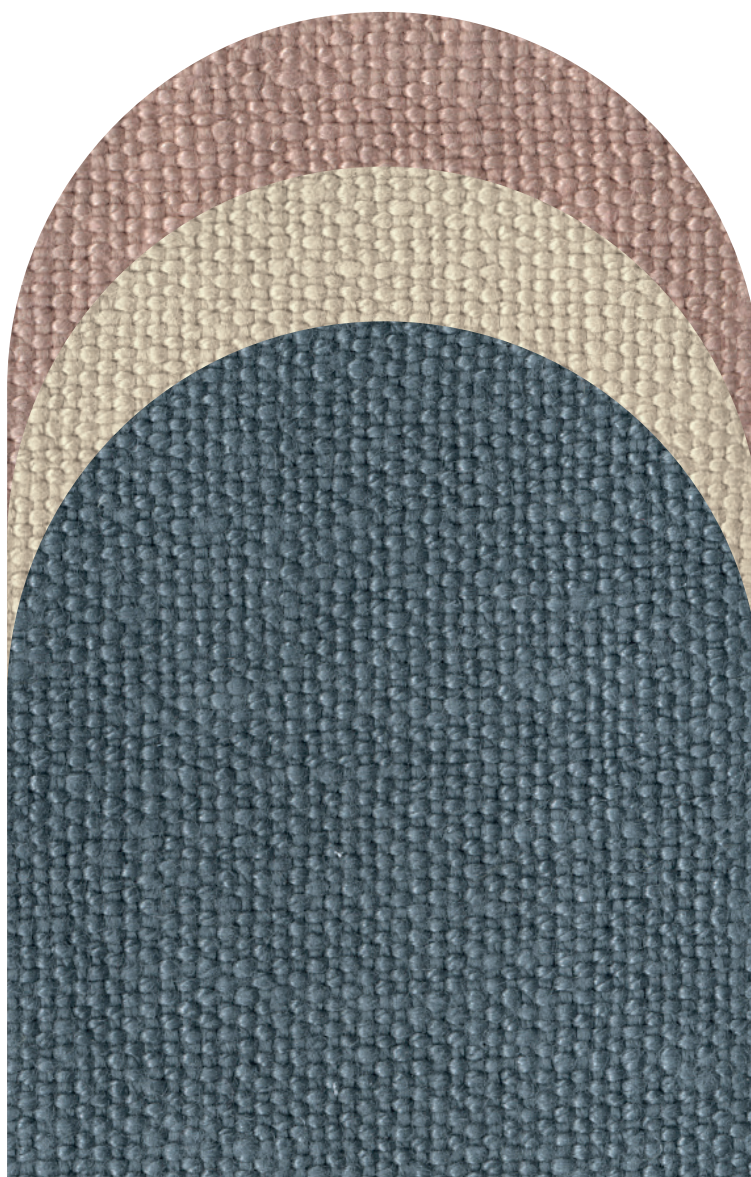

COMPOSITION

100% linen

COLOUR FASTNESS

TO LIGHT

Note 6

UNI EN ISO 105-B02

PILLING

Note 3/4

UNI EN ISO 12945-2

MARTINDALE


30.000 rubs

UNI EN ISO 12947-2

FIRETEST



BS 5852:1979 PART 0

CARE



NOTES


Slight differences in colour may occur

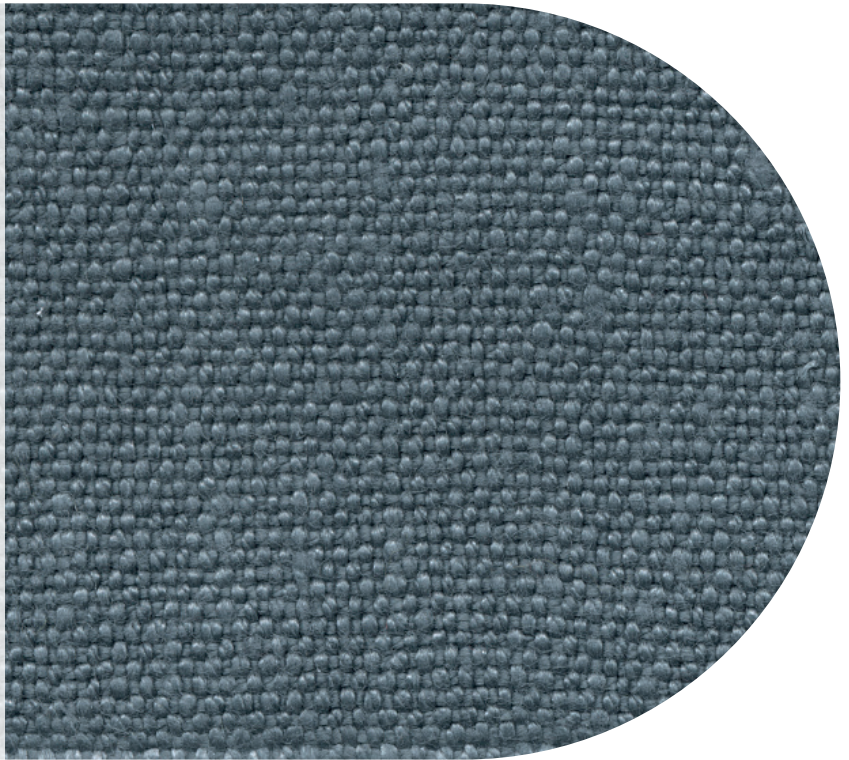


01




02




03



41



09




08




13




25




33




34




28



29




36



38

ALMORÒ | RUBELLI

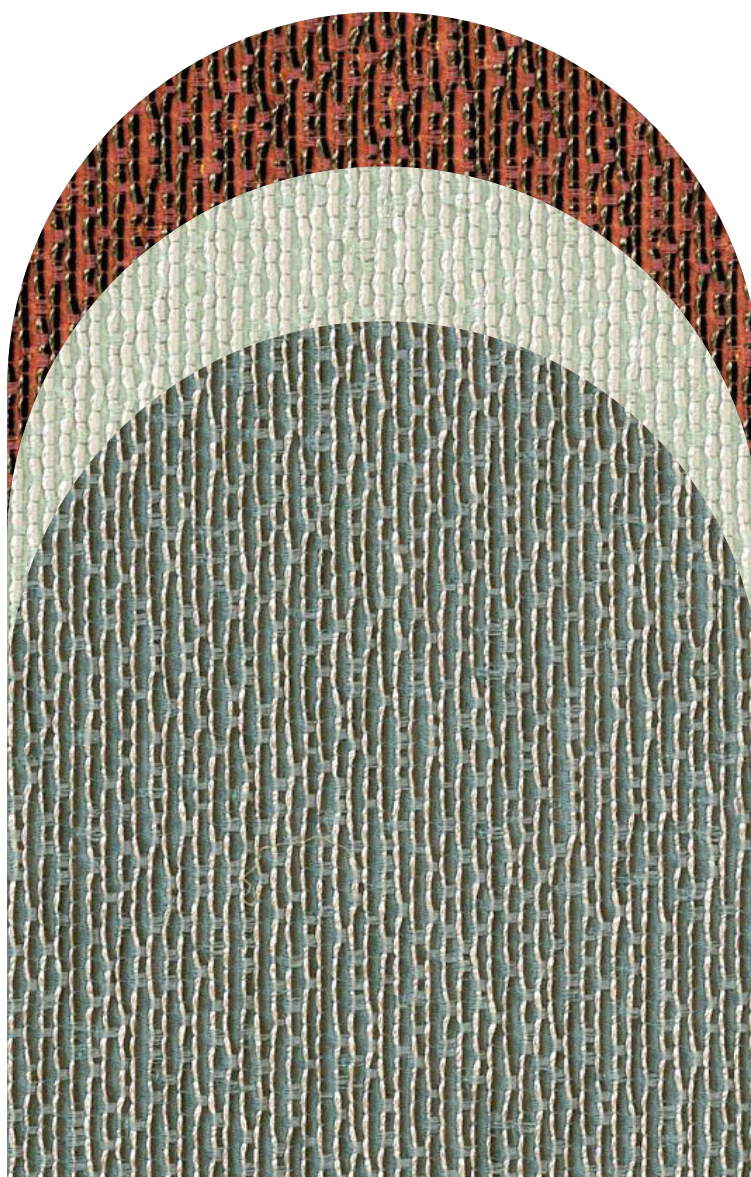

COMPOSITION

40% polyamide
29% spun ryon
29% cotton
2% a

COLOUR FASTNESS

TO LIGHT

Note 4-5 average


MARTINDALE

50.000 rubs

FIRETEST



UK cigarette BS5852 source 0

CARE



NOTES

Slight differences in colour may occur

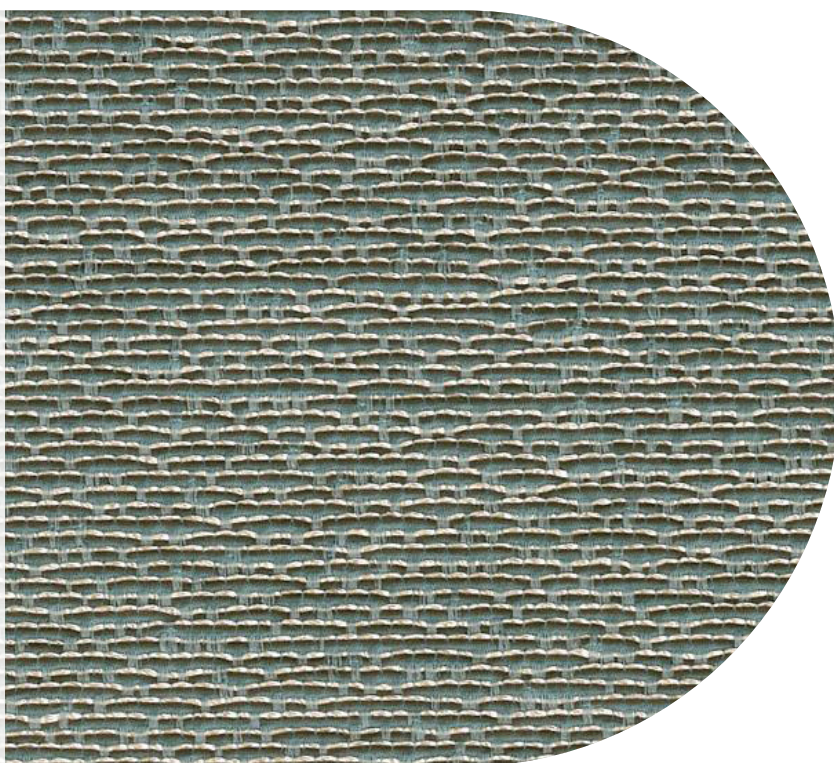


18



17




06




01



03



05




10




09



08



12



11

BEAT | RUBELLI



COMPOSITION

100% polyester Trevira CS

COLOUR FASTNESS

TO LIGHT

Note 4-5 average

MARTINDALE

20.000 rubs

EXTRA



Germany B1 DIN 4102-1
UK contract upholstery BS7176
UK contract curtains BS5867
Italia Classe 1 Tendaggi
France M1
NFP902-503-504-505
IMO 8 upholstery

CARE



NOTES

Slight differences in colour may occur

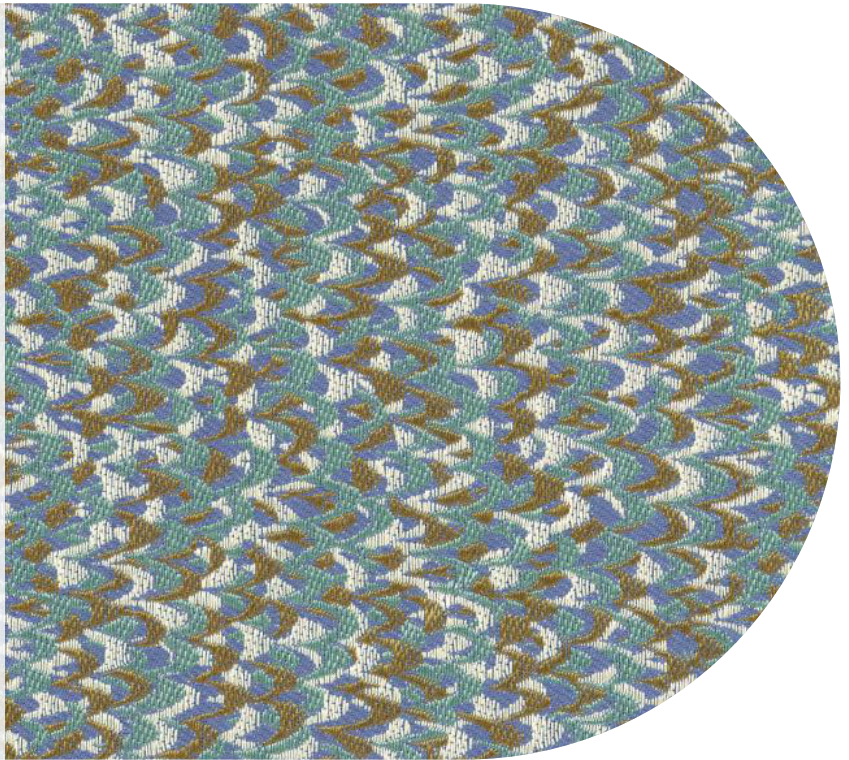

09



10



03



01



02



04



08



06



05



07

SONG | RUBELLI



COMPOSITION

56% polyester
44% polyamide

**COLOUR FASTNESS
TO LIGHT**

Note 4-5 average


MARTINDALE

45.000 rubs

FIRETEST

UK cigarette BS5852 source 0

CARE



NOTES

Slight differences in colour may occur



25



26



27



01



02



06



12



04




29



30



31



32




35




34



39



40



15