

DA 2450  
Extractor unit  
with energy-efficient LED lighting and rotary dials for easy use



- Customised kitchen design – fully integrated in 532 mm width
- Powerful – 590 m<sup>3</sup>/h on the booster setting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation

A

EAN: 4002515792209 / Material number: 10568390 / Old Material Number: 28245055GB

<b>Construction type</b>	
Integrated extractor	•
<b>Operating modes</b>	
Type of air guide	Convertible
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 15-P
<b>Design</b>	
Colour	Stainless steel
<b>User convenience</b>	
Electronic controls	•
Rotary knob	•
Power levels (number without Booster level)	2
<b>Efficiency and sustainability</b>	
Energy efficiency class (A+++ to D)	A
Annual energy consumption in kWh/year	52.6
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
<b>Cleaning convenience</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
<b>Lighting</b>	
LED	•
Number x W	2 x 3 W
Light intensity in lx	330 lx
Colour temperature in K	3000 Kelvin
<b>Blower</b>	
Dual-action fan	•
AC motor	•
<b>Extraction</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	230
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	350
Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	590
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	66.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	54.0
Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13	52.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	32.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40.0
<b>Recirculation</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	185
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	305

DA 2450

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use




EAN: 4002515792209 / Material number: 10568390 / Old Material Number: 28245055GB

Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	525
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	47.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
<b>Technical data</b>	
Canopy width in mm	532
Canopy height in mm	50
Canopy depth in mm	372
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	10.2
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.22
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
<b>Installation notes</b>	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
<b>Optional accessories</b>	
Active charcoal filter	Ja

DA 2450

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use

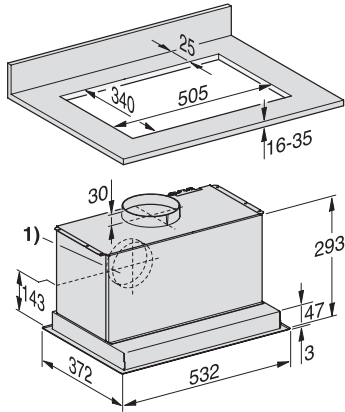

DA 2450, DA 2558 (Installation drawing)

1) Vent connection alternatively to rear, You will find further detailed measurements in the instructions for use!