

PUR 68 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting



- Timeless design – 598 mm wide stainless steel cooker hood
- Powerful – 650 m³/h on the booster setting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation

A

EAN: 4002515792971 / Material number: 10565920 / Old Material Number: 28416854GB

Construction type	
Wall mounted cooker hood	•
Operating modes	
Type of air guide	Convertible
Recirculation conversion kit (order separately)	DUW 20
Active charcoal filter (order separately)	DKF 12-P
Design	
Colour	Stainless steel
RAL colours available as customisation on request	•
Customisation possible on request	•
Variable height available as customisation on request	•
Variable width available as customisation on request	•
User convenience	
Electronic controls	•
Power levels (number without Booster level)	3
Programmable Booster level switch-off	•
Efficiency and sustainability	
Energy efficiency class (A+++ to D)	A
Annual energy consumption in kWh/year	47.0
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in Lx	330 lx
Colour temperature in K	3000 Kelvin
Blower	
Dual-action fan	•
AC motor	•
Extraction	
Air throughput in Level 1 (m ³ /h) according to EN 61591	265
Air throughput in Level 2 (m ³ /h) according to EN 61591	320
Air throughput in Level 3 (m ³ /h) according to EN 61591	395
Air throughput in Booster level (m ³ /h) according to EN 61591	650
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	67.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	56.0
Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13	52.0

PUR 68 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting



EAN: 4002515792971 / Material number: 10565920 / Old Material Number: 28416854GB

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	32.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	41.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	190
Air throughput in Level 2 (m ³ /h) according to EN 61591	270
Air throughput in Level 3 (m ³ /h) according to EN 61591	330
Air throughput in Booster level (m ³ /h) according to EN 61591	460
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	54.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	60.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	64.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	45.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	56.0
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	598
Overall height for vented and external in in. (mm)	685
Overall height for extraction mode and external mode cooker hoods in mm	1005
Canopy height in mm	62
Overall height for recirculation in in. (mm)	815
Canopy depth in mm	500
Overall height for recirculation mode cooker hoods in mm	1135
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	21.0
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.22
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•

PUR 68 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting




EAN: 4002515792971 / Material number: 10565920 / Old Material Number: 28416854GB

Diameter of exhaust duct in mm	150
Telescopic chimney	•
Optional accessories	
Active charcoal filter	Nein
Active charcoal filter, can be reactivated	DKF 12-R

PUR 68 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting

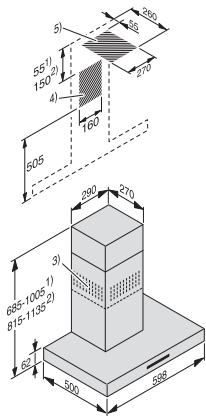

DA 416-6, DA 416-7 (Installation drawing)

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)