


Epulo 18 flood 40° Gray/white

Ernesto Gismondi



IP65  

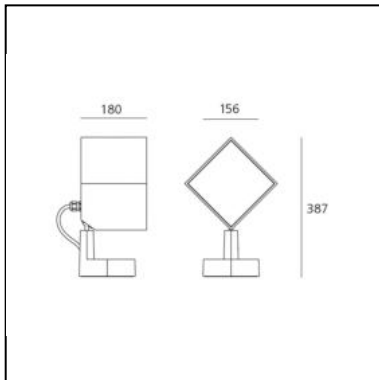

LUMINAIRE

- Watt: **37W**
- Voltage: **220V-240 V**
- Delivered lumens output: **2110lm**
- CCT: **3000K**
- Efficiency: **81%**
- Efficacy: **57.04lm/W**
- CRI: **80**

DESCRIPTION

Light fixture with adjustable direct emission, with high-performance LED light sources. Floor, wall and eaves installation. 2 sizes: Epulo 13 and Epulo 18. Available in two finishes: grey-white painted and anthracite grey painted. Composed by lighting unit, terminal board and fixing bracket. Rotation on the base +/-180°, side body tilt +/-45° and front body tilt +0/-90 by means of a spherical joint allowing an accurate adjustment. Body and terminal board in EN AB44100 aluminium, fixing bracket in stainless steel, silicone gaskets. Electronic ballast integrated in the body. Silkscreened tempered glass siliconed flush with the body to avoid backwater. IP67 connector for electric connection to the mains, it can be housed in the terminal board compartment and is suitable for cables with a diameter of 5-13.5mm. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 3 colour temperatures: Warm = 3000K Neutral = 4000K Cold = 6000K Screws in AISI 316 stainless steel. The components in die-cast aluminium and the steel bracket are painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Technical features of light fixtures in compliance with EN60598-1 and part 2-5. IP Rating IP65. Insulation class I.

PRODUCT CODE: T418839W00

FEATURES

- Article Code: **T418839W00**
- Colour: **Gray/white**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 15.6**
- Width: **cm 18**
- Height: **cm 38.7**
- Impact Resistance: **IK06**

SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **38W**
- Color temperature (K): **3000K**
- CRI: **80**

Epulo 18 spot 6° Gray/white

Ernesto Gismondi



IP65  

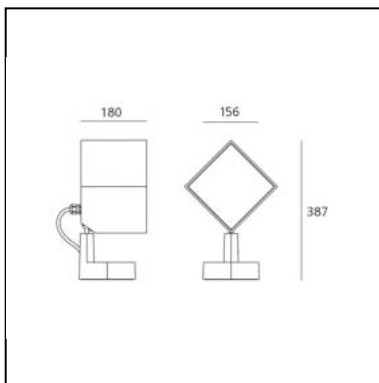

LUMINAIRE

- Watt: **37W**
- Voltage: **220V-240 V**
- Delivered lumens output: **2189lm**
- CCT: **3000K**
- Efficiency: **84%**
- Efficacy: **59.15lm/W**
- CRI: **80**

DESCRIPTION

Light fixture with adjustable direct emission, with high-performance LED light sources. Floor, wall and eaves installation. 2 sizes: Epulo 13 and Epulo 18. Available in two finishes: grey-white painted and anthracite grey painted. Composed by lighting unit, terminal board and fixing bracket. Rotation on the base +/-180°, side body tilt +/-45° and front body tilt +0/-90 by means of a spherical joint allowing an accurate adjustment. Body and terminal board in EN AB44100 aluminium, fixing bracket in stainless steel, silicone gaskets. Electronic ballast integrated in the body. Silkscreened tempered glass siliconed flush with the body to avoid backwater. IP67 connector for electric connection to the mains, it can be housed in the terminal board compartment and is suitable for cables with a diameter of 5-13.5mm. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 3 colour temperatures: Warm = 3000K Neutral = 4000K Cold = 6000K Screws in AISI 316 stainless steel. The components in die-cast aluminium and the steel bracket are painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Technical features of light fixtures in compliance with EN60598-1 and part 2-5. IP Rating IP65. Insulation class I.

PRODUCT CODE: T418810W00

FEATURES

- Article Code: **T418810W00**
- Colour: **Gray/white**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 15.6**
- Width: **cm 18**
- Height: **cm 38.7**
- Impact Resistance: **IK06**

SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **38W**
- Color temperature (K): **3000K**
- CRI: **80**

Epulo 18 wall washer EL Anthracite gray

Ernesto Gismondi



IP65  

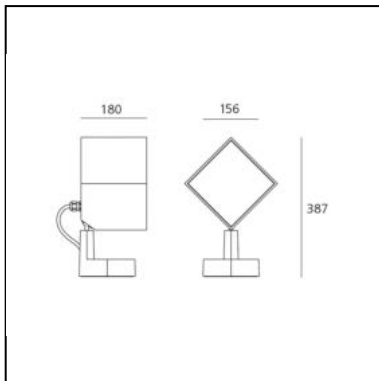

LUMINAIRE

- Watt: **37W**
- Voltage: **220V-240 V**
- Delivered lumens output: **2137lm**
- CCT: **3000K**
- Efficiency: **82%**
- Efficacy: **57.74lm/W**
- CRI: **80**

DESCRIPTION

Light fixture with adjustable direct emission, with high-performance LED light sources. Floor, wall and eaves installation. 2 sizes: Epulo 13 and Epulo 18. Available in two finishes: grey-white painted and anthracite grey painted. Composed by lighting unit, terminal board and fixing bracket. Rotation on the base +/-180°, side body tilt +/-45° and front body tilt +/-90° by means of a spherical joint allowing an accurate adjustment. Body and terminal board in EN AB44100 aluminium, fixing bracket in stainless steel, silicone gaskets. Electronic ballast integrated in the body. Silkscreened tempered glass siliconed flush with the body to avoid backwater. IP67 connector for electric connection to the mains, it can be housed in the terminal board compartment and is suitable for cables with a diameter of 5-13.5mm. PMMA lenses in 3 different versions of beams. White monochromatic LEDs available in 3 colour temperatures: Warm = 3000K Neutral = 4000K Cold = 6000K Screws in AISI 316 stainless steel. The components in die-cast aluminium and the steel bracket are painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Technical features of light fixtures in compliance with EN60598-1 and part 2-5. IP Rating IP65. Insulation class I.

PRODUCT CODE: T4188ELW10

FEATURES

- Article Code: **T4188ELW10**
- Colour: **Anthracite gray**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 15.6**
- Width: **cm 18**
- Height: **cm 38.7**
- Impact Resistance: **IK06**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **38W**
- Color temperature (K): **3000K**
- CRI: **80**