


Cata Track Tunable White

Carlotta de Bevilacqua



IP20  Dimmerable: -

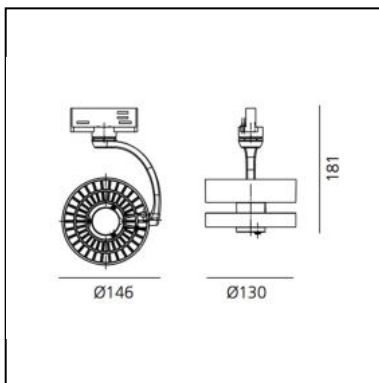

LUMINAIRE

- Watt: **23W**
- Delivered lumens output: **404lm**
- CCT: **2900K**
- Efficiency: **30%**
- Efficacy: **17.55lm/W**
- CRI: **90**
- Dimmable Typology: **Dali**

Notes

If there is no DALI-SwitchDim bus, the luminaire can be dimmed using the button on the device

DESCRIPTION

Interchangeable optical unit through a 'twist & lock' mechanism. Defined, concentrated light beams thanks to an innovative collimation system. Excellent quality of light: Cata Tuneable White: adjustable colour temperature from 2700K to 5700K CRI >93 (min.) Cata Stable White: available as warm white (3000K) and neutral white (4000K) – CRI=80 (min.). Rotation of 360°, tilt angle of +90°/-90° 2 installation options: with adaptor for 3-circuit track, or base plate for ceiling mounting. Ultra-flat power source (8mm height): DALI dimmable as standard, DALI8 interface hub for Tuneable White version. Materials : optic in transparent and metallic polycarbonate, heat sink in die-cast gloss aluminium, feeder/power supply in transparent polycarbonate, arm in die-cast gloss aluminium. Complies with standard EN60598-

PRODUCT CODE: M057783

FEATURES

- Article Code: **M057783**
- Colour: **Polished aluminium**
- Installation: **Track**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- design by: **Carlotta de Bevilacqua**

DIMENSIONS

- Height: **cm 18.1**
- Diameter: **cm 13**
- Base Diameter: **cm 13**
- Inclination: **-90+90**
- Rotation: **360°**
- Weight: **kg 0.7**
- Glow Wire Test: **850°**

SOURCES INCLUDED

- Category: **Led TW**
- Number: **1**
- Watt: **22W**
- Color temperature (K): **2700-5700**
- CRI: **>93 (min.)**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L70 (6K) 50000h**

Accessories



Optical unit 2x12° M057600



Optical unit 2x6° M057500




Optical wide 64° M057800

Cata Suspension Tunable White

Carlotta de Bevilacqua



IP20  Dimmerable: -

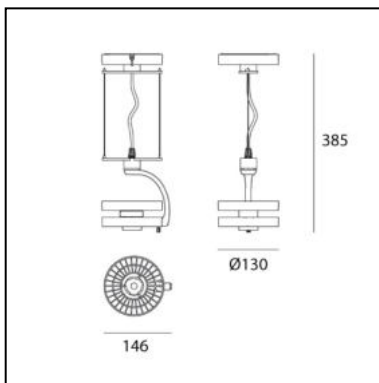

LUMINAIRE

- Watt: **23W**
- Delivered lumens output: **404lm**
- CCT: **2900K**
- Efficiency: **30%**
- Efficacy: **17.55lm/W**
- CRI: **90**
- Dimmable Typology: **Dali**

Notes

If there is no DALI-SwitchDim bus, the luminaire can be dimmed using the button on the device

DESCRIPTION

Interchangeable optical unit through a 'twist & lock' mechanism. Defined, concentrated light beams thanks to an innovative collimation system. Excellent quality of light: Cata Tuneable White: adjustable colour temperature from 2700K to 5700K CRI >93 (min.) Cata Stable White: available as warm white (3000K) and neutral white (4000K) – CRI=80 (min.). Rotation of 360°, tilt angle of +90°/-90° 2 installation options: with adaptor for 3-circuit track, or base plate for ceiling mounting. Ultra-flat power source (8mm height): DALI dimmable as standard, DALI8 interface hub for Tuneable White version. Materials : optic in transparent and metallic polycarbonate, heat sink in die-cast gloss aluminium, feeder/power supply in transparent polycarbonate, arm in die-cast gloss aluminium. Complies with standard EN60598-

PRODUCT CODE: M066981

FEATURES

- Article Code: **M066981**
- Colour: **Polished aluminium**
- Installation: **Suspension**
- Series: **Architectural Indoor**
- Environment: **Indoor**
- design by: **Carlotta de Bevilacqua**

DIMENSIONS

- Height: **cm 3.9**
- Diameter: **cm 1.3**
- Base Diameter: **cm 13**
- Inclination: **-90+90**
- Rotation: **360°**
- Weight: **kg 0.8**
- Glow Wire Test: **850°**

SOURCES INCLUDED

- Category: **Led TW**
- Number: **1**
- Watt: **22W**
- Color temperature (K): **2700-5700**
- CRI: **>93 (min.)**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L70 (6K) 50000h**

Accessories



Optical unit 2x6° M057500



Optical unit 2x12° M057600



Optical wide 64° M057800