

Cariddi 40 - 10° 3000K

Ernesto Gismondi



IP65 

LUMINAIRE

- Watt: **40W**
- Voltage: **220V-240 V**
- Delivered lumens output: **339lm**
- CCT: **3000K**
- Efficiency: **9%**
- Efficacy: **8.49lm/W**
- CRI: **90**

DESCRIPTION

Monochromatic LED projector. Floor, wall, ceiling, eaves installation. Consists of an adjustable lighting unit and terminal board. Rotation on the base +/-180°, body tilting +/-130. Positioning is maintained by means of locking dowels. The base and the lighting unit are connected by a H05RN-F cable. EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets. Electronic ballast integrated in the body. Silicone-sealed silk-screened tempered glass. Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12mm diameter cables. LED COB with PMMA lens and anodized aluminium reflector in 2 different beam versions. Available in 3 different powers. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the light fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP65 Insulation class I

PRODUCT CODE: T418710W00

FEATURES

- Article Code: **T418710W00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass, methacrylate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 25.6**
- Width: **cm 16.2**
- Height: **cm 26**
- Diameter: **cm 13.7**
- Impact Resistance: **IK07**
- Glow Wire Test: **750°**


SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **41W**
- Color temperature (K): **3000K**
- CRI: **80**

Cariddi 40 - 20° 3000K

Ernesto Gismondi



IP65 

LUMINAIRE

- Watt: **40W**
- Voltage: **220V-240 V**
- Delivered lumens output: **2214lm**
- CCT: **3000K**
- Efficiency: **56%**
- Efficacy: **55.35lm/W**
- CRI: **90**

DESCRIPTION

Monochromatic LED projector. Floor, wall, ceiling, eaves installation. Consists of an adjustable lighting unit and terminal board. Rotation on the base +/-180°, body tilting +/-130. Positioning is maintained by means of locking dowels. The base and the lighting unit are connected by a H05RN-F cable. EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets. Electronic ballast integrated in the body. Silicone-sealed silk-screened tempered glass. Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12mm diameter cables. LED COB with PMMA lens and anodized aluminium reflector in 2 different beam versions. Available in 3 different powers. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the light fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP65 Insulation class I

PRODUCT CODE: T418720W00

FEATURES

- Article Code: **T418720W00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass, methacrylate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 25.6**
- Width: **cm 16.2**
- Height: **cm 26**
- Diameter: **cm 13.7**
- Impact Resistance: **IK07**
- Glow Wire Test: **750°**


SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **41W**
- Color temperature (K): **3000K**
- CRI: **80**

Cariddi 40 - 40° 3000K

Ernesto Gismondi



IP65 

LUMINAIRE

- Watt: **40W**
- Voltage: **220V-240 V**
- Delivered lumens output: **2293lm**
- CCT: **3000K**
- Efficiency: **60%**
- Efficacy: **57.33lm/W**
- CRI: **90**

DESCRIPTION

Monochromatic LED projector. Floor, wall, ceiling, eaves installation. Consists of an adjustable lighting unit and terminal board. Rotation on the base +/-180°, body tilting +/-130. Positioning is maintained by means of locking dowels. The base and the lighting unit are connected by a H05RN-F cable. EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets. Electronic ballast integrated in the body. Silicone-sealed silk-screened tempered glass. Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12mm diameter cables. LED COB with PMMA lens and anodized aluminium reflector in 2 different beam versions. Available in 3 different powers. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the light fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP65 Insulation class I

PRODUCT CODE: T418740W00

FEATURES

- Article Code: **T418740W00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass, methacrylate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 25.6**
- Width: **cm 16.2**
- Height: **cm 26**
- Diameter: **cm 13.7**
- Impact Resistance: **IK07**
- Glow Wire Test: **750°**


SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **41W**
- Color temperature (K): **3000K**
- CRI: **80**

Cariddi 30 - 12° 3000K

Ernesto Gismondi



IP65 

LUMINAIRE

- Watt: **27W**
- Voltage: **220V-240 V**
- Delivered lumens output: **246lm**
- CCT: **3000K**
- Efficiency: **8%**
- Efficacy: **9.11lm/W**
- CRI: **90**

DESCRIPTION

Monochromatic LED projector. Floor, wall, ceiling, eaves installation. Consists of an adjustable lighting unit and terminal board. Rotation on the base +/-180°, body tilting +/-130. Positioning is maintained by means of locking dowels. The base and the lighting unit are connected by a H05RN-F cable. EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets. Electronic ballast integrated in the body. Silicone-sealed silk-screened tempered glass. Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12mm diameter cables. LED COB with PMMA lens and anodized aluminium reflector in 2 different beam versions. Available in 3 different powers. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the light fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP65 Insulation class I

PRODUCT CODE: T418610W00

FEATURES

- Article Code: **T418610W00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass, methacrylate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS


- Length: **cm 25.6**
- Width: **cm 16.2**
- Height: **cm 26**
- Diameter: **cm 13.7**
- Impact Resistance: **IK07**
- Glow Wire Test: **750°**


SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **28W**
- Color temperature (K): **3000K**

Cariddi 30 - 16° 3000K

Ernesto Gismondi

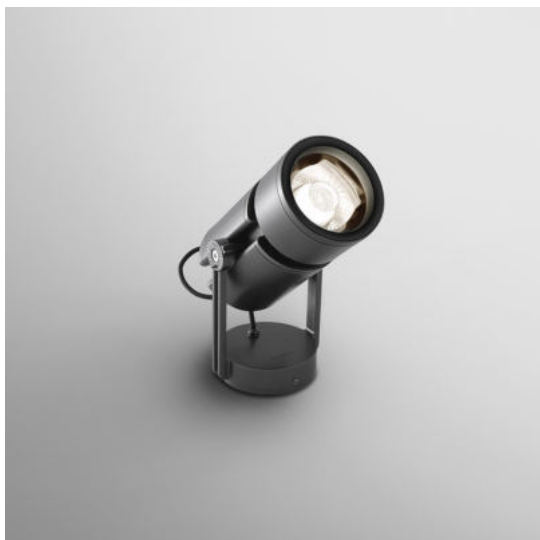

IP65 

LUMINAIRE

- Watt: **27W**
- Voltage: **220V-240 V**
- Delivered lumens output: **1895lm**
- CCT: **3000K**
- Efficiency: **64%**
- Efficacy: **70.19lm/W**
- CRI: **90**

DESCRIPTION

Monochromatic LED projector. Floor, wall, ceiling, eaves installation. Consists of an adjustable lighting unit and terminal board. Rotation on the base +/-180°, body tilting +/-130. Positioning is maintained by means of locking dowels. The base and the lighting unit are connected by a H05RN-F cable. EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets. Electronic ballast integrated in the body. Silicone-sealed silk-screened tempered glass. Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12mm diameter cables. LED COB with PMMA lens and anodized aluminium reflector in 2 different beam versions. Available in 3 different powers. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the light fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP65 Insulation class I

PRODUCT CODE: T418620W00

FEATURES

- Article Code: **T418620W00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass, methacrylate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 25.6**
- Width: **cm 16.2**
- Height: **cm 26**
- Diameter: **cm 13.7**
- Impact Resistance: **IK07**
- Glow Wire Test: **750°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **28W**
- Color temperature (K): **3000K**

Cariddi 30 - 35° 3000K

Ernesto Gismondi



IP65 

LUMINAIRE

- Watt: **27W**
- Voltage: **220V-240 V**
- Delivered lumens output: **1699lm**
- CCT: **3000K**
- Efficiency: **57%**
- Efficacy: **62.93lm/W**
- CRI: **90**

DESCRIPTION

Monochromatic LED projector. Floor, wall, ceiling, eaves installation. Consists of an adjustable lighting unit and terminal board. Rotation on the base +/-180°, body tilting +/-130. Positioning is maintained by means of locking dowels. The base and the lighting unit are connected by a H05RN-F cable. EN AB47100 aluminium head and terminal board, EN AW6060 aluminium body, silicone gaskets. Electronic ballast integrated in the body. Silicone-sealed silk-screened tempered glass. Wiring to be performed inside the terminal board by piercing an IP65 grommet suitable for 8-12mm diameter cables. LED COB with PMMA lens and anodized aluminium reflector in 2 different beam versions. Available in 3 different powers. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the light fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP65 Insulation class I

PRODUCT CODE: T418640W00

FEATURES

- Article Code: **T418640W00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, tempered glass, methacrylate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 25.6**
- Width: **cm 16.2**
- Height: **cm 26**
- Diameter: **cm 13.7**
- Impact Resistance: **IK07**
- Glow Wire Test: **750°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **28W**
- Color temperature (K): **3000K**