

Chocolate Suspension LED - 63 W 3000 K Undimmable - Moka


a.g Licht



DESCRIPTION

IP20  

PRODUCT CODE: M113610

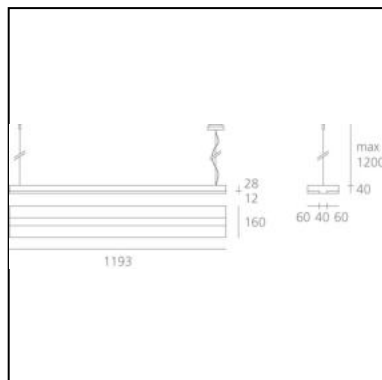

FEATURES

- Article Code: **M113610**
- Colour: **Moka**
- Installation: **Suspension**
- Material: **Painted Aluminum**
- Series: **Architectural Indoor**
- Area contract: **Hospitality, Office**
- design by: **a.g Licht**

DIMENSIONS

- Length: **cm 114**
- Width: **cm 16**
- Height: **cm 4**
- Max Height from ceiling: **cm 120**
- Weight: **kg 4.6**
- Glow Wire Test: **850°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **55W**
- Delivered lumens output: **8230lm**
- Color temperature (K): **3000K**
- CRI: **=80 (min.)**
- Color Tolerance: **MacAdam 4SDCM**
- Efficacy: **150lm/W**
- Service Life: **L70(6K)>50.000h**

LUMINAIRE

- Power Supply: **on/off**
- Watt: **55W**
- Voltage: **220V-240V**
- Delivered lumens output: **3539lm**
- CCT: **3000K**
- Efficiency: **46%**
- Efficacy: **64.34lm/W**
- CRI: **80**

Notes

Chocolate Suspension LED - 63 W 4000 K Undimmable - White

a.g Licht



DESCRIPTION

Single pendant light with direct-indirect lighting using Led. Aluminium body. 2 colours: moka and white. Optics made of transparent polycarbonate fitted with a prismoptic diffuser. Electronic control gear, or Dali-SwitchDim dimmable electronic control gear. Emergency lighting on request. Polycarbonate dust protection cover. Quick adjustment steel suspension cables. Complies with standard EN60598-1 and other specific standards.

IP20  

PRODUCT CODE: M113720

FEATURES


- Article Code: **M113720**
- Colour: **White**
- Installation: **Suspension**
- Material: **Painted Aluminum**
- Series: **Architectural Indoor**
- Area contract: **Hospitality, Office**
- design by: **a.g Licht**

DIMENSIONS

- Length: **cm 114**
- Width: **cm 16**
- Height: **cm 4**
- Max Height from ceiling: **cm 120**
- Weight: **kg 4.6**
- Glow Wire Test: **850°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **55W**
- Delivered lumens output: **8800lm**
- Color temperature (K): **4000K**
- CRI: **=80 (min.)**
- Color Tolerance: **MacAdam 4SDCM**
- Efficacy: **160lm/W**
- Service Life: **L70(6K)>50.000h**

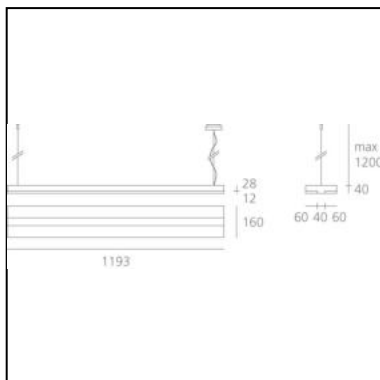

LUMINAIRE

- Power Supply: **on/off**
- Watt: **55W**
- Voltage: **220V-240V**
- Delivered lumens output: **3728lm**
- CCT: **4000K**
- Efficiency: **46%**
- Efficacy: **67.79lm/W**
- CRI: **80**

Chocolate Suspension LED - 63 W 3000 K Dimmable Dali - Moka

a.g Licht




DESCRIPTION

Single pendant light with direct-indirect lighting using Led. Aluminium body. 2 colours: moka and white. Optics made of transparent polycarbonate fitted with a prismatic diffuser. Electronic control gear, or Dali-SwitchDim dimmable electronic control gear. Emergency lighting on request. Polycarbonate dust protection cover. Quick adjustment steel suspension cables. Complies with standard EN60598-1 and other specific standards.

IP20   Dimmerable: 

PRODUCT CODE: M113611

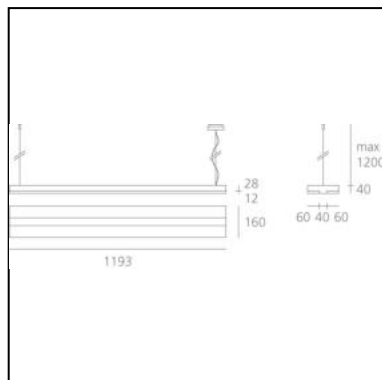

FEATURES

- Article Code: **M113611**
- Colour: **Moka**
- Installation: **Suspension**
- Material: **Painted Aluminium**
- Series: **Architectural Indoor**
- Area contract: **Hospitality, Office**
- design by: **a.g Licht**

DIMENSIONS

- Length: **cm 114**
- Width: **cm 16**
- Height: **cm 4**
- Max Height from ceiling: **cm 120**
- Weight: **kg 4.6**
- Glow Wire Test: **850°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **55W**
- Delivered lumens output: **8230lm**
- Color temperature (K): **3000K**
- CRI: **=80 (min.)**
- Color Tolerance: **MacAdam 4SDCM**
- Efficacy: **150lm/W**
- Service Life: **L70(6K)>50.000h**

LUMINAIRE

- Power Supply: **Electronic Dimmable Dali Integrated**
- Watt: **55W**
- Voltage: **220V-240V**
- Delivered lumens output: **3539lm**
- CCT: **3000K**
- Efficiency: **46%**
- Efficacy: **64.34lm/W**
- CRI: **80**
- Dimmable Typology: **Dali**

Chocolate Suspension LED - 63 W 4000 K Dimmable Dali - White

a.g Licht



DESCRIPTION

Single pendant light with direct-indirect lighting using Led. Aluminium body. 2 colours: moka and white. Optics made of transparent polycarbonate fitted with a prismatic diffuser. Electronic control gear, or Dali-SwitchDim dimmable electronic control gear. Emergency lighting on request. Polycarbonate dust protection cover. Quick adjustment steel suspension cables. Complies with standard EN60598-1 and other specific standards.

IP20   Dimmerable: 

PRODUCT CODE: M113721

FEATURES


- Article Code: **M113721**
- Colour: **White**
- Installation: **Suspension**
- Material: **Painted Aluminium**
- Series: **Architectural Indoor**
- Area contract: **Hospitality, Office**
- design by: **a.g Licht**

DIMENSIONS

- Length: **cm 114**
- Width: **cm 16**
- Height: **cm 4**
- Max Height from ceiling: **cm 120**
- Weight: **kg 4.6**
- Glow Wire Test: **850°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **55W**
- Delivered lumens output: **8800lm**
- Color temperature (K): **4000K**
- CRI: **=80 (min.)**
- Color Tolerance: **MacAdam 4SDCM**
- Efficacy: **160lm/W**
- Service Life: **L70(6K)>50.000h**

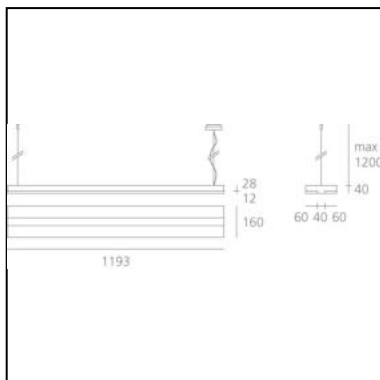

LUMINAIRE

- Power Supply: **Electronic Dimmable Dali Integrated**
- Watt: **55W**
- Voltage: **220V-240V**
- Delivered lumens output: **3728lm**
- CCT: **4000K**
- Efficiency: **46%**
- Efficacy: **67.79lm/W**
- CRI: **80**
- Dimmable Typology: **Dali**