



Dioscuri wall/ceiling 35

Michele De Lucchi

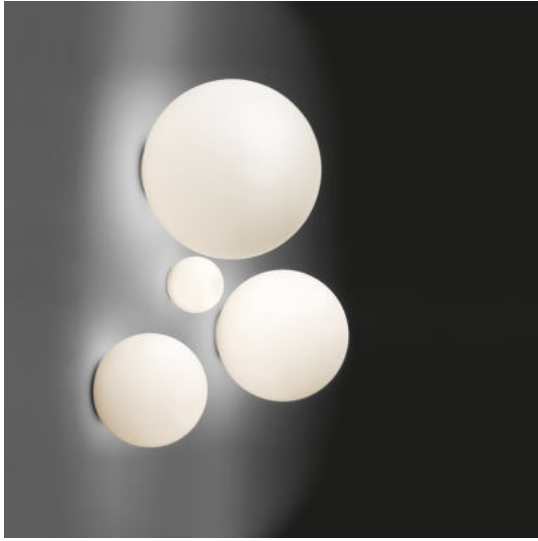

IP65     Dimmerable: 

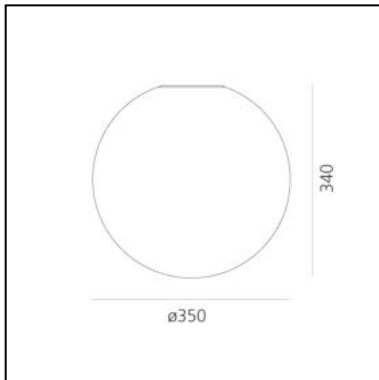

LUMINAIRE

- Watt: **21W**
- Voltage: **220V-240V**
- Delivered lumens output: **2186lm**
- Efficiency: **89%**
- Efficacy: **104.07lm/W**
- CRI: **80**

Notes

Lamp not included. The IP 65 degree of protection makes it also suitable for outdoor application.

DESCRIPTION

Materials: Thermoplastic resin ceiling support; acid-etched blown glass diffuser. IP65 rating makes it suitable also for outdoor use. (Only for 25, 35, 42 versions).

PRODUCT CODE: 0116010A

FEATURES

- Article Code: **0116010A**
- Colour: **White**
- Installation: **CeilingWall**
- Material: **Blown glass, polycarbonate**
- Series: **Design Collection, Architectural Outdoor**
- Area contract: **Hospitality, null, Residential**
- Emission: **Diffused**
- design by: **Michele De Lucchi**

DIMENSIONS


- Height: **cm 34**
- Diameter: **cm 35**
- Impact Resistance: **N.D.**
- Glow Wire Test: **850°**

SOURCES NOT INCLUDED


- Category: **LED RETROFIT**
- Number: **1**
- Socket: **E27**

Dioscuri wall/ceiling 42

Michele De Lucchi

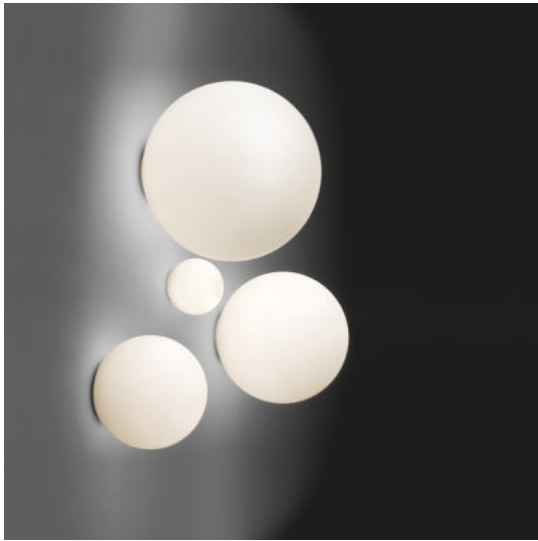

IP65     Dimmerable: 

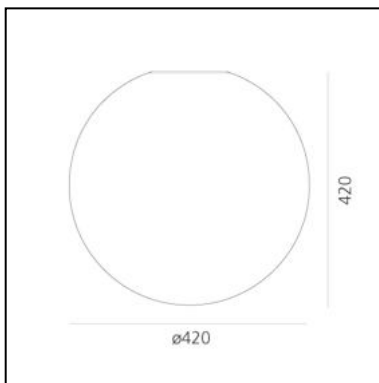

LUMINAIRE

- Watt: **21W**
- Voltage: **220V-240V**
- Delivered lumens output: **2186lm**
- Efficiency: **89%**
- Efficacy: **104.07lm/W**
- CRI: **80**

Notes

Lamp not included. The IP 65 degree of protection makes it also suitable for outdoor application.

DESCRIPTION

Materials: Thermoplastic resin ceiling support; acid-etched blown glass diffuser. IP65 rating makes it suitable also for outdoor use. (Only for 25, 35, 42 versions).

PRODUCT CODE: 0117010A

FEATURES

- Article Code: **0117010A**
- Colour: **White**
- Installation: **CeilingWall**
- Material: **Blown glass, polycarbonate**
- Series: **Design Collection, Architectural Outdoor**
- Area contract: **Hospitality, null, Residential**
- Emission: **Diffused**
- design by: **Michele De Lucchi**

DIMENSIONS


- Height: **cm 42**
- Diameter: **cm 42**
- Impact Resistance: **N.D.**
- Glow Wire Test: **850°**

SOURCES NOT INCLUDED


- Category: **LED RETROFIT**
- Number: **1**
- Socket: **E27**

Dioscuri wall/ceiling 14 (E14)

Michele De Lucchi

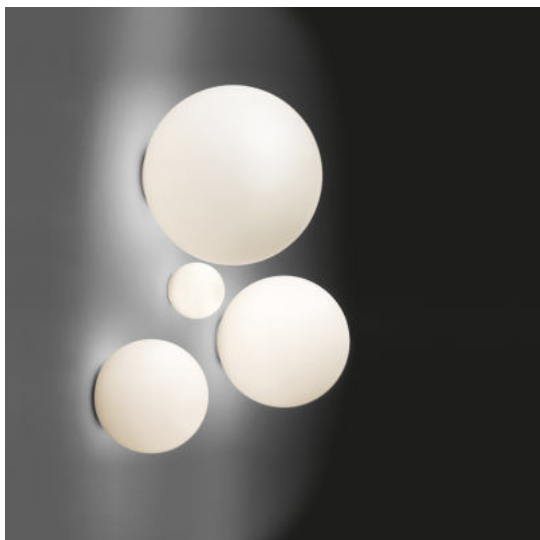

IP44     Dimmerable: +  -

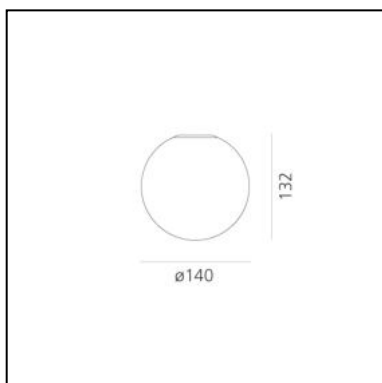

LUMINAIRE

- Watt: **5W**
- Voltage: **220V-240V**
- Delivered lumens output: **353lm**
- Efficiency: **75%**
- Efficacy: **70.58lm/W**
- CRI: **80**

Notes

DESCRIPTION

Materials: Thermoplastic resin ceiling support; acid-etched blown glass diffuser. IP65 rating makes it suitable also for outdoor use. (Only for 25, 35, 42 versions).

PRODUCT CODE: 1039110A

FEATURES

- Article Code: **1039110A**
- Colour: **White**
- Installation: **WallCeiling**
- Material: **Blown glass, polycarbonate**
- Series: **Design Collection, Architectural Outdoor**
- Area contract: **Hospitality, null, Residential**
- Emission: **Diffused**
- design by: **Michele De Lucchi**

DIMENSIONS


- Height: **cm 13.2**
- Diameter: **cm 14**

SOURCES NOT INCLUDED


- Category: **LED RETROFIT**
- Number: **1**
- Socket: **E14**

Dioscuri wall/ceiling 25

Michele De Lucchi

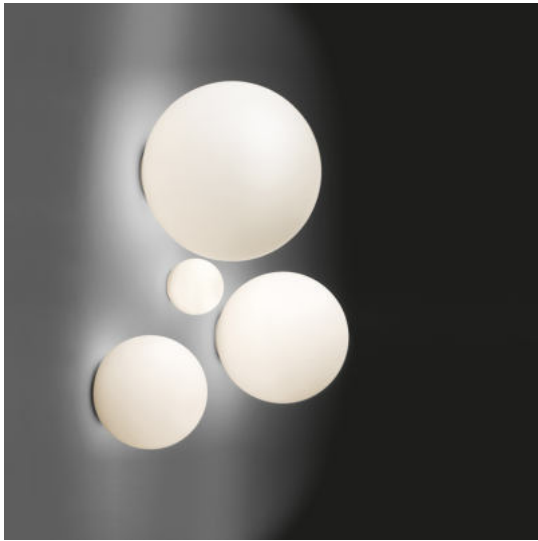

IP65       Dimmerable: 

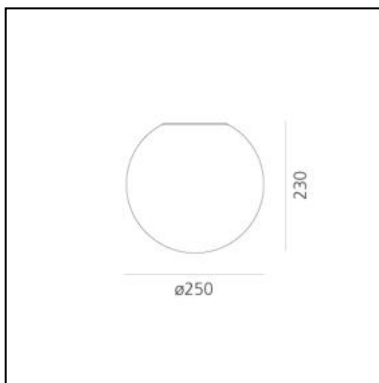

LUMINAIRE

- Watt: **13W**
- Voltage: **220V-240V**
- Delivered lumens output: **1356lm**
- Efficiency: **89%**
- Efficacy: **104.28lm/W**
- CRI: **80**

Notes

Lamp not included. The IP 65 degree of protection makes it also suitable for outdoor application.

DESCRIPTION

Materials: Thermoplastic resin ceiling support; acid-etched blown glass diffuser. IP65 rating makes it suitable also for outdoor use. (Only for 25, 35, 42 versions).

PRODUCT CODE: 0112010A

FEATURES

- Article Code: **0112010A**
- Colour: **White**
- Installation: **WallCeiling**
- Material: **Blown glass, polycarbonate**
- Series: **Design Collection, Architectural Outdoor**
- Area contract: **Hospitality, null, Residential**
- Emission: **Diffused**
- design by: **Michele De Lucchi**

DIMENSIONS

- Height: **cm 23**
- Diameter: **cm 25**
- Impact Resistance: **N.D.**
- Glow Wire Test: **850°**

SOURCES NOT INCLUDED

- Category: **LED RETROFIT**
- Number: **1**
- Socket: **E27**