


Minispot 25° 3000K

Studio Artemide



IP65  

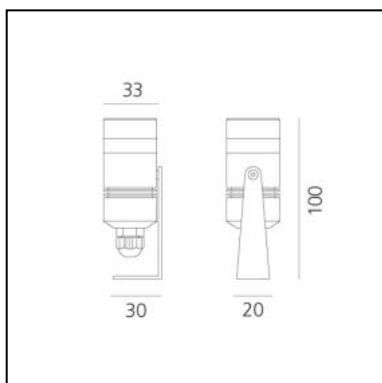

LUMINAIRE

- Watt: **2W**
- Delivered lumens output: **100lm**
- CCT: **3000K**
- Efficiency: **71%**
- Efficacy: **49.77lm/W**
- CRI: **80**

Notes

Fixed optic. PMMA lenses. Beams (10°).
White monochromatic LEDs available
Colour temperatures:
Warm = 3000K

DESCRIPTION

Light fixture with high-performance LED light sources.
Ground, floor, wall installation.
Composed by body, metal ring, diffuser in transparent polycarbonate.
Body and metal ring in computer numerical control machined billet anticorrosional aluminium.
Painted spot with 2-stage outdoor treatment: primer, outdoor paint.
Silicone gaskets.
100cm-long two-pole connection cable H05RN-F.
Picket for ground installation in galvanized sheet iron.
Technical features of light fixtures in compliance with EN60598-1 and part 2-13.

PRODUCT CODE: NL702910K0

FEATURES

- Article Code: **NL702910K0**
- Colour: **Silver**
- Installation: **Projector**
- Series: **Architectural Outdoor**
- Area contract: **null, Outdoor**
- design by: **Studio Artemide**

DIMENSIONS

- Width: **cm 2**
- Height: **cm 10**
- Diameter: **cm 3**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **3 W**
- Color temperature (K): **3000K**
- LED current: **700 mA**

Accessories

NO
IMAGE
AVAILABLE

EGO PICCHETTO NL97150

NO
IMAGE
AVAILABLE

Driver 14W - 700mA 220-240 - 79x38x25 (LxWxH) -
IP67 - Undimable DV3003

NO
IMAGE
AVAILABLE

Driver 30W - 700mA 220-240 - 120x38x25
(LxWxH) - IP67 - Non Dimmerabile DV3004

NO
IMAGE
AVAILABLE


Driver 38W - 220-240 - 185x35x33 (LxWxH) - IP67 -
Dimmable DALI DV1042

Minispot 32° 3000K

Studio Artemide



IP65  

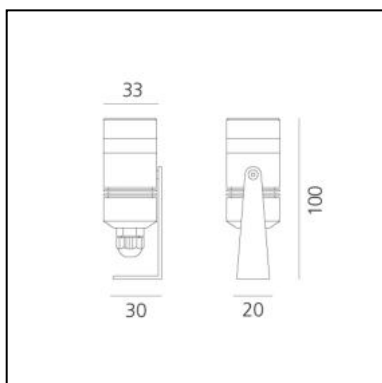

LUMINAIRE

- Watt: **2W**
- Delivered lumens output: **95lm**
- CCT: **3000K**
- Efficiency: **68%**
- Efficacy: **47.67lm/W**
- CRI: **80**

Notes

Fixed optic. PMMA lenses. Beams (25°).
White monochromatic LEDs available
Colour temperatures:
Warm = 3000K

Neutral = 4000K

DESCRIPTION

Light fixture with high-performance LED light sources.
Ground, floor, wall installation.

Composed by body, metal ring, diffuser in transparent polycarbonate.

Body and metal ring in computer numerical control machined billet anticorrosional aluminium.

Painted spot with 2-stage outdoor treatment:
primer, outdoor paint.

Silicone gaskets.

100cm-long two-pole connection cable H05RN-F.

Picket for ground installation in galvanized sheet iron.

Technical features of light fixtures in compliance with EN60598-1 and part 2-13.

PRODUCT CODE: NL702925K0

FEATURES

- Article Code: **NL702925K0**
- Colour: **Silver**
- Installation: **Projector**
- Series: **Architectural Outdoor**
- Area contract: **null, Outdoor**
- design by: **Studio Artemide**

DIMENSIONS

- Width: **cm 2**
- Height: **cm 10**
- Diameter: **cm 3**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **3 W**
- Color temperature (K): **3000K**
- LED current: **700 mA**

Accessories

NO
IMAGE
AVAILABLE

EGO PICCHETTO NL97150

NO
IMAGE
AVAILABLE

Driver 14W - 700mA 220-240 - 79x38x25 (LxWxH) -
IP67 - Undimable DV3003

NO
IMAGE
AVAILABLE

Driver 30W - 700mA 220-240 - 120x38x25
(LxWxH) - IP67 - Non Dimmerabile DV3004

NO
IMAGE
AVAILABLE


Driver 38W - 220-240 - 185x35x33 (LxWxH) - IP67 -
Dimmable DALI DV1042

Minispot 45° 3000K

Studio Artemide



IP65  

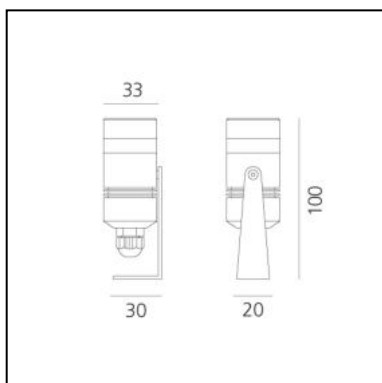

LUMINAIRE

- Watt: **2W**
- Delivered lumens output: **91lm**
- CCT: **3000K**
- Efficiency: **65%**
- Efficacy: **45.57lm/W**
- CRI: **80**

Notes

Fixed optic. PMMA lenses. Beams (40°). White monochromatic LEDs available Colour temperatures: Warm = 3000K Neutral = 4000K

DESCRIPTION

Light fixture with high-performance LED light sources. Ground, floor, wall installation. Composed by body, metal ring, diffuser in transparent polycarbonate. Body and metal ring in computer numerical control machined billet anticorrosion aluminium. Painted spot with 2-stage outdoor treatment: primer, outdoor paint. Silicone gaskets. 100cm-long two-pole connection cable H05RN-F. Picket for ground installation in galvanized sheet iron. Technical features of light fixtures in compliance with EN60598-1 and part 2-13.

PRODUCT CODE: NL7029ELK0

FEATURES

- Article Code: **NL7029ELK0**
- Colour: **Silver**
- Installation: **Projector**
- Series: **Architectural Outdoor**
- Area contract: **null, Outdoor**
- design by: **Studio Artemide**

DIMENSIONS

- Width: **cm 2**
- Height: **cm 10**
- Diameter: **cm 3**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **3 W**
- Color temperature (K): **3000K**
- LED current: **700 mA**

Accessories

NO
IMAGE
AVAILABLE

EGO PICCHETTO NL97150

NO
IMAGE
AVAILABLE

Driver 14W - 700mA 220-240 - 79x38x25 (LxWxH) -
IP67 - Undimable DV3003

NO
IMAGE
AVAILABLE

Driver 30W - 700mA 220-240 - 120x38x25
(LxWxH) - IP67 - Non Dimmerabile DV3004

NO
IMAGE
AVAILABLE

Driver 38W - 220-240 - 185x35x33 (LxWxH) - IP67 -
Dimmable DALI DV1042