


# Sostituto Spot 9°

Ernesto Gismondi



IP65 

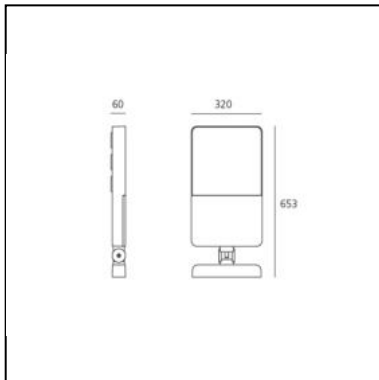

## LUMINAIRE

- Watt: **106W**
- Voltage: **220V-240V**
- Delivered lumens output: **9183lm**
- CCT: **3000K**
- Efficiency: **76%**
- Efficacy: **86.63lm/W**
- CRI: **80**

## DESCRIPTION

Light fixture with direct emission, with monochromatic LED light sources. Floor, wall, eaves installation. Consists of lighting unit, wiring terminal board and fixing plate. Rotation on the base +/-10°, body tilting +/-90. Positioning is maintained by means of locking dowels. EN AB47100 aluminium body and terminal board, silicone gaskets. Electronic ballast integrated in the body. Polycarbonate diffuser silicone-sealed to the lens supporting unit. Composed by 3 interchangeable optical units. IP67 connector for the electrical connection to the mains, which can be located in the base compartment and is suitable for 5-13.5mm diameter cables. LED circuits with PMMA lenses in 3 beam versions: 5°, 11,5° and elliptical 12x20°. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the lighting fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP66. Protection level from 4KV impulse overvoltage. Insulation class II. CE certification.

**PRODUCT CODE: T418410W00**

## FEATURES

- Article Code: **T418410W00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, polycarbonate, methacrilate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

## DIMENSIONS

- Length: **cm 32**
- Width: **cm 6**
- Height: **cm 65.3**
- Impact Resistance: **IK10**
- Glow Wire Test: **750°**

## SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **106W**
- Color temperature (K): **3000K**
- CRI: **80**

# Sostituto Spot EL

Ernesto Gismondi



IP65 

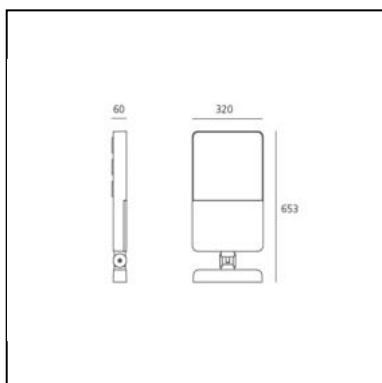

## LUMINAIRE

- Watt: **106W**
- Voltage: **220V-240V**
- Delivered lumens output: **8795lm**
- CCT: **3000K**
- Efficiency: **73%**
- Efficacy: **82.97lm/W**
- CRI: **80**

## DESCRIPTION

Light fixture with direct emission, with monochromatic LED light sources. Floor, wall, eaves installation. Consists of lighting unit, wiring terminal board and fixing plate. Rotation on the base  $\pm 10^\circ$ , body tilting  $\pm 90^\circ$ . Positioning is maintained by means of locking dowels. EN AB47100 aluminium body and terminal board, silicone gaskets. Electronic ballast integrated in the body. Polycarbonate diffuser silicone-sealed to the lens supporting unit. Composed by 3 interchangeable optical units. IP67 connector for the electrical connection to the mains, which can be located in the base compartment and is suitable for 5-13.5mm diameter cables. LED circuits with PMMA lenses in 3 beam versions:  $5^\circ$ ,  $11,5^\circ$  and elliptical  $12 \times 20^\circ$ . All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the lighting fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP66. Protection level from 4KV impulse overvoltage. Insulation class II.

**PRODUCT CODE: T4184ELW00**

## FEATURES

- Article Code: **T4184ELW00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, polycarbonate, methacrilate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

## DIMENSIONS

- Length: **cm 32**
- Width: **cm 6**
- Height: **cm 65.3**
- Impact Resistance: **IK10**
- Glow Wire Test: **750°**

## SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **106W**
- Color temperature (K): **3000K**
- CRI: **80**

# Sostituto Spot flood 24°

Ernesto Gismondi



IP65 

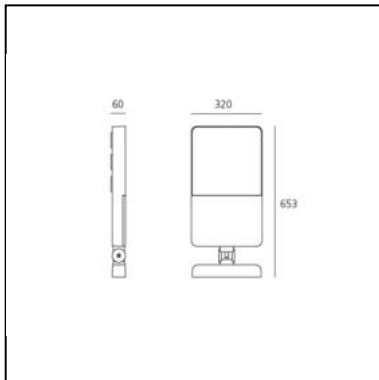

## LUMINAIRE

- Watt: **106W**
- Voltage: **220V-240V**
- Delivered lumens output: **9277lm**
- CCT: **3000K**
- Efficiency: **77%**
- Efficacy: **87.52lm/W**
- CRI: **80**

## DESCRIPTION

Light fixture with direct emission, with monochromatic LED light sources. Floor, wall, eaves installation. Consists of lighting unit, wiring terminal board and fixing plate. Rotation on the base  $\pm 10^\circ$ , body tilting  $\pm 90^\circ$ . Positioning is maintained by means of locking dowels. EN AB47100 aluminium body and terminal board, silicone gaskets. Electronic ballast integrated in the body. Polycarbonate diffuser silicone-sealed to the lens supporting unit. Composed by 3 interchangeable optical units. IP67 connector for the electrical connection to the mains, which can be located in the base compartment and is suitable for 5-13.5mm diameter cables. LED circuits with PMMA lenses in 3 beam versions:  $5^\circ$ ,  $11,5^\circ$  and elliptical  $12 \times 20^\circ$ . All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the lighting fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP66. Protection level from 4KV impulse overvoltage. Insulation class II.

**PRODUCT CODE: T418423W00**

## FEATURES

- Article Code: **T418423W00**
- Colour: **Grey antracite**
- Installation: **FloorWallCeiling**
- Material: **Aluminum, polycarbonate, methacrilate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

## DIMENSIONS

- Length: **cm 32**
- Width: **cm 6**
- Height: **cm 65.3**
- Impact Resistance: **IK10**
- Glow Wire Test: **750°**

## SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **106W**
- Color temperature (K): **3000K**
- CRI: **80**