


# Tetragono Wall - 3000K

Ernesto Gismondi



IP65 

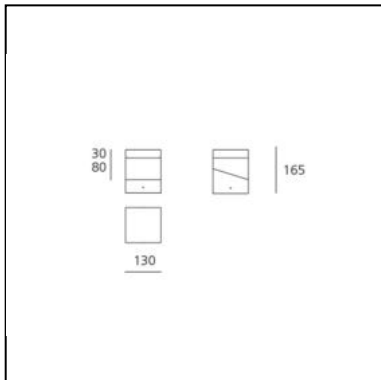

## LUMINAIRE

- Watt: **15W**
- Voltage: **220V-240V**
- Delivered lumens output: **481lm**
- CCT: **3000K**
- Efficiency: **34%**
- Efficacy: **32.07lm/W**
- CRI: **90**

## DESCRIPTION

Light fixture with radial light emission. Consists of body and wall fixing plate. Lamp support in extruded EN-AW-6060 aluminium, subjected to chromate treatment and painted, height 50 mm, with painted steel base flange, with holes for wall installation. Lighting unit in die-cast EN-AB 47100 aluminium painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Provided with metalized polycarbonate reflectors. UV resistant diffuser in shock resistant polycarbonate with bright finish. AISI 316 fixing screws and silicone gaskets. Provided with cable and IP67 connector for the connection to the mains suitable for 5-13.5mm diameter cables. IP Rating IP65. Insulation class I. Technical features in compliance with EN60598-1.

**PRODUCT CODE: T417300W00**

## FEATURES

- Article Code: **T417300W00**
- Colour: **Grey antracite**
- Installation: **Wall**
- Material: **Aluminum, polycarbonate**
- Series: **Architectural Outdoor**
- design by: **Ernesto Gismondi**

## DIMENSIONS

- Length: **cm 13**
- Width: **cm 13**
- Height: **cm 16.5**
- Impact Resistance: **IK10**
- Glow Wire Test: **650°**

## SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **15W**
- Delivered lumens output: **1375lm**
- Color temperature (K): **3000K**
- CRI: **80 typ**
- Color Tolerance: **2SDCM**
- Efficacy: **106lm/W**
- Service Life: **L70(6K)>36,300h**