

LASVIT Technical Sheet

DUNA COLLECTION

DESIGNER: Zaha Hadid

YEAR OF DESIGN: 2017

Glass: Hand blown glass

Its design concept is realized in a three dimensional, asymmetrical, pair of intersecting glass forms. The striated surface of the crystal glass produces ever-changing effects of reflection and refraction. Narrowly directed light sources beam light through the mass of glass into the entire glass element, highlighting its geometry.



PACKAGING

Duna

Size: 775 × 350 × 280 cm

Pallet: 12 pcs

Total weight: 18 kg

Duna wall sconce

Size: 280 × 200 × 780 cm

Pallet: 20 pcs

Total weight: 13 kg

LASVIT Technical Sheet

DUNA COLLECTION

TECHNICAL DETAILS DUNA PENDANT

Type	CE	UL
Light source	2 × LED module, 10W, 3000K Lm 1575 CRI 80 dimmable	
Input voltage	220 – 240 VAC/50 – 60Hz	120VAC/60Hz
Cord lenght	2000mm/78¾", longer cord is available, contact your sales person	
Cord color	transparent cabel, 2 stainless steel wire	
Rated power	20W	
Ballast	trailing edge	
Primary material	transparent anodized aluminium alloy	
Prot. rating	IP 20	
Safety class	CLASS I	

LASVIT Technical Sheet

DUNA COLLECTION

TECHNICAL DETAILS DUNA WALLSCONCE

Type	CE	UL
Light source	LED module, 10W, 3000K 1575 Lumens CRI 80	
Input voltage	220 – 240VAC/50 – 60Hz	120VAC/60Hz
Rated power	10W	
Ballast	trailing edge no dimmable	
Primary material	transparent anodized aluminium alloy	
Prot. rating	IP 20	
Safety class	CLASS I	



LASVIT Technical Sheet

DUNA COLLECTION

TECHNICAL DRAWING

Duna pendant

Duna wall sconce

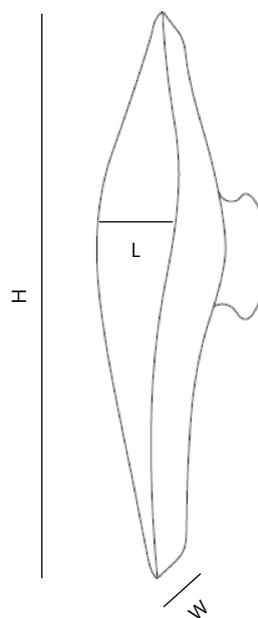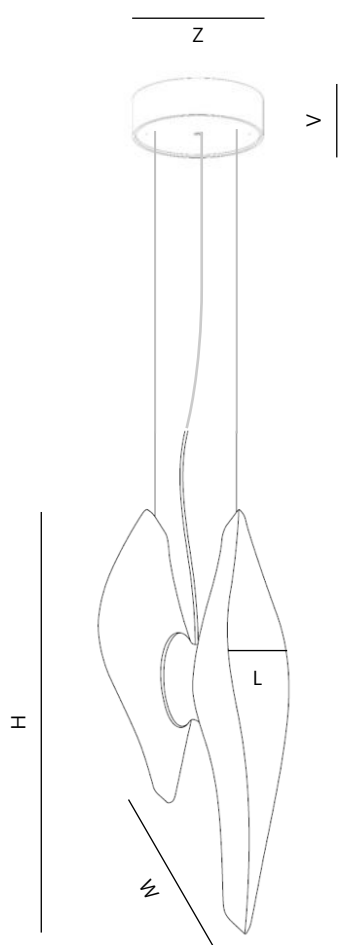

Name	W / L (mm/inch)	H / OH (mm/inch)	Z (mm/inch)	V (mm/inch)
Duna pendant	W 260/10¼" × L 205/8⅛"	H 625/24⅝" + L	204/8"	50/2"
Duna wall sconce	W 155/6⅞" × L 205/8⅛"	H 600/23⅝"	-	-

LASVIT Technical Sheet

Name	Glass color	Item ID – CE	Item ID – UL	Weight (approx.)
Duna pendant	clear	CL038PA-4CE00-0129S1	CL038PA-4UL00-0129S1	15kg/33lbs
Duna wall sconce	clear	CL038WA-4CE00-0129S1	CL038WA-4UL00-0129S1	5kg/11lbs

EACH LASVIT COLLECTION IS UNIQUE BECAUSE IT IS COMPLETELY HANDCRAFTED. TINY BUBBLES AND OTHER IRREGULARITIES MAY OCCUR DUE TO THE NATURE OF THE HIGH QUALITY GLASS-BLOWING TECHNIQUE