

CS 7101-1 FL
SmartLine element
with a dual wok burner



- Simple controls -single-handed operation via rotary dial control
- Elegant design – for flush or raised installation
- Seamlessly integrates with any SmartLine element
- Broad performance spectrum – dual wok with up to 4.500 kW kW of power
- Easy cleaning – dishwasher-safe ComfortClean pot rests

EAN: 4002516306245 / Material number: 11402720 / Old Material Number: 27710151GB

Heating type	
Heating type	Gas
Construction type	
SmartLine	•
Design	
Elegant glass ceramic surface	•
Flush	•
Ceramic surface colour	Black
Surface-mounted installation	•
Cooking zone details	
Number of cooking zones	1
1st cooking zone/cooking area	
Position	Centred
Type	Dual wok burner
Max. rating in W	4500
User convenience	
Operation via sensor controls	Knob
Operation via knobs	•
Electronic ignition with single-hand operation	•
Cleaning convenience	
Easy to clean ceramic glass	•
Dishwasher-proof pot rests	•
Safety	
GasStop	•
Technical data	
Dimensions in mm (width)	378
Dimensions in mm (height)	92
Casing height incl. connection box in mm	92
Dimensions in mm (depth)	520
Cutout dimensions in mm (width) with surface-mounted installation	358
Cutout dimensions in mm (depth) with surface-mounted installation	500
Internal cutout dimensions in mm (depth) with flush installation	500
Weight in kg	7
External cutout dimensions in mm (width) with flush installation	382
External cutout dimensions in mm (depth) with flush installation	524
Total rated load in kW	4.50
Internal cutout dimensions in mm (width) with flush installation	358
Length of supply lead in m	1.4
Voltage in V	230
Frequency in Hz	50-60
Accessories supplied	
CSFG 7000 FlameGuard	•
Number of mains cables with plug	Yes
Jets for natural gas	•
Jets for liquid gas	•

CS 7101-1 FL
SmartLine element
with a dual wok burner




EAN: 4002516306245 / Material number: 11402720 / Old Material Number: 27710151GB

Wok ring



CS 7101-1 FL
SmartLine element
with a dual wok burner

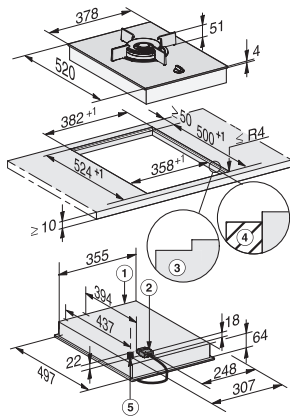

CS 7101 FL flush (installation drawing)

1) Front, 2) Mains connection box with mains connection cable, L = 2000 mm, 3) Stepped cut-out, 4) Wooden frame 12 mm (supplied loose), 5) Gas connection R 1/2 - ISO 7-1 (DIN EN 10226)