


CS 7641 FL
SmartLine element
with ?? PowerFlex cooking areas for maximum power output

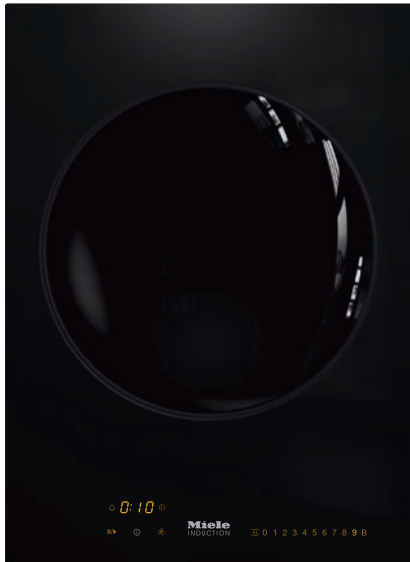

- Intuitive quick selection via number sequences – Smart Select
- Seamlessly integrates with any SmartLine element
- Elegant design – for flush or raised installation
- Eye-catcher – with integrated wok
- Powerful – booster function

EAN: 4002516276210 / Material number: 11323040 / Old Material Number: 27764150GB

Heating type	
Heating type	Induction
Construction type	
SmartLine	•
Design	
Elegant glass ceramic surface	•
Flush	•
Ceramic surface colour	Black
Surface-mounted installation	•
Appliance networking	•
Cooking zone details	
Number of cooking zones	1
1st cooking zone/cooking area	
Position	Centred
Type	Wok burner
Max. rating in W	2500
Max. Booster power rating in W	3000
6th cooking zone/cooking area	
Wok recess	Wok recess
User convenience	
Pan and pan size recognition	•
Display colour	Yellow
Operation via sensor controls	Smart Select
Auto heat-up	•
Permanent pan recognition	•
Recall function	•
Individual setting options (e.g. buzzers)	•
Stop & Go function	•
Minute minder	•
Keeping warm	•
Cleaning convenience	
Easy to clean ceramic glass	•
Wipe protection	•
Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	378
Dimensions in mm (height)	134
Casing height incl. connection box in mm	129
Dimensions in mm (depth)	520
Cutout dimensions in mm (width) with surface-mounted installation	358
Cutout dimensions in mm (depth) with surface-mounted installation	500
Internal cutout dimensions in mm (depth) with flush installation	500


CS 7641 FL
 SmartLine element
 with ?? PowerFlex cooking areas for maximum power output



EAN: 4002516276210 / Material number: 11323040 / Old Material Number: 27764150GB


Weight in kg	12
External cutout dimensions in mm (width) with flush installation	382
External cutout dimensions in mm (depth) with flush installation	524
Total rated load in kW	3.00
Internal cutout dimensions in mm (width) with flush installation	358
Length of supply lead in m	1.5
Voltage in V	220-240
Frequency in Hz	50-60
Accessories supplied	
Number of mains cables with plug	Yes
Uncoated wok pan	•

CS 7641 FL
 SmartLine element
 with ?? PowerFlex cooking areas for maximum power output

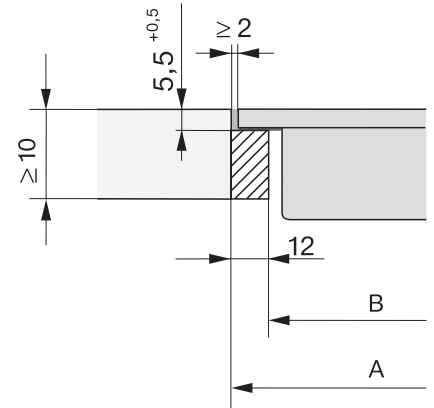

CS 7000 FL, flush (Installation drawing)
 *7+0,5 = CS7641 (Wok)

CS 7611 FL, flush (Installation drawing)
 1) Front, 2) Mains connection cable, L = 2000 mm, 3) Stepped cut-out, 4) Wooden frame 12 mm (supplied loose)

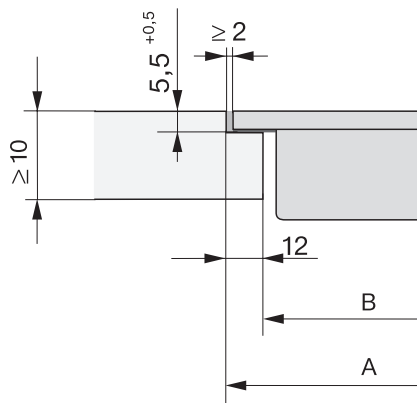

CS 7000 FL, flush (Installation drawing)
 *7+0,5 = CS7641 (Wok)

CS 7641 FL, onset (Installation drawing)
 1) Front, 2) Mains connection cable, L = 2000 mm