

DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



- Timeless design – 598 mm wide stainless steel cooker hood
- Powerful – 640 m³/h on the booster setting
- LED strip for uniform lighting
- Effective filtration – 10-ply aluminum metal grease filter
- Suitable for every home – for extraction or recirculation

A

EAN: 4002516657040 / Material number: 12178460 / Old Material Number: 28W1620EGB

Construction type	
Wall mounted cooker hood	•
Operating modes	
Type of air guide	Convertible
Design	
Colour	Stainless steel
User convenience	
Electronic controls	•
Efficiency and sustainability	
Energy efficiency class (A+++ to D)	A
Annual energy consumption in kWh/year	49.9
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	1 x 3,2 W
Light intensity in Lx	390 lx
Colour temperature in K	3500 Kelvin
Blower	
Dual-action blower	•
AC motor	•
Extraction	
Air throughput in Level 1 (m ³ /h) according to EN 61591	250
Air throughput in Level 2 (m ³ /h) according to EN 61591	395
Air throughput in Intensive level (m ³ /h) according to EN 61591	640
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	62.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	235
Air throughput in Level 2 (m ³ /h) according to EN 61591	390
Air throughput in Booster level (m ³ /h) according to EN 61591	620
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	53.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	64.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	74.0


DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



EAN: 4002516657040 / Material number: 12178460 / Old Material Number: 28W1620EGB

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	50.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	60.0
Technical data	
Canopy width in mm	598
Overall height for vented and external in in. (mm)	673
Overall height for extraction mode and external mode cooker hoods in mm	993
Overall height for recirculation in in. (mm)	803
Overall height for recirculation mode cooker hoods in mm	1123
Canopy height in mm	50
Canopy depth in mm	500
Net weight in kg	13.4
Length of supply lead in m	1.4
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Total rated load in kW	0.24
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Accessories supplied	
Non-return flap	•
Optional accessories	
Active charcoal filter	Nein

DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation

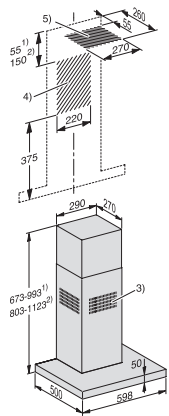

DAW1620, Installation drawings

1) Extraction, 2) Recirculation, 3) Ventilation grille positioned at the top for recirculation, 4+5) Installation area (only 4 required for recirculation mode)