


DAS 4640
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

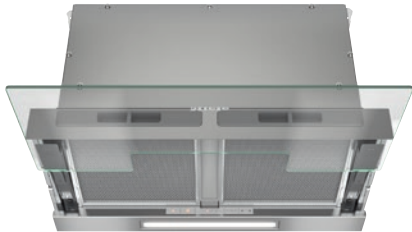


- Perfect combination with Con@ctivity-enabled hobs
- Light design – transparent glass panel, 60 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

A+

EAN: 4002516496298 / Material number: 11878230 / Old Material Number: 28S4640TGB

Construction type	
Slimline cooker hood	•
Operating modes	
Type of air guide	Convertible
Recirculation conversion kit (order separately)	DUU 151
Design	
Colour	Transp. glass
User convenience	
Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Touch-on-glass controls	•
Run-on time 5/15 min.	•
Programmable Booster level switch-off	•
Grease filter saturation indicator	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
Efficiency and sustainability	
Energy efficiency class (A+++ to D)	A+
Annual energy consumption in kWh/year	27.4
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
ECO motor	•
PowerManagement system	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
LED	•
Number x W	1 x 3 W
Light intensity in lx	300 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Blower	
Dual-action blower	•
DC motor	•
Extraction	
Air throughput in Level 1 (m ³ /h) according to EN 61591	180
Air throughput in Level 2 (m ³ /h) according to EN 61591	270
Air throughput in Intensive level (m ³ /h) according to EN 61591	600
Air throughput in Level 3 (m ³ /h) according to EN 61591	380
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	37.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	45.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52.0


DAS 4640
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

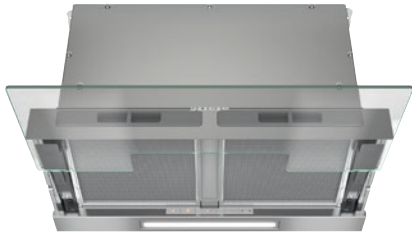

EAN: 4002516496298 / Material number: 11878230 / Old Material Number: 28S4640TGB

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	64.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	23.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	31.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	50.0
Recirculation	
Air throughput in Level 1 (m³/h) according to EN 61591	160
Air throughput in Level 2 (m³/h) according to EN 61591	260
Air throughput in Level 3 (m³/h) according to EN 61591	405
Air throughput in Booster level (m³/h) according to EN 61591	580
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	41.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	50.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	70.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	27.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Safety	
Safety switch-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in mm	561
Canopy height in mm	68
Canopy depth in mm	307
Net weight in kg	12.0
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Total rated load in kW	0.08
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Fitting template	•


DAS 4640
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

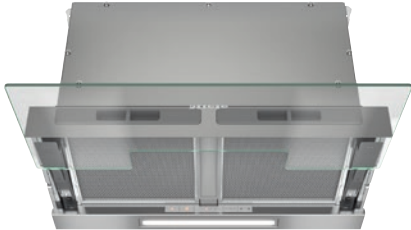

EAN: 4002516496298 / Material number: 11878230 / Old Material Number: 28S4640TGB

Accessories supplied	
Non-return flap	•
Optional accessories	
Active charcoal filter	Nein

DAS 4640
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

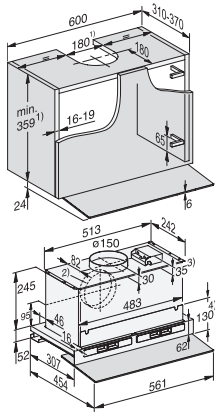

DAS4640, Installation drawings

- 1) Extraction, recirculation with conversion kit DUU 150.,
- 2) Alternative ducting connection to the rear., 3) Accessory DSM module., , The height of the wall unit and the cut-out dimensions must take into account any accessories fitted (e.g. silencer, recirculation hood conversion kit, DSM module)