


DAS 4940  
Slimline cooker hood  
for installation in narrow wall units with EasySwitch controls

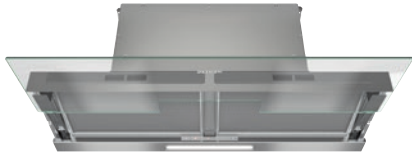


- Perfect combination with Con@ctivity-enabled hobs
- Light design – transparent glass panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

**A++**

EAN: 4002516496366 / Material number: 11878240 / Old Material Number: 28S4940TGB

<b>Construction type</b>	
Slimline cooker hood	•
<b>Operating modes</b>	
Type of air guide	Convertible
Recirculation conversion kit (order separately)	DUU 151
<b>Design</b>	
Colour	Transp. glass
<b>User convenience</b>	
Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Touch-on-glass controls	•
Run-on time 5/15 min.	•
Programmable Booster level switch-off	•
Grease filter saturation indicator	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
<b>Efficiency and sustainability</b>	
Energy efficiency class (A+++ to D)	A++
Annual energy consumption in kWh/year	24.8
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
ECO motor	•
PowerManagement system	•
<b>Cleaning convenience</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
<b>Lighting</b>	
LED	•
Number x W	1 x 3 W
Light intensity in lx	285 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
<b>Blower</b>	
Dual-action blower	•
DC motor	•
<b>Extraction</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	200
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	290
Air throughput in Intensive level (m <sup>3</sup> /h) according to EN 61591	625
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	400
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	36.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	51.0


DAS 4940  
Slimline cooker hood  
for installation in narrow wall units with EasySwitch controls

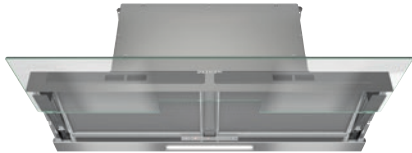

EAN: 4002516496366 / Material number: 11878240 / Old Material Number: 28S4940TGB

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	62.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	22.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	48.0
<b>Recirculation</b>	
Air throughput in Level 1 (m³/h) according to EN 61591	175
Air throughput in Level 2 (m³/h) according to EN 61591	270
Air throughput in Level 3 (m³/h) according to EN 61591	425
Air throughput in Booster level (m³/h) according to EN 61591	610
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	41.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	50.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	70.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	28.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	36.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	47.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	56.0
<b>Safety</b>	
Safety switch-off	•
Single-ply safety glass (ESG)	•
<b>Technical data</b>	
Canopy width in mm	861
Canopy height in mm	68
Canopy depth in mm	307
Net weight in kg	15.0
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Total rated load in kW	0.08
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Number of phases	1
<b>Installation notes</b>	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Fitting template	•



DAS 4940  
Slimline cooker hood  
for installation in narrow wall units with EasySwitch controls

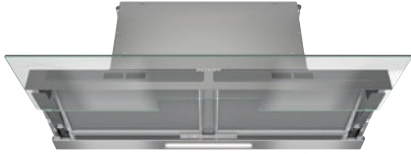

EAN: 4002516496366 / Material number: 11878240 / Old Material Number: 28S4940TGB

<b>Accessories supplied</b>	
Non-return flap	•
<b>Optional accessories</b>	
Active charcoal filter	Nein

DAS 4940  
Slimline cooker hood  
for installation in narrow wall units with EasySwitch controls



DAS4940, Installation drawings

- 1) Extraction, recirculation with conversion kit DUU 150.,
  - 2) Alternative ducting connection to the rear.,
  - 3) Accessory DSM module.,
- The height of the wall unit and the cut-out dimensions must take into account any accessories fitted (e.g. silencer, recirculation hood conversion kit, DSM module)