

DA 3568

Slimline cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



- Elegant design – slim 592 mm extractor canopy
- Energy-efficient and uniform illumination – 2 LED spotlights
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- For perfect functionality – accessories for proper venting

A++

EAN: 4002515988176 / Material number: 10851420 / Old Material Number: 28356855GB

Construction type	
Slimline cooker hood	•
Operating modes	
Type of air guide	Convertible
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 19-P
Design	
Colour	Stainless steel
User convenience	
Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Miele@mobile app	•
Power levels (number without Booster level)	3
Run-on time 5/15 min.	•
Programmable Booster level switch-off	•
Grease filter saturation indicator	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
Efficiency and sustainability	
Energy efficiency class (A+++ to D)	A++
Annual energy consumption in kWh/year	24.5
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	C
ECO motor	•
PowerManagement system	•
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in lx	420 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Blower	
Dual-action blower	•
DC motor	•
Extraction	
Air throughput in Level 1 (m ³ /h) according to EN 61591	190
Air throughput in Level 2 (m ³ /h) according to EN 61591	290
Air throughput in Intensive level (m ³ /h) according to EN 61591	635
Air throughput in Level 3 (m ³ /h) according to EN 61591	400
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	36.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44.0

DA 3568

Slimline cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515988176 / Material number: 10851420 / Old Material Number: 28356855GB

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	51.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	63.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	22.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	49.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	140
Air throughput in Level 2 (m ³ /h) according to EN 61591	225
Air throughput in Level 3 (m ³ /h) according to EN 61591	365
Air throughput in Booster level (m ³ /h) according to EN 61591	530
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	46.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	55.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	65.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	73.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	32.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	41.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	51.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	59.0
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	592
Canopy height in mm	37
Canopy depth in mm	309
Net weight in kg	15.0
Length of supply lead in m	1.5
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Total rated load in kW	0.08
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•

DA 3568

Slimline cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.




EAN: 4002515988176 / Material number: 10851420 / Old Material Number: 28356855GB

Diameter of exhaust duct in mm	150
Combination with WiFi-enabled Miele hob	recommended
Optional accessories	
Active charcoal filter	Nein

DA 3568

Slimline cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.

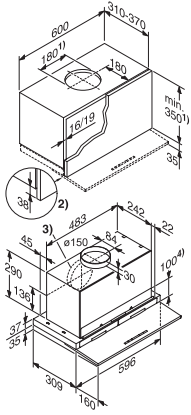

DA3568

1. Vented, recirculation with DUU 150, when air is directed through a cut-out in the roof of the housing unit., 2. Housing unit carcass is 38 mm shorter than the door., 3. Vent connection alternatively to the rear., 4. After the wall unit has been installed, a partition can be fitted. The slots for grease filters and odour-absorbing filters for use in recirculation mode must be accessible., , In regard to dimensions for wall unit height and cut-outs, fitted accessories should be taken into account (e.g. silencers, XKM module).