

DG 2840

Built-in steam oven

for healthy cooking with automatic programmes.



- 7-segment display with sensor controls – EasySensor
- Perfect results – DualSteam technology
- Perfect results guaranteed every time – Automatic programmes
- Easy preparation of a complete meal – menu cooking
- Plenty of room – 40 l stainless steel oven compartment

EAN: 4002516156635 / Material number: 11094400 /

Old Material Number: 23284040GB

Construction type and design	
Built-in steam oven	•
Appliance colour	Stainless steel/Clean Steel
Efficiency and sustainability	
Power rating in off mode in W	0.5
Power rating in standby mode in W	1.0
Power rating in networked standby in W	2.0
Time until automatic switch to off mode in min	20
Time until automatic switch to standby in min	20
Time until automatic switch to networked standby in min	20
Construction type and design	
PureLine	•
Convenience features	
External steam generation	•
Menu cooking without transfer of taste	•
Automatic programmes with ability to make individual adjustments	•
Operating modes	
Steam cooking	•
Eco steam cooking	•
Defrosting	•
Reheat	•
Automatic programmes	•
User convenience	
Display	EasySensor
SoftOpen	•
SoftClose	•
Quantity-independent cooking	•
Steam cooking on up to 3 levels at the same time	•
Menu cooking with steam	•
Steam reduction before end of programme	•
Programmable cooking duration	•
Actual temperature display	•
Individual settings	•
Cleaning and care	
Stainless steel/CleanSteel finish	•
Stainless-steel oven compartment with linen structure	•
External steam generator	•
Floor heater for condensate reduction	•
Quick-release side racks	•
Removable stainless-steel side racks	•
Descaling	•
CleanGlass door	•
Steam techn./water supply	
DualSteam	•
Fresh water container volume in l	1.5
Removal of fresh water container with Push2release	•

DG 2840

Built-in steam oven

for healthy cooking with automatic programmes.



EAN: 4002516156635 / Material number: 11094400 /

Old Material Number: 23284040GB

## Safety

Appliance cooling system and touch-cool front

•

Safety switch-off

•

Vapour cooling system

•

## Technical data

L oven compartment

•

Oven compartment volume in l

40

No. of shelf levels

4

Appliance dimensions (W x H x D) in mm

595 x 455 x 569

Door hinge

Bottom

Electronic steam oven temperature regulation min. in °C

40

Electronic steam oven temperature regulation max. in °C

100

Niche width min. in mm

560

Niche width max. in mm

568

Niche height min. in mm

450

Niche height max. in mm

452

Niche depth in mm

550

Appliance dimensions (W x H x D) in mm

595 x 455 x 569

Appliance width in mm

595

Appliance height in mm

455

Appliance depth in mm

569

Weight in kg

26.8

Total rated load in kW

3.60

Voltage in V

230

Frequency in Hz

50-60

Fuse rating in A

16

Number of phases

1

Mains cable with plug

•

Length of supply lead in m

2

## Accessories included

Removable side runners (pair)

1

No. of perforated stainless-steel cooking container

2

Solid stainless steel cooking containers

1

Solid stainless steel cooking containers, 40 mm high

1

Wire rack

1


Drip tray DGG 100 40

1

Descaling tablets


2

DG 2840  
Built-in steam oven  
for healthy cooking with automatic programmes.

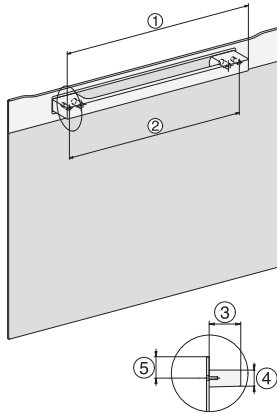


H7000 handle, installation drawing


1) 400 mm, 2) 360 mm, 3) 47 mm, 4) 24 mm, 5) 32.5 mm

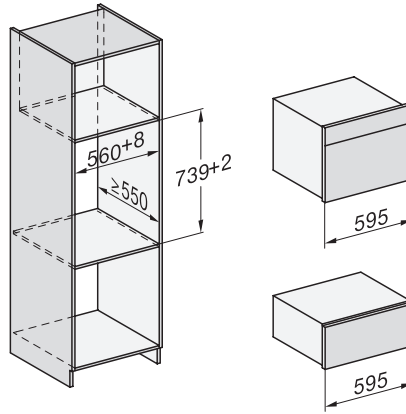


Installation DG, DGM, DGC XL, ESW7x20 installation drawings

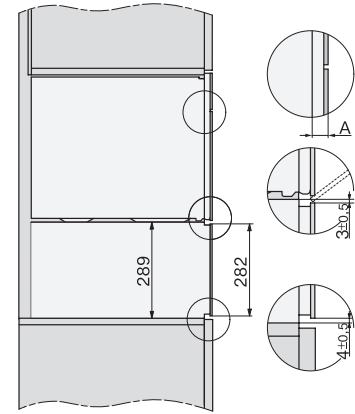

side view, DG, DGM, ESW7x20 installation drawings

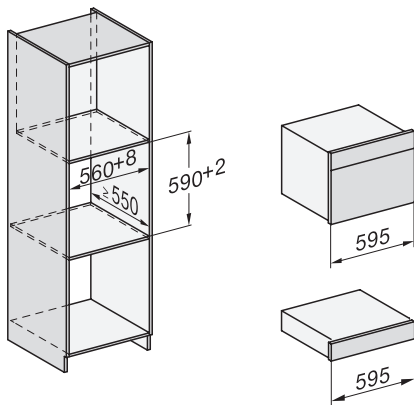


Installation\_DG\_DGM\_DGC\_XL\_ESW7x10\_EVS7010, installation drawings

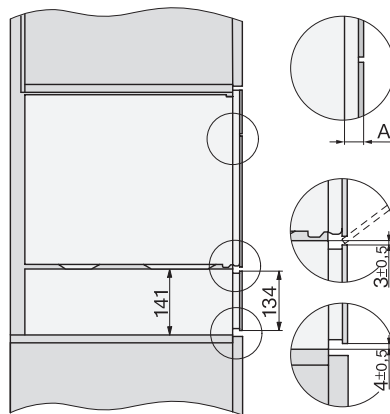


Side view\_DG\_DGM\_ESW7x10\_EVS7010 installation drawings


A) 22 mm glass, 23,3 mm stainless steel

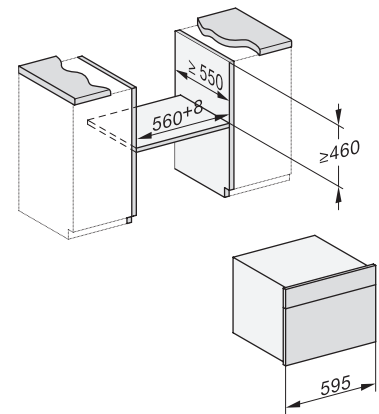


built-in DG DGM DGC XL build-under, installation drawing

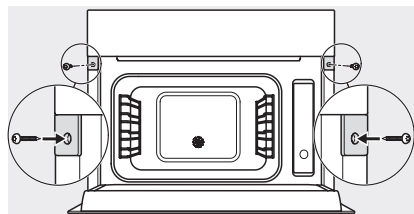

Screw joint DG DGM, installation drawing

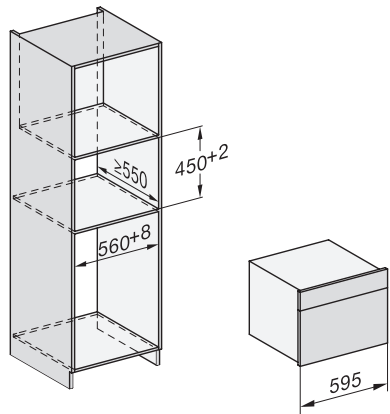

DG DGM, installation drawing

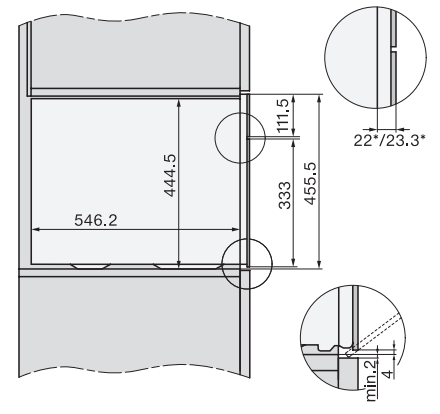


side view DG DGM, installation drawing, GB, AU  
22 mm glass, 23,3 mm stainless steel

DG 2840

Built-in steam oven

for healthy cooking with automatic programmes.

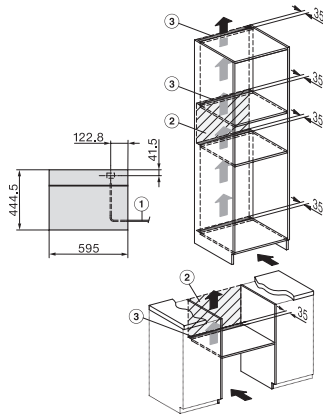

installation DG, installation drawing, GB, AU

1) Mains connection cable, L=2000 mm, 2) No connection in this area, 3) Ventilation cutout min. 180 cm<sup>2</sup>