

DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



- Linear design with 880 mm width and minimum depth of 260 mm
- Modern touch controls on glass front
- LED strip for uniform lighting
- Wide rack – can be used as a shelf for herbs, for example
- Efficient filtration- 10-ply stainless-steel grease filter



EAN: 4002516798620 / Material number: 12526670 /
Old Material Number: 28909240GB

Construction type and design	
Appliance colour	Obsidian black
Construction type	
Wall mounted cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKF 29 charcoal filter
User convenience	
Electronic controls	•
Touch controls	•
Controls	Touch-on-glass controls
Power levels (number without Booster level)	3
Booster levels	1
Programmable Booster level switch-off	•
Silence package	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	67.7
Energy efficiency class (A+++ – D)	B
Grease filtering efficiency class	B
Fluid dynamic efficiency class	B
Lighting efficiency class	A
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
LED	•
Number x W	1 x 3,2 W
Light intensity in lx	300 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action fan	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m³/h) according to EN 61591	205
Air throughput in Level 2 (m³/h) according to EN 61591	310
Air throughput in Level 3 (m³/h) according to EN 61591	415
Air throughput in booster level 1 (m³/h)	670
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	39.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	45.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	50.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	62.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	25.0

DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



EAN: 4002516798620 / Material number: 12526670 /

Old Material Number: 28909240GB

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	31.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	36.0
--	------

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	48.0
---	------

Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591	190
--	-----

Air throughput in Level 2 (m³/h) according to EN 61591	290
--	-----

Air throughput in Level 3 (m³/h) according to EN 61591	385
--	-----

Air throughput in Booster level 1 (m³/h) according to EN 61591	605
--	-----

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	44.0
--	------

Noise power level in Intensive level (dB(A) re 1 pW) according to EN 60704-3	69.0
--	------

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	51.0
--	------

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	58.0
--	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
--	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	44.0
--	------

Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13	55.0
--	------

Safety

Safety switch-off	•
-------------------	---

Single-ply safety glass (ESG)	•
-------------------------------	---

Technical data

Overall hood height for extraction mode and external in mm	500
--	-----

Overall height for recirculation mode cooker hoods in mm	500
--	-----

Overall height for vented and external in in. (mm)	500
--	-----

Canopy width in mm	880
--------------------	-----

Overall height for extraction mode and external mode cooker hoods in mm	500
---	-----

Canopy height in mm	500
---------------------	-----

Overall height for recirculation in in. (mm)	500
--	-----

Canopy depth in mm	260
--------------------	-----

Overall height for recirculation mode cooker hoods in mm	500
--	-----

Net weight in kg	21.5
------------------	------

Length of supply lead in m	1.5
----------------------------	-----

Standard plug fitted	•
----------------------	---

Minimum height above electric hobs in mm	450
--	-----

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
--	-----

Number of phases	1
------------------	---

Total rated load in kW	0.20
------------------------	------

Voltage in V	230
--------------	-----

DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.




EAN: 4002516798620 / Material number: 12526670 /
Old Material Number: 28909240GB

Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Accessories included	
Non-return flap	•

DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.

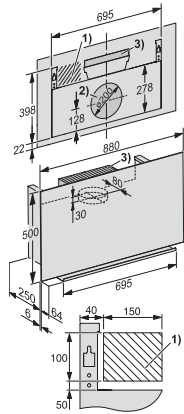

DA9091W, DA9092W (Installation drawings)

1) Installation area for the mains connection., 2) Cut-out when ducting to the rear. Alternative vent connection at the back., 3) Air outlet for recirculation. A distance of at least 200 mm must be maintained between the top of the appliance and the ceiling or any furniture units installed above the appliance.,