ELBA

Family of indoor spotlights for accent lighting.

The luminaire is rotatable by 90° vertically and 355° horizontally to allow the free orientation of the light in any direction.

The heat dissipation structure and built-in driver are combined in an integrated design with a compact and minimal aesthetic.

The light beam angle is adjustable to meet any lighting requirement.

DIMMABLE TRIAC | 2700K

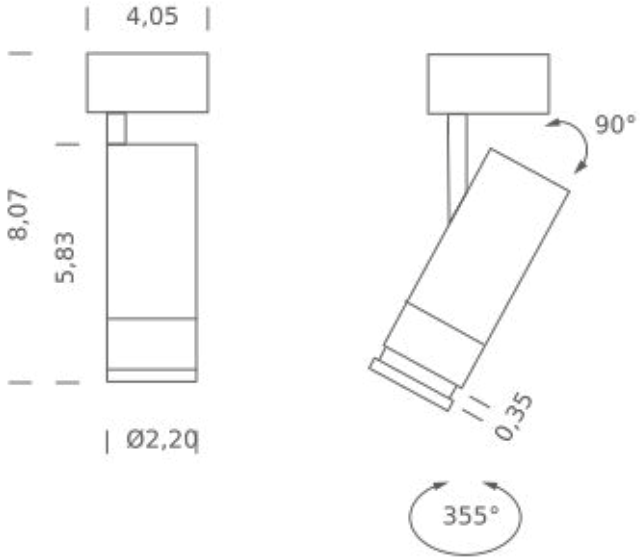

LAMPING

Source	LED spot
Total power	13W
Emission	Direct adjustable 15°-55°
Switching	Dimmable triac
Tension	110/240V
Color temperature	2700K
Luminous flux	900lm
Typ CRI	> 90
IP class	20
Dimensions	ø2,20x5,9
Materials	Aluminum
Notes	driver on board, compatible with track 3~110V
Net lamp weight	1,15 lbs

Codes	*Structure*
ELB LW2 81 US	white
ELB LN2 81 US	black

PACKAGE

Package 01	Dimension: 15,67x15,67x9,76 inches / Gross weight: 1,43 lbs

Certificazioni

Intertek

DIMMABLE TRIAC | 3000K

LAMPING

Source	LED spot
Total power	13W
Emission	Direct adjustable 15°-55°
Switching	Dimmable triac
Tension	110/240V
Color temperature	3000K
Luminous flux	900lm
Typ CRI	> 90
IP class	20
Dimensions	ø2,20x5,9
Materials	Aluminum
Notes	driver on board, compatible with track 3~110V
Net lamp weight	1,15 lbs

Codes	*Structure*
ELB LW3 81 US	white
ELB LN3 81 US	black

PACKAGE

Package 01	Dimension: 15,67x15,67x9,76 inches / Gross weight: 1,43 lbs

Certificazioni

Intertek

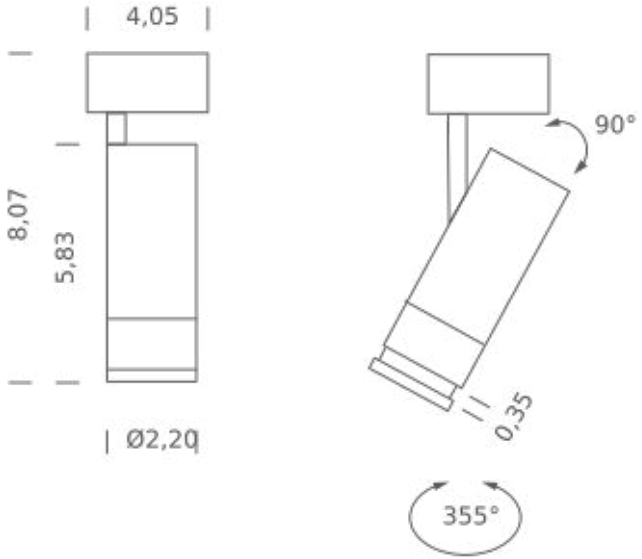

DIMMABLE TRIAC | 4000K

LAMPING

Source	LED spot
Total power	13W
Emission	Direct adjustable 15°-55°
Switching	Dimmable triac
Tension	110/240V
Color temperature	4000K
Luminous flux	900lm
Typ CRI	> 90
IP class	20
Dimensions	ø2,20x5,9
Materials	Aluminum
Notes	driver on board, compatible with track 3~110V
Net lamp weight	1,15 lbs

Codes	*Structure*
ELB LW4 82 US	white
ELB LN4 82 US	black

PACKAGE

Package 01	Dimension: 15,67x15,67x9,76 inches / Gross weight: 1,43 lbs

Certificazioni
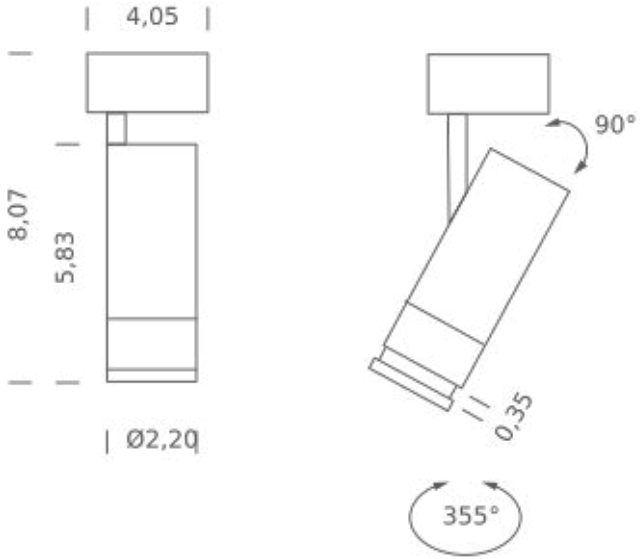
Intertek