


SPIGOLO PENDANT HORIZONTAL

Studiocharlie

Pendant lamp based on an extruded and tubular aluminum structure, connected with molded polymer joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources, one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. Allows the enlightenment of the ambience in a versatile and a comfortable way. LED sources are dimmable.

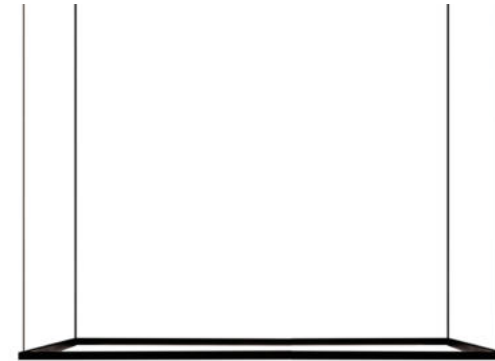

LED

LAMPING

Source	LINEAR LED
Total power	24 + 24W
Emission	DOUBLE, DIFFUSED
Switching	dimmable 1-10V, mono switch
Tension	120V
Color temperature	3000K
Luminous flux	1420 + 1420 lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	44.9" x 22.8" x .8"
Materials	aluminum + pc + abs
Notes	metal cable length 9.8' , electrical cable length 16.4' , orientable diffusers 360°, decentralized canopy
Accessories	Lipari ring,
Net lamp weight	6,2 lbs

Codes

SPI LWW 52
SPI LNN 52


Structure/Diffuser

white/white
black/white

PACKAGE

Package 01	Dimension: 7.1" x 8.7" x 26" inches / Net weight: 6,6 lbs / Gross weight: 6.7" x 7.1" x 46.5" lbs
Package 02	Gross weight: 4 lbs

Certificazioni

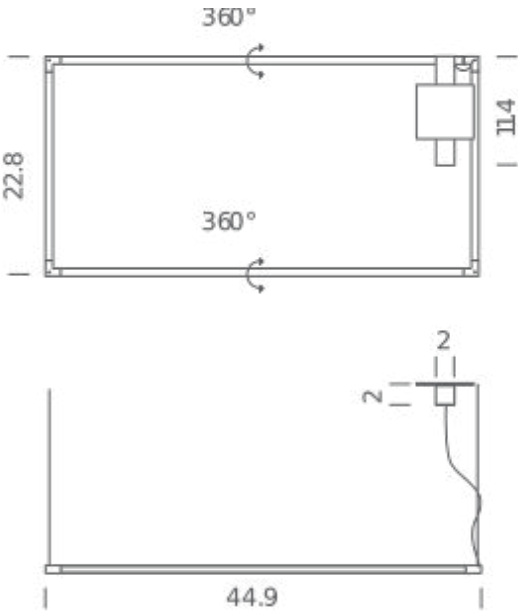

LED

LAMPING

Source	LINEAR LED
Total power	24 + 24W
Emission	DOUBLE, DIFFUSED
Switching	dimmable 1-10V, mono switch
Tension	120V
Color temperature	2700K
Luminous flux	1421 + 1420 lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	44.9" x 22.8" x .8"
Materials	aluminum + pc + abs
Notes	metal cable length 9.8' , electrical cable length 16.4' , orientable diffusers 360°, decentralized canopy
Accessories	Lipari ring,
Net lamp weight	6,2 lbs

Codes

SPI LWW 54
SPI LNN 54


Structure/Diffuser

white/white
black/white

PACKAGE

Package 01	Dimension: 7.1" x 8.7" x 26" inches / Net weight: 6,6 lbs / Gross weight: 6.7" x 7.1" x 46.5" lbs
Package 02	Gross weight: 4 lbs


Certificazioni

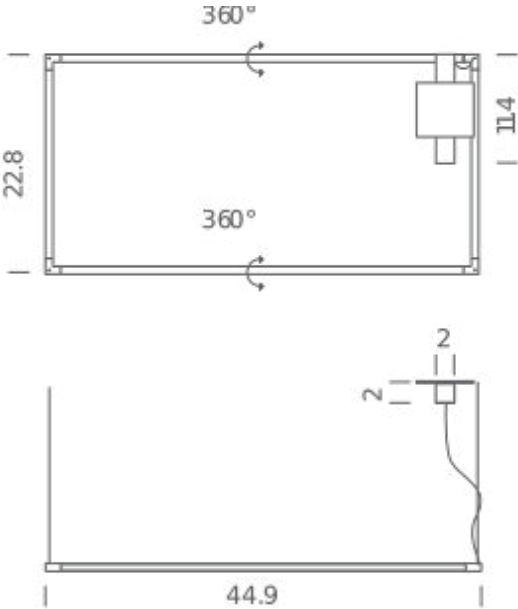

SPIGOLO PENDANT VERTICAL

Studiocharlie

Pendant lamp based on an extruded and tubular aluminum structure, connected with molded polymer joints, with white or black painted finish. Thanks to the joints, enabling the profiles to house LED sources, one can rotate 360° in order to produce a directional direct or indirect lighting, screened by an opaline diffuser in polycarbonate. Allows the enlightenment of the ambience in a versatile and a comfortable way. LED sources are dimmable.

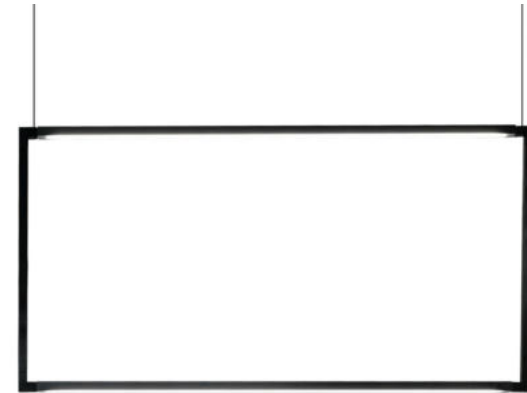

LED

LAMPING

Source	LINEAR LED
Total power	24 + 24W
Emission	DOUBLE, DIFFUSED
Switching	dimmable 1-10V, mono switch
Tension	120V
Color temperature	3000K
Luminous flux	1422 + 1420 lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	22.8" x .8" x 44.9"
Materials	aluminum + pc + abs
Notes	cable length 9.8' , orientable diffusers 360°
Accessories	Lipari ring,
Net lamp weight	6,2 lbs

Codes

SPI LWW 51
SPI LNN 51

Structure/Diffuser

white/white
black/white


PACKAGE

Package 01

Dimension: 7.1" x 8.7" x 26" inches / Net weight: 6,6 lbs /
Gross weight: 6.7" x 7.1" x 46.5" lbs
Gross weight: 4 lbs

Package 02

Certificazioni

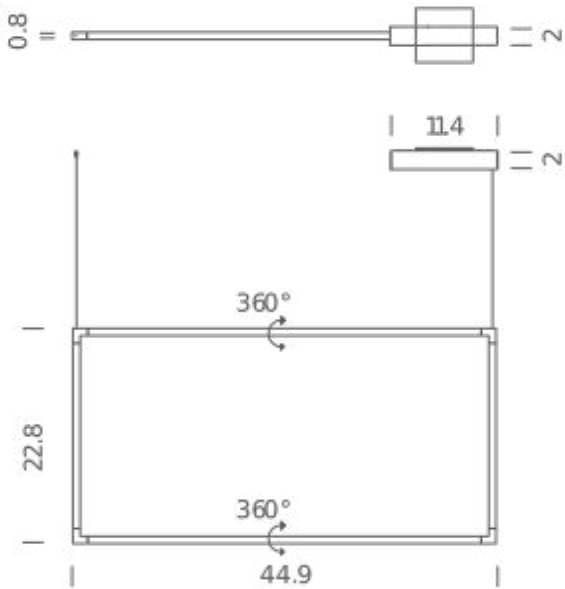

LED

LAMPING

Source	LINEAR LED
Total power	24 + 24W
Emission	DOUBLE, DIFFUSED
Switching	dimmable 1-10V, mono switch
Tension	120V
Color temperature	2700K
Luminous flux	1423 + 1420 lm (luminous output)
Typ CRI	85
Energy class	A+
IP class	20
Dimensions	22.8" x .8" x 44.9"
Materials	aluminum + pc + abs
Notes	cabl length 9.8' , orientable diffusers 360°
Accessories	Lipari ring,
Net lamp weight	6,2 lbs

Codes

SPI LWW 53
SPI LNN 53

Structure/Diffuser

white/white
black/white

PACKAGE

Package 01

Dimension: 7.1" x 8.7" x 26" inches / Net weight: 6,6 lbs /
Gross weight: 6.7" x 7.1" x 46.5" lbs
Gross weight: 4 lbs

Package 02

Certificazioni

