


# ZIRKOL – C

ZIRKOL – C is a family of circular suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures.

Driver and dimmer interface included

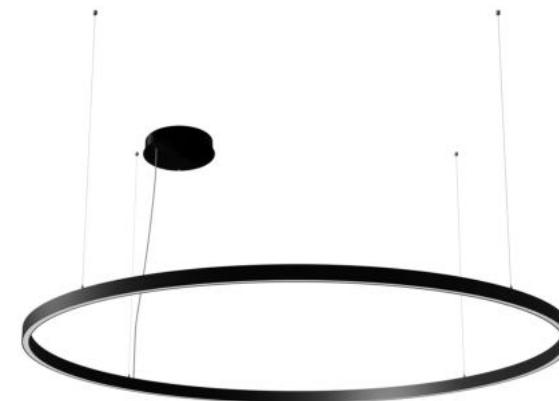

# HOME 39.4" | DOWNLIGHT - 2700K

## LAMPING

|                   |                     |
|-------------------|---------------------|
| Source            | Linear LED          |
| Total power       | 45W                 |
| Emission          | Diffused orientable |
| Switching         | DALI 1-100%         |
| Tension           | 110/240V            |
| Color temperature | 2700K               |
| Luminous flux     | 2616lm              |
| Typ CRI           | 90                  |
| IP class          | IP40                |
| Dimensions        | ø39.4x1.9           |
| Materials         | Aluminum            |
| Notes             |                     |

Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled.

## Codes

UZRC1610G15DBO  
UZRC1610G15DNE  
UZRC1610G15DOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




CIRCLE HOME 39.4"




| Ø 39.4 |

CIRCLE HOME 59"



| Ø 59 |

CIRCLE 78.7



| Ø 78.7 |

# HOME 39.4" | DOWNLIGHT - 3000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 45W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 3000K  |
| Luminous flux     | 2769lm   |
| Typ CRI           | 90   |
| IP class          | 40   |
| Dimensions        | ø39.4x1.9  |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 13.1'   3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black   RAL 9016 white   shipped assembled. |

## Codes

UZRC1610G15WBO  
UZRC1610G15WNE  
UZRC1610G15WOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




CIRCLE HOME 39.4"




| Ø 39.4 |

CIRCLE HOME 59"



| Ø 59 |

CIRCLE 78.7



| Ø 78.7 |

# HOME 39.4" | DOWNLIGHT - 4000K

## LAMPING

|                   |                     |
|-------------------|---------------------|
| Source            | Linear LED          |
| Total power       | 45W                 |
| Emission          | Diffused orientable |
| Switching         | DALI 1-100%         |
| Tension           | 110/240V            |
| Color temperature | 4000K               |
| Luminous flux     | 3077lm              |
| Typ CRI           | 90                  |
| IP class          | IP40                |
| Dimensions        | ø39.4x1.9           |
| Materials         | Aluminum            |
| Notes             |                     |

Round canopy with 1 x driver WALIMLED100/24 | 1 x dimmer interface WDIMDALIHP | 1 x electrical cable 13.1' | 3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black | RAL 9016 white | shipped assembled.

## Codes

UZRC1610G15NBO  
UZRC1610G15NNE  
UZRC1610G15NOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




CIRCLE HOME 39.4"




| Ø 39.4 |

CIRCLE HOME 59"



| Ø 59 |

CIRCLE 78.7



| Ø 78.7 |

# HOME 39.4" | UP-DOWNLIGHT - 2700K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 90W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 2700K   |
| Luminous flux     | 5231lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø39.4x1.9   |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 13.1'   3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black   RAL 9016 white   shipped assembled |

## Codes

UZRC1710G15DBO  
UZRC1710G15DNE  
UZRC1710G15DOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




### CIRCLE HOME 39.4"




| Ø 39.4 |

### CIRCLE HOME 59"

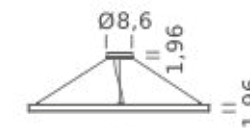

| Ø 59 |

### CIRCLE 78.7

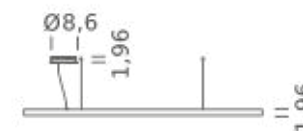

| Ø 78.7 |

# HOME 39.4" | UP-DOWNLIGHT - 3000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 90W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 3000K   |
| Luminous flux     | 5539lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø39.4x1.9   |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 13.1'   3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black   RAL 9016 white   shipped assembled |

## Codes

UZRC1710G15WBO  
UZRC1710G15WNE  
UZRC1710G15WOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




CIRCLE HOME 39.4"




| Ø 39.4 |

CIRCLE HOME 59"



| Ø 59 |

CIRCLE 78.7



| Ø 78.7 |

# HOME 39.4" | UP-DOWNLIGHT - 4000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 90W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 4000K   |
| Luminous flux     | 6154lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø39.4x1.9   |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 13.1'   3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black   RAL 9016 white   shipped assembled |

## Codes

UZRC1710G15NBO  
UZRC1710G15NNE  
UZRC1710G15NOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




CIRCLE HOME 39.4"




| Ø 39.4 |

CIRCLE HOME 59"



| Ø 59 |

CIRCLE 78.7



| Ø 78.7 |

# HOME 59" | DOWNLIGHT - 2700K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 68W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 2700K   |
| Luminous flux     | 3923lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø59x1.9   |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 13.1'   3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black   RAL 9016 white   shipped assembled |

## Codes

UZRC1615G15DBO  
UZRC1615G15DNE  
UZRC1615G15DOR


## Structure

matt white  
matt black  
matt gold


## Certificazioni




### CIRCLE HOME 39.4"

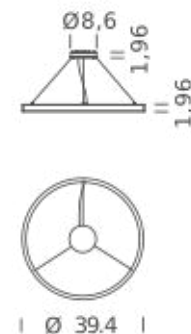

### CIRCLE HOME 59"

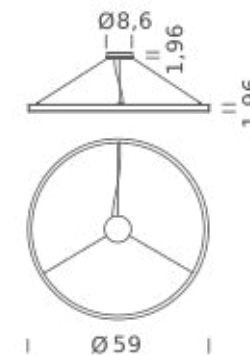

### CIRCLE 78.7

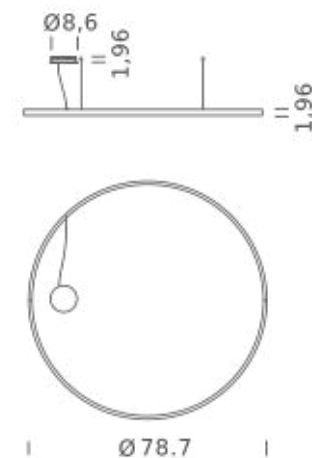



# HOME 59" | DOWNLIGHT - 3000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 68W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 3000K   |
| Luminous flux     | 4154lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø59x1.9   |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 13.1'   3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black   RAL 9016 white   shipped assembled |

## Codes

UZRC1615G15WBO  
UZRC1615G15WNE  
UZRC1615G15WOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




### CIRCLE HOME 39.4"




| Ø 39.4 |

### CIRCLE HOME 59"



| Ø 59 |

### CIRCLE 78.7

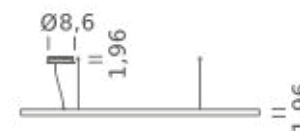

| Ø 78.7 |

# HOME 59" | DOWNLIGHT - 4000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 68W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 4000K   |
| Luminous flux     | 4616lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø59x1.9   |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 13.1'   3 x adjustable metal cable (length from 9.8' to 0,16.4') (including ceiling attachment). RAL 9005 black   RAL 9016 white   shipped assembled |

## Codes

UZRC1615G15NBO  
UZRC1615G15NNE  
UZRC1615G15NOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




### CIRCLE HOME 39.4"




| Ø 39.4 |

### CIRCLE HOME 59"



| Ø 59 |

### CIRCLE 78.7



| Ø 78.7 |

# HOME 78.7" | DOWNLIGHT - 2700K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 90W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 2700K   |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø78.7x1.9   |
| Materials         | Aluminum  |
| Notes             | 1 x driver WALIMLED100/24   1 x dimmer interface<br>WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable<br>metal cable length 9.8' (including ceiling attachment).<br>Remote driver   RAL 9005 black   RAL 9016 white  <br>shipped in 2 pieces |

## Codes

UZRC1620G15DBO  
UZRC1620G15DNE  
UZRC1620G15DOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




CIRCLE HOME 39.4"




| Ø 39.4 |

CIRCLE HOME 59"



| Ø 59 |

CIRCLE 78.7



| Ø 78.7 |

# HOME 78.7" | DOWNLIGHT - 3000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 90W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 3000K   |
| Luminous flux     | 5539lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø78.7x1.9   |
| Materials         | Aluminum  |
| Notes             | 1 x driver WALIMLED100/24   1 x dimmer interface<br>WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable<br>metal cable length 9.8' (including ceiling attachment).<br>Remote driver   RAL 9005 black   RAL 9016 white  <br>shipped in 2 pieces |

## Codes

UZRC1620G15WBO  
UZRC1620G15WNE  
UZRC1620G15WOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




CIRCLE HOME 39.4"




| Ø 39.4 |

CIRCLE HOME 59"



| Ø 59 |

CIRCLE 78.7



| Ø 78.7 |

# HOME 78.7" | DOWNLIGHT - 4000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 90W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 4000K   |
| Luminous flux     | 6154lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | ø78.7x1.9   |
| Materials         | Aluminum  |
| Notes             | 1 x driver WALIMLED100/24   1 x dimmer interface<br>WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable<br>metal cable length 9.8' (including ceiling attachment).<br>Remote driver   RAL 9005 black   RAL 9016 white  <br>shipped in 2 pieces |

## Codes

UZRC1620G15NBO  
UZRC1620G15NNE  
UZRC1620G15NOR


## Structure

matt white  
matt black  
matt gold

## Certificazioni




CIRCLE HOME 39.4"




| Ø 39.4 |

CIRCLE HOME 59"

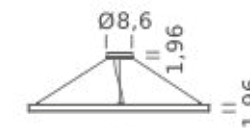

| Ø 59 |

CIRCLE 78.7

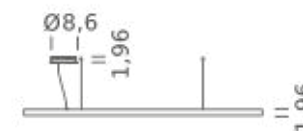

| Ø 78.7 |


# ZIRKOL – S

ZIRKOL-S is a family of polygonal suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures.

Driver and dimmer interface included.

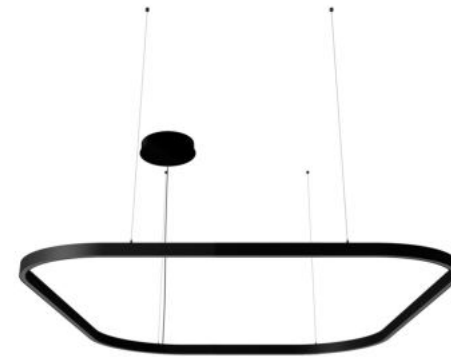

# SQUARE 59"X59" | DOWNLIGHT - 2700K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 77W  |
| Emission          | Diffused oriented  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 2700K  |
| Luminous flux     | 4432lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 59"x59"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |



## Codes

UZRQ1606G15DBO  
UZRQ1606G15DNE  
UZRQ1606G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

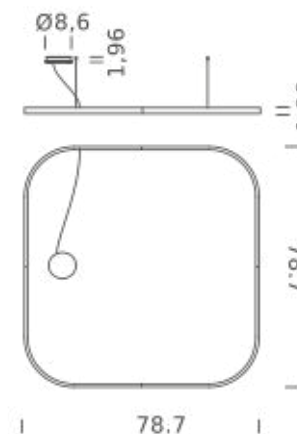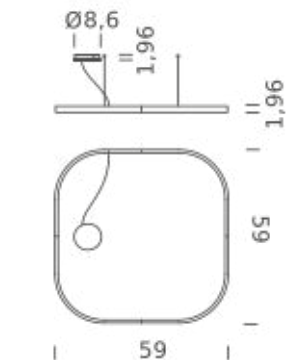

# SQUARE 59"X59" | DOWNLIGHT - 3000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 77W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 3000K  |
| Luminous flux     | 4692lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 59"x59"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |



## Codes

UZRQ1606G15WBO  
UZRQ1606G15WNE  
UZRQ1606G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

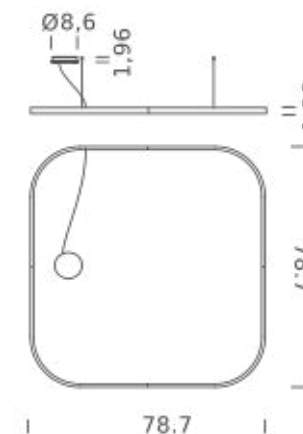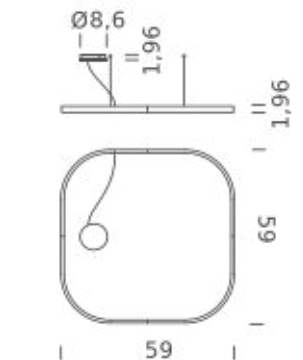



# SQUARE 59"X59" | DOWNLIGHT - 4000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 77W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 4000K  |
| Luminous flux     | 5214lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 59"x59"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |



## Codes

UZRQ1606G15NBO  
UZRQ1606G15NNE  
UZRQ1606G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

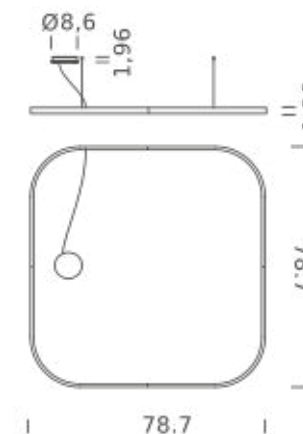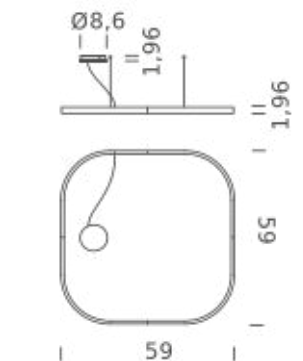

# SQUARE 78.7"X78.7" | DOWNLIGHT - 2700K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 100W   |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 2700K  |
| Luminous flux     | 6098lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 78.7"x78.7"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRQ1608G15DBO  
UZRQ1608G15DNE  
UZRQ1608G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

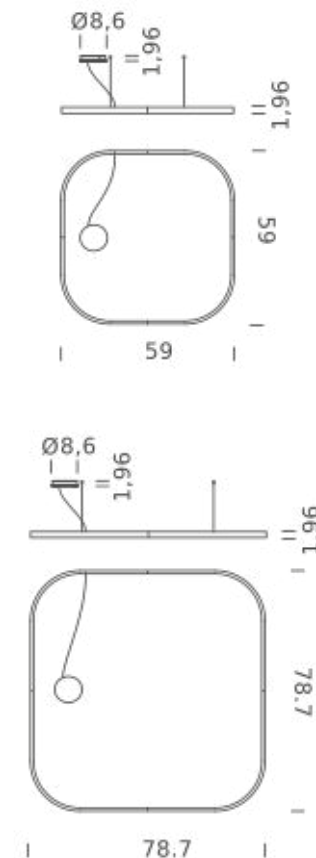

# SQUARE 78.7"X78.7" | DOWNLIGHT - 3000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 100W   |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 3000K  |
| Luminous flux     | 6456lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 78.7"x78.7"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRQ1608G15WBO  
UZRQ1608G15WNE  
UZRQ1608G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

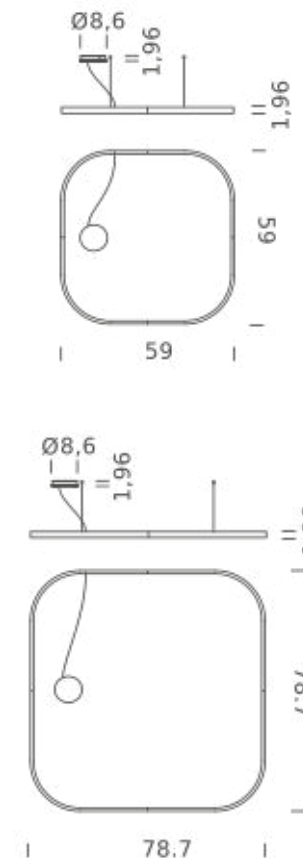

# SQUARE 78.7"X78.7" | DOWNLIGHT - 4000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 100W   |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 4000K  |
| Luminous flux     | 7174lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 78.7"x78.7"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |



## Codes

UZRQ1608G15NBO  
UZRQ1608G15NNE  
UZRQ1608G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

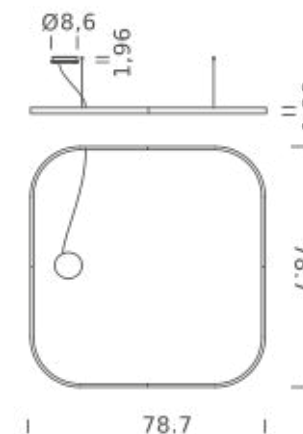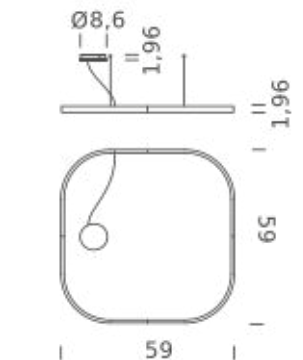


# ZIRKOL – O

ZIRKOL -O is a family of oval suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures.

Driver and dimmer interface included

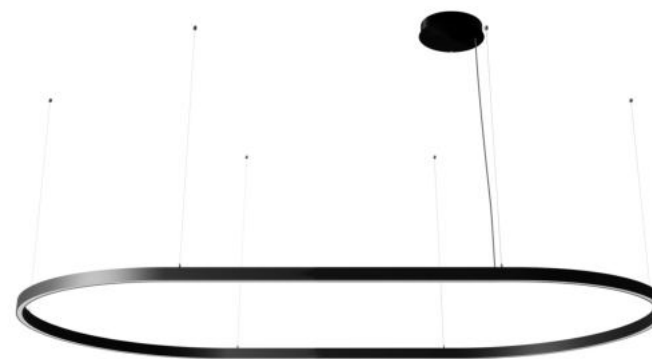

# OVAL 78.7"X39.4" | DOWNLIGHT - 2700K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 74W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 2700K  |
| Luminous flux     | 4282lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 78.7"x39.4"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRO16A20G15DBO  
UZRO16A20G15DNE  
UZRO16A20G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

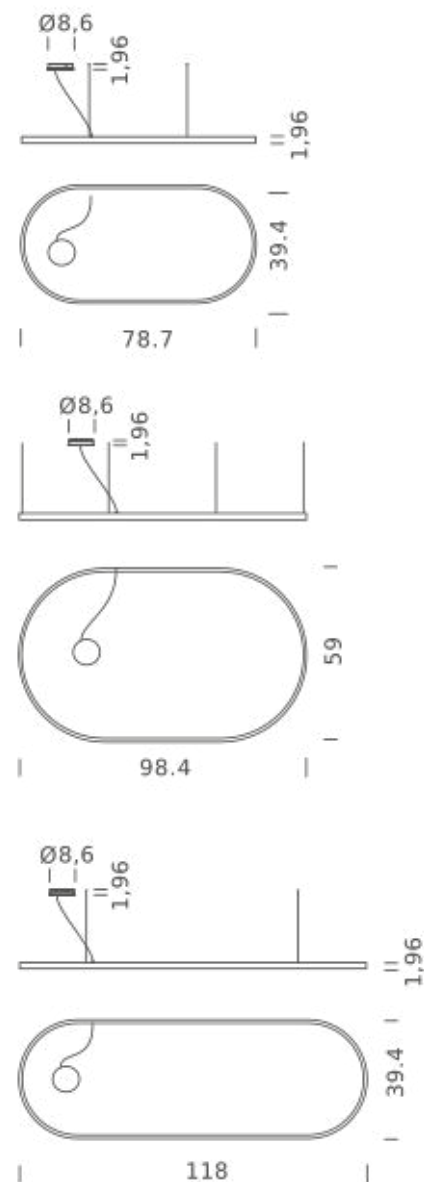

# OVAL 78.7"X39.4" | DOWNLIGHT - 3000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 74W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 3000K  |
| Luminous flux     | 4533lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 78.7"x39.4"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRO16A20G15WBO  
UZRO16A20G15WNE  
UZRO16A20G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

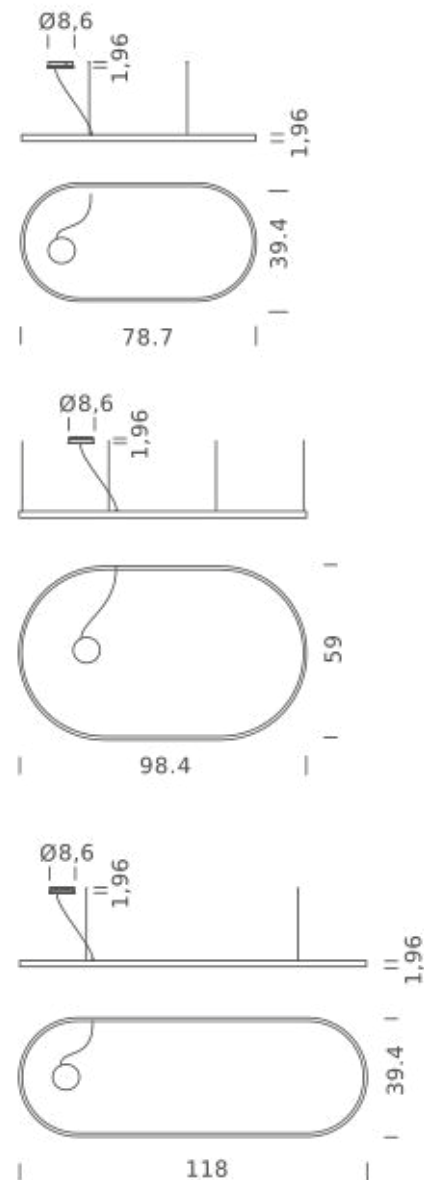

# OVAL 78.7"X39.4" | DOWNLIGHT - 4000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 74w  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 4000K  |
| Luminous flux     | 5037lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 78.7"x39.4"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRO16A20G15NBO  
UZRO16A20G15NNE  
UZRO16A20G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

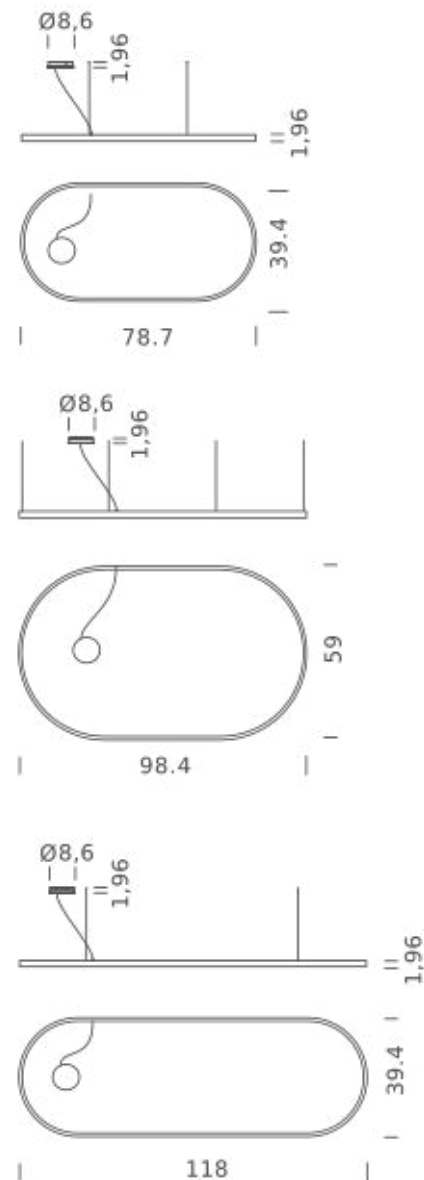



# OVAL 118"X39.4" | DOWNLIGHT - 2700K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 98W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 2700K  |
| Luminous flux     | 5948lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 118"x39.4"x1.9"  |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRO16A30G15DBO  
UZRO16A30G15DNE  
UZRO16A30G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

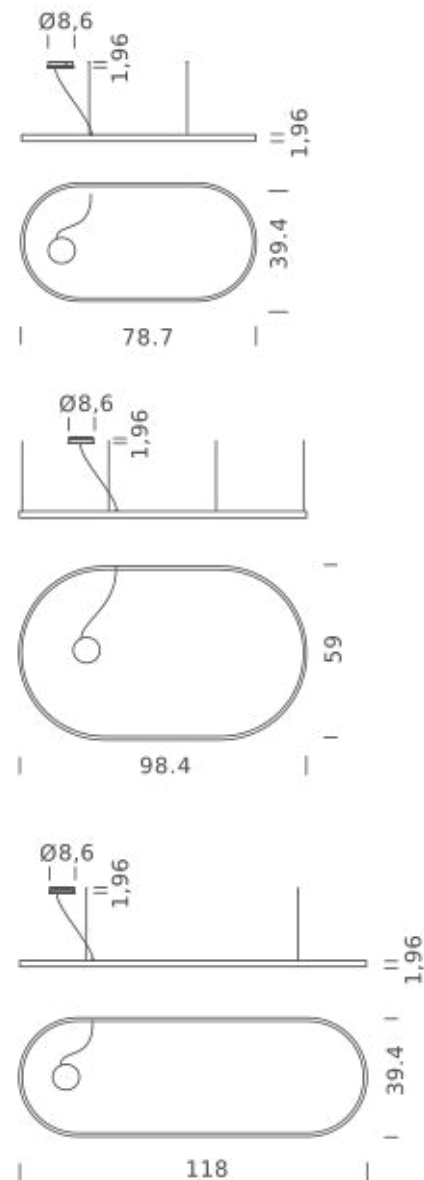

# OVAL 118"X39.4" | DOWNLIGHT - 3000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 98W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 3000K  |
| Luminous flux     | 6297lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 118"x39.4"x1.9"  |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRO16A30G15WBO  
UZRO16A30G15WNE  
UZRO16A30G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

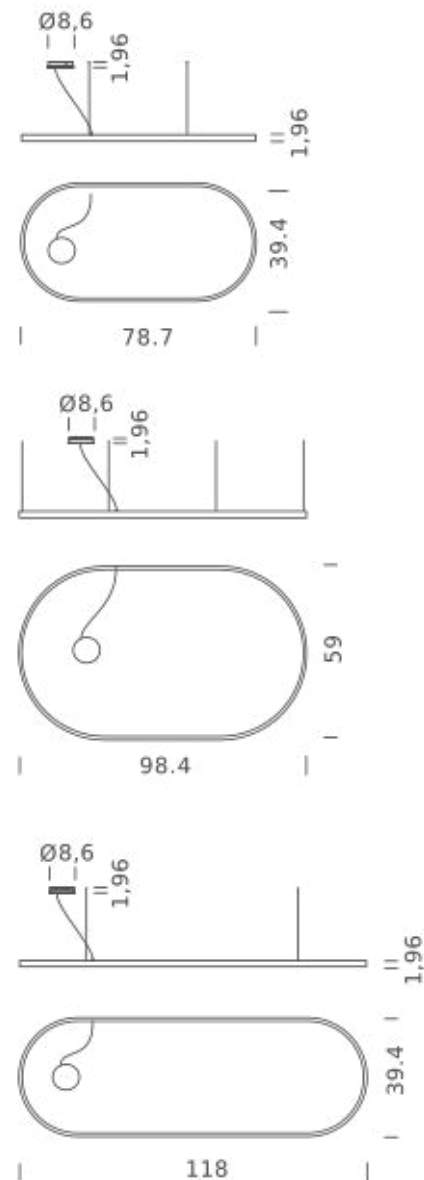

# OVAL 118"X39.4" | DOWNLIGHT - 4000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 98W  |
| Emission          | Diffused oriented  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 4000K  |
| Luminous flux     | 6997lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 118"x39.4"x1.9"  |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   4 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRO16A30G15NBO  
UZRO16A30G15NNE  
UZRO16A30G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

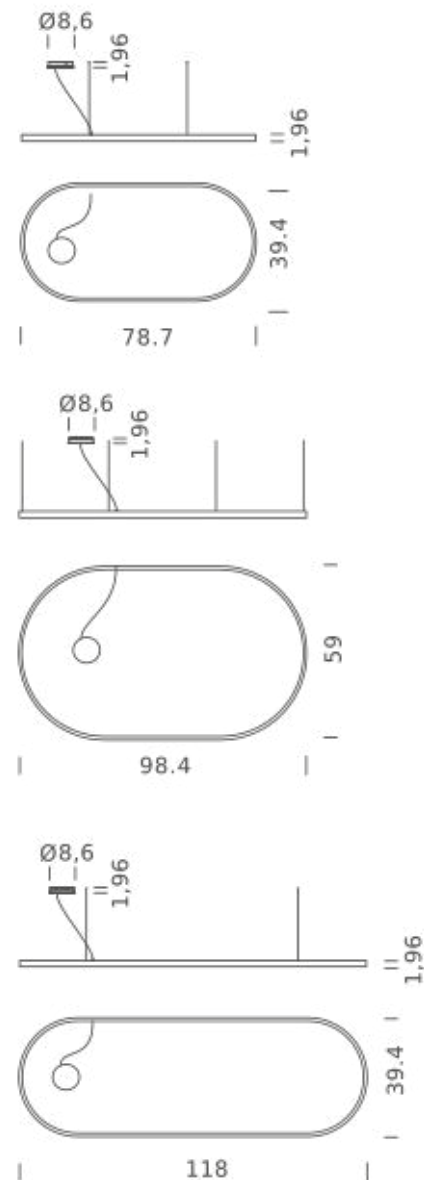

# OVAL 98.4"X59" | DOWNLIGHT - 2700K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 97W  |
| Emission          | Diffused oriented  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 2700K  |
| Luminous flux     | 5589lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 98.4"x59"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped in 4 pieces |


## Codes

UZRO16B25G15DBO  
UZRO16B25G15DNE  
UZRO16B25G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

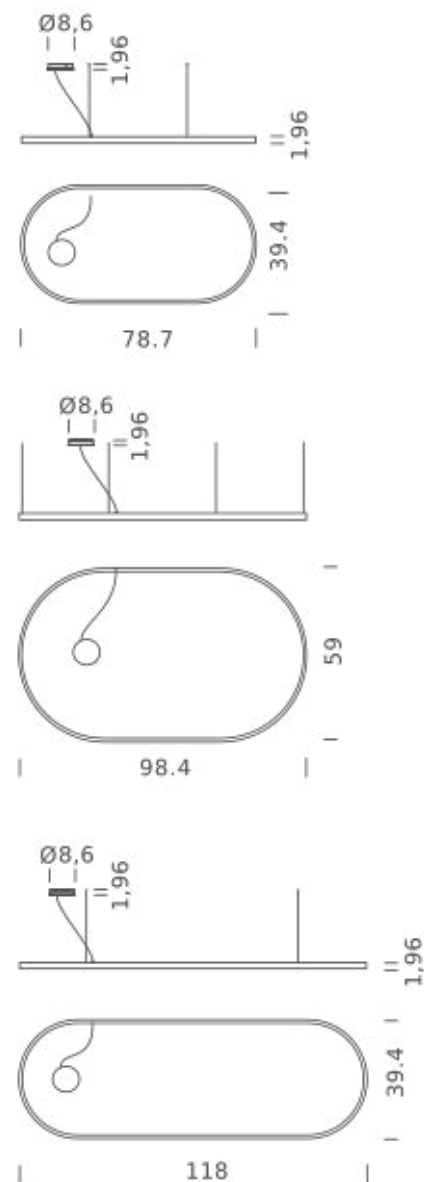

# OVAL 98.4"X59" | DOWNLIGHT - 3000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 97W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 3000K  |
| Luminous flux     | 5918lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 98.4"x59"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped in 4 pieces |


## Codes

UZRO16B25G15WBO  
UZRO16B25G15WNE  
UZRO16B25G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

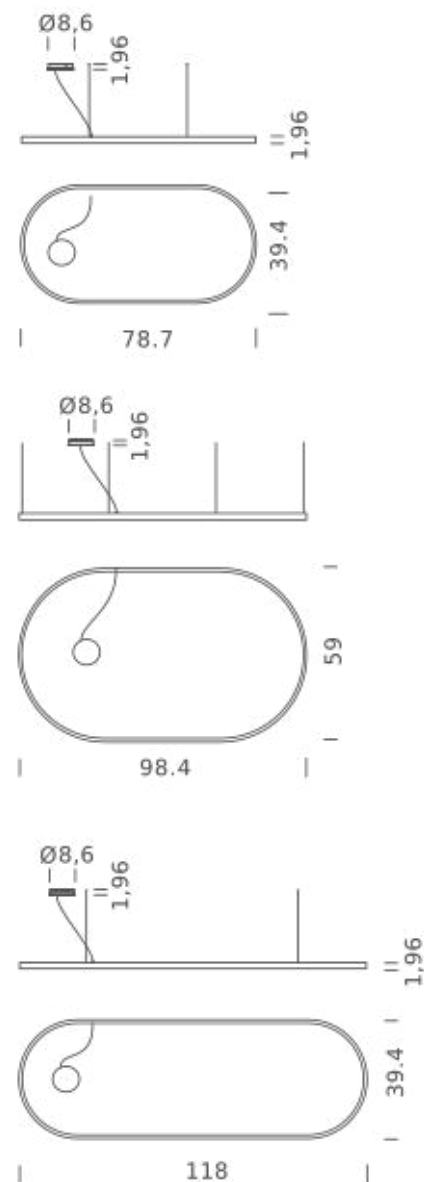

# OVAL 98.4"X59" | DOWNLIGHT - 4000K

## LAMPING

|                   |  |
|-------------------|--|
| Source            | Linear LED   |
| Total power       | 97W  |
| Emission          | Diffused orientable  |
| Switching         | DALI 1-100%  |
| Tension           | 110/240V   |
| Color temperature | 4000K  |
| Luminous flux     | 6576lm   |
| Typ CRI           | 90   |
| IP class          | IP40   |
| Dimensions        | 98.4"x59"x1.9"   |
| Materials         | Aluminum   |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 x electrical cable 16.4'   6 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped in 4 pieces |

## Codes

UZRO16B25G15NBO

UZRO16B25G15NNE

UZRO16B25G15NOR


## Structure

matt white

matt black

matt gold

## Certificazioni

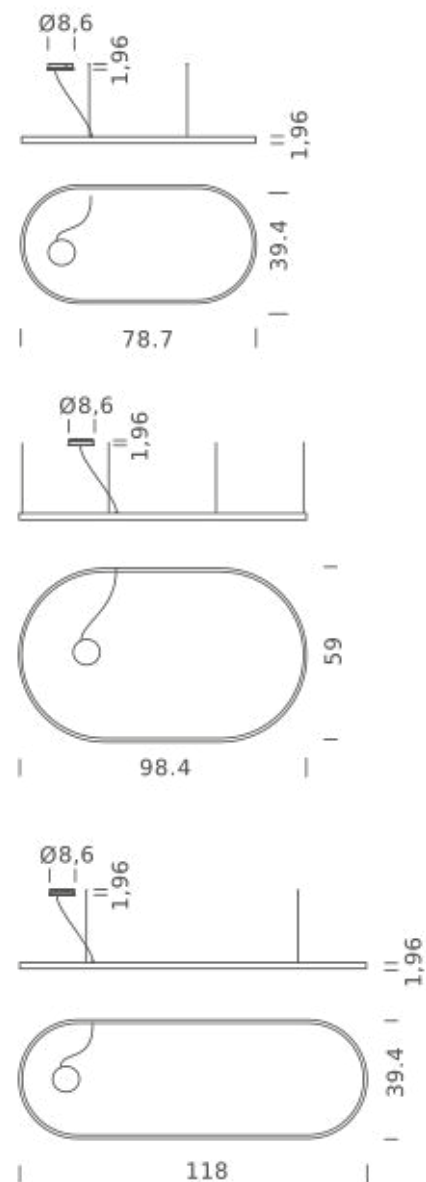

# ZIRKOL – L

ZIRKOL – L is a family of linear suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen to a homogeneous lighting.

Light emission can be direct light and double light emission with high flux and different colour temperatures. Driver and dimmer interface included.



# LINEAR 39.4" | DOWNLIGHT - 2700K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 14.5W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 2700K   |
| Luminous flux     | 833lm   |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 39.4"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1610G15DBO  
UZRL1610G15DNE  
UZRL1610G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

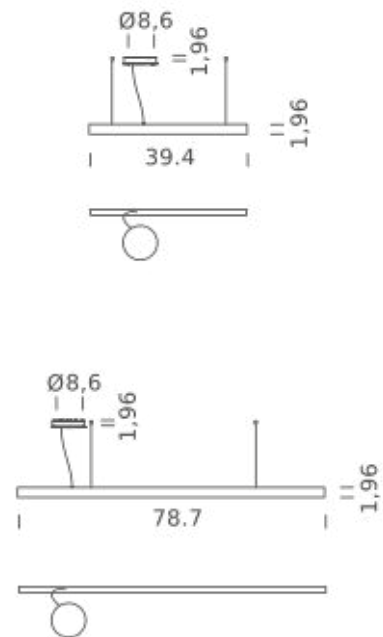



# LINEAR 39.4" | DOWNLIGHT - 3000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 14.5W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 3000K   |
| Luminous flux     | 882lm   |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 39.4"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1610G15WBO  
UZRL1610G15WNE  
UZRL1610G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

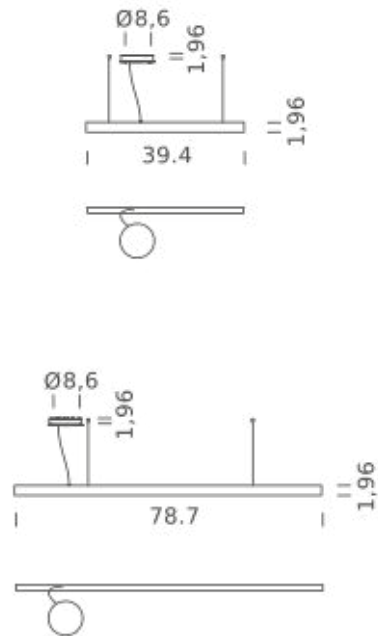

# LINEAR 39.4" | DOWNLIGHT - 4000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 14.5W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 4000K   |
| Luminous flux     | 980lm   |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 39.4"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 x adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |



## Codes

UZRL1610G15NBO  
UZRL1610G15NNE  
UZRL1610G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

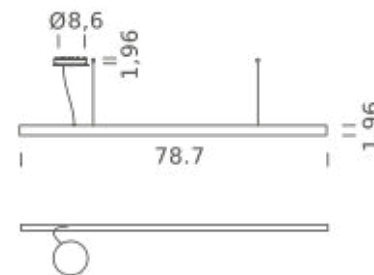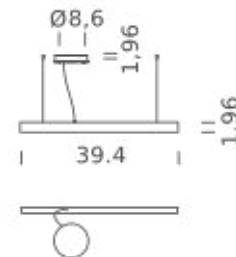

# LINEAR 39.4" | UP-DOWNLIGHT - 2700K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 29W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 2700K   |
| Luminous flux     | 1666lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 39.4"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1710G15DBO  
UZRL1710G15DNE  
UZRL1710G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

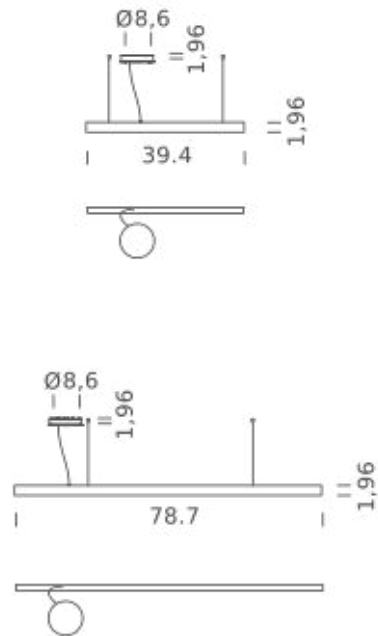

# LINEAR 39.4" | UP-DOWNLIGHT - 3000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 29W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 29W   |
| Color temperature | 3000K   |
| Luminous flux     | 1764lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 39.4"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1710G15WBO  
UZRL1710G15WNE  
UZRL1710G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

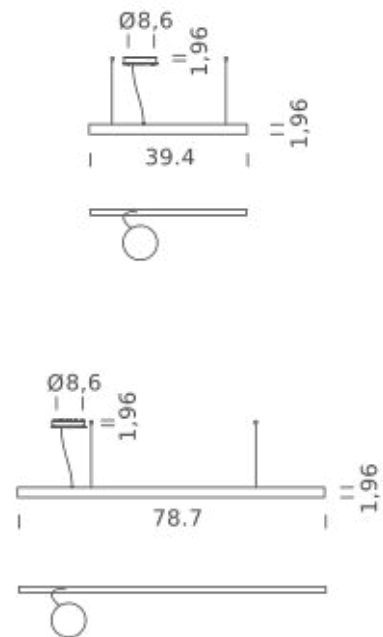

# LINEAR 39.4" | UP-DOWNLIGHT - 4000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 29W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 4000K   |
| Luminous flux     | 1960lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 39.4"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1710G15NBO  
UZRL1710G15NNE  
UZRL1710G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

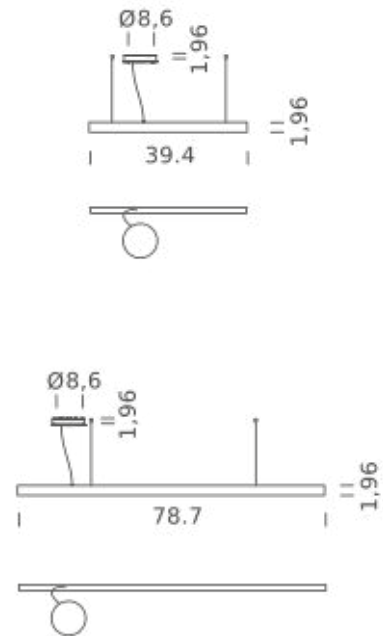

# LINEAR 78.7" | DOWNLIGHT - 2700K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 29W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 2700K   |
| Luminous flux     | 1666lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 78.7"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1620G15DBO  
UZRL1620G15DNE  
UZRL1620G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

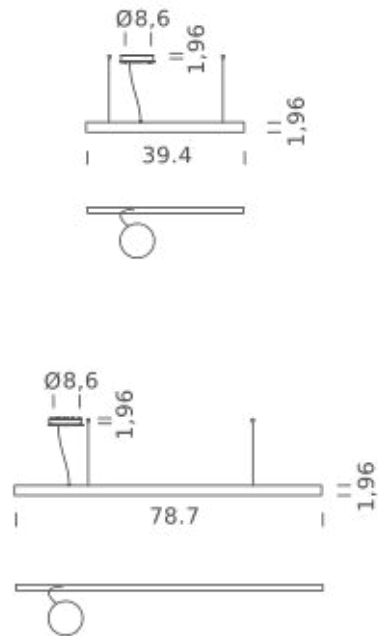

# LINEAR 78.7" | DOWNLIGHT - 3000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 29W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 3000K   |
| Luminous flux     | 1764lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 78.7"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1620G15WBO  
UZRL1620G15WNE  
UZRL1620G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

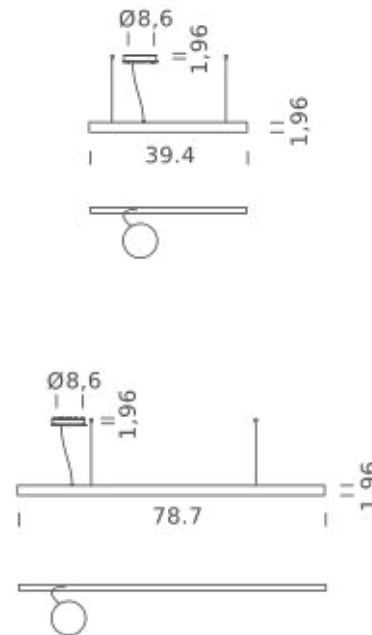

# LINEAR 78.7" | DOWNLIGHT - 4000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 29W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 4000K   |
| Luminous flux     | 1960lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 78.7"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1620G15NBO  
UZRL1620G15NNE  
UZRL1620G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

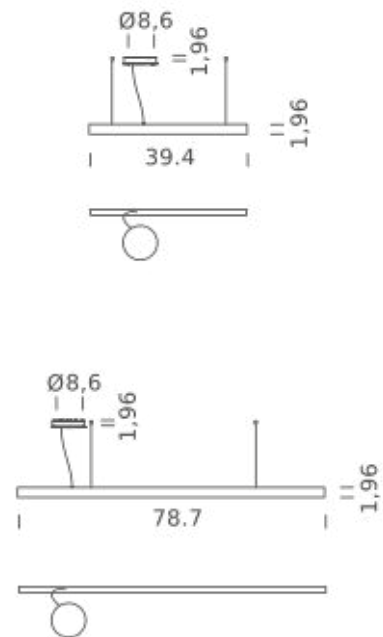



# LINEAR 78.7" | UP-DOWNLIGHT - 2700K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 58W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 2700K   |
| Luminous flux     | 3332lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 78.7"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1720G15DBO  
UZRL1720G15DNE  
UZRL1720G15DOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

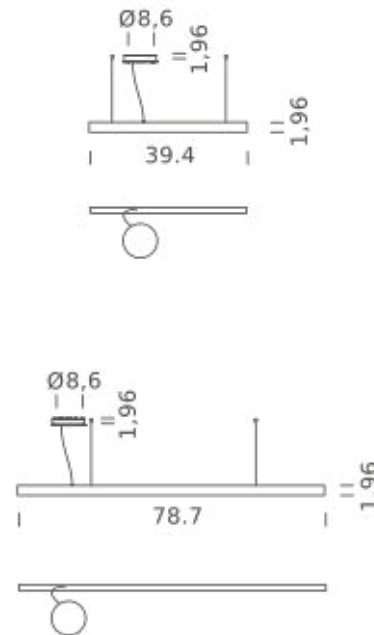

# LINEAR 78.7" | UP-DOWNLIGHT - 3000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 58W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 3000K   |
| Luminous flux     | 3528lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 78.7"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |


## Codes

UZRL1720G15WBO  
UZRL1720G15WNE  
UZRL1720G15WOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

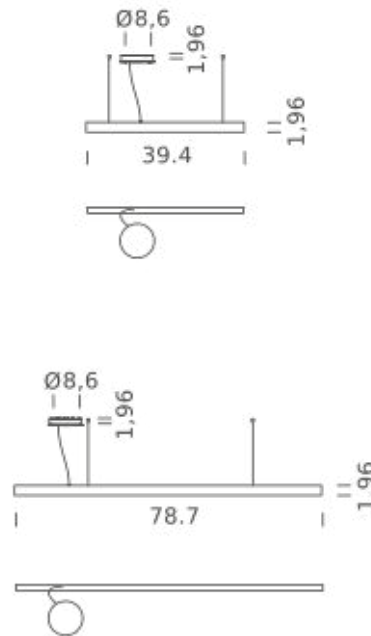

# LINEAR 78.7" | UP-DOWNLIGHT - 4000K

## LAMPING

|                   |   |
|-------------------|---|
| Source            | Linear LED  |
| Total power       | 58W   |
| Emission          | Diffused orientable   |
| Switching         | DALI 1-100%   |
| Tension           | 110/240V  |
| Color temperature | 4000K   |
| Luminous flux     | 3920lm  |
| Typ CRI           | 90  |
| IP class          | IP40  |
| Dimensions        | 78.7"x1.9"  |
| Materials         | Aluminum  |
| Notes             | Round canopy with 1 x driver WALIMLED100/24   1 x dimmer interface WDIMDALIHP   1 electrical cable length 16.4'   2 adjustable metal cable length 9.8' (including ceiling attachments). RAL 9005 black   RAL 9016 white   shipped assembled |

## Codes

UZRL1720G15NBO  
UZRL1720G15NNE  
UZRL1720G15NOR

## Structure

matt white  
matt black  
matt gold

## Certificazioni

