



EN: Upholstered high seat unit in polyurethane injected foam with steel tube frame 25x25mm

IT: Seduta modulare alta imbottita in schiumato poliuretano con struttura in tubo d'acciaio 25x25mm


DE: Gepolsterte Hochsitzeinheit aus Polyurethan-Spritzschaum mit Stahlrohrrahmen 25x25mm

FR: Assise haut modulaire rembourré en mousse de polyuréthane injectée avec une structure en tube d'acier de 25x25mm

ES: Asiento modular alto tapizado de espuma injectada de poliuretano con armazón de tubo de acero de 25x25mm

mm - in

• 220

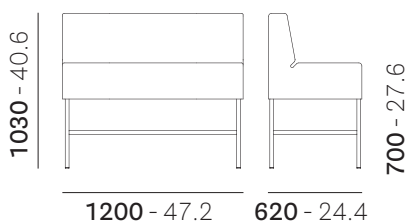

Disassembled
Da assemblare



mc 1
ft³ 35.3



kg 28
lb 61.7

• 221



Disassembled
Da assemblare




mc 0,54
ft³ 19.1



kg 17
lb 37.5

• 222

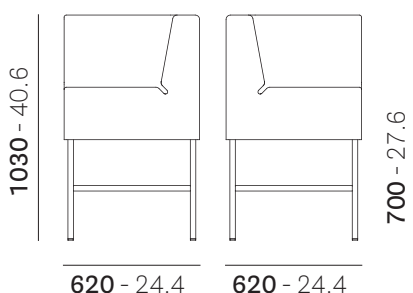

Disassembled
Da assemblare



mc 0,54
ft³ 19.1




kg 19,5
lb 43

220 - 221 - 222 - 223

DESIGN
Pedrali R&D

mm - in

• 223

Disassembled
Da assemblaremc 0,48
ft³ 21.2kg 15
lb 33.1

MATERIALS

Materiali
Materialien
Matériaux
Materiales

• SEAT - SEDUTA - SITZ - ASSISE - ASIENTO

EN: Inner structure in steel with elastic bands, flexible moulded polyurethane (fire-retardant, class 1 IM density 60 kg/m³), covered with fabric**IT: Struttura interna in acciaio, con cinghie elastiche, stampata in poliuretano flessibile (ignifugo, classe 1 IM con densità 60 kg/m³), rivestita in tessuto****DE: Inneres Gestell aus Edelstahl mit elastischen Bändern, Schale aus flexiblem Polyurethan, (schwerentflammbar, Klasse 1 IM mit Dichtigkeit 60 kg/m³), stoffe bezogen****FR: Structure interne en acier, avec courroies élastiques, injectée en polyuréthane flexible, (ignifuge, classe 1 IM densité 60 kg/m³), garnie avec tissu****ES: Estructura interna de acero con cinturón elástico, moldeo de poliuretano flexible (ignífugo, clase 1 IM densidad de 60 kg/m³), forrado de tela**

FABRIC - TESSUTO - STOFF - TISSU - TEJIDO

Cat. A - C (excluding C90÷C95) - D40÷D44 - E - G - H**EN: For more information see finishing legend on the website****IT: Per maggiori informazioni vedere legenda finiture sul sito web**

• FRAME - TELAIO - STRUKTUR - STRUCTURE - ARMAZÓN

EN: Steel, tube 25x25 mm**IT: Acciaio, tubo 25x25 mm****DE: Stahl, Rohr 25x25 mm****FR: Acier, tube 25x25 mm****ES: Acero, tubo 25x25 mm**

FRAME FINISH - FINITURA TELAIO - AUSFÜHRUNG DER STRUKTUR - FINITIONS STRUCTURE - ACABADO ARMAZÓN

EN: Powder coating**IT: Verniciato con polvere****DE: Pulverbeschichtet****FR: Époxy à poudre****ES: Barnizado con polvo****EN: For full range of color available see finishing legend on the website****IT: Per tutta la gamma di colori disponibili vedere legenda finiture sul sito web****EN: Chromed****IT: Cromato****DE: Verchromt****FR: Chromé****ES: Cromado**

• FEET - PIEDINI - GLEITER - PATINS - TACOS

EN: Feet in polyethylene, black**IT: Piedini in polietilene, nero****DE: Gleiter aus Polyethylen, schwarz****FR: Patins en polyéthylène, noir****ES: Tacos de polietileno, negro**

DESIGN
Pedrali R&D

REGULATIONS AND CERTIFICATES Normative e Certificazioni Bestimmungen und Zertifikat Normatives et certifications Normativas y certificados	• ENVIRONMENTAL IMPACT - IMPATTO AMBIENTALE - UMWELTBELASTUNG - IMPACT DUR L'ENVIRONNEMENT - IMPACTO AMBIENTAL					
	MATERIAL Materiale	Kg WEIGHT Peso	% TOTAL ITEM Totale articolo	MATERIAL RECYCLABILITY Riciclabilità del materiale	% MINIMUM RECYCLED AT ORIGIN Minima riciclato all'origine	% RECYCLABLE END OF PRODUCT LIFE Riciclabile fine vita prodotto
	Steel Acciaio	18	66,19	YES	33,2	100
	Polyethylene Polietilene	0,42	1,53	YES	0	100
	Polystyrene Polistirene	0,66	2,41	NO	0	0
	Polyurethane Poliuretano	6,50	23,75	NO	0	0
	Fabric 350 g/m² Tessuto 350 g/m²	1,78	6,52	NO	0	0
	TOTAL TOTALE	27,36 Kg	--	--	21,8 %	67,3 %
	EN: Percentages referred to 220 IT: Percentuali riferite al 220					
	• COMPANY CERTIFICATIONS - CERTIFICAZIONI AZIENDALI - UNTERNEHMENSZERTIFIZIERUNGEN - CERTIFICATIONS D'ENTREPRISE - CERTIFICACIONES DE LA EMPRESA					
	ISO 14001 Environmental management system Sistema di gestione ambientale		ISO 9001 Quality management system Sistema di gestione della qualità			
						