

Flat

Design by Ichiro Iwasaki.

Reference

5965.

Application

Table Lamps

Installation type

Surface Canopy

Description

The Flat table lamp offers multiple functionality; material and light are integrated in a single body. The Flat collection contains various planes of light that rise up to become self-illuminating supports.

Diffuser


Polycarbonate diffuser

Materials


Body: Steel
Head: Aluminium
Reflector: Aluminium

Finish

 **5965-13** White Grey L1 (NCS S 1000-N)

 **5965-47** Green L1 (NCS S 4005-G80Y)

Sketch



Electrical characteristics

1 x LED PLATE 7W 400mA



Total 7.0 W



VIBIA



Light source: 2700K CRI >90 1200 lm 171 lm/W

Driver included: CC - Constant Current 400 mA 100~240V 50/60Hz

Electronic dimming PUSH

Technical characteristics

- 24V transformer at plug

Physical characteristics

1 Box / 0.25 x 0.37 x 0.43 m. / Vol. 0.0383 m³ /
Gross weight 3.2 kg. / Net weight 1.1 kg.

Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 73.02 lm/W

Coordinate system : CG

Total flux : 644.30 lm

Maximum value : 259.03 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : floor

Light position :

X=0.00m Y=0.00m Z=2.50m

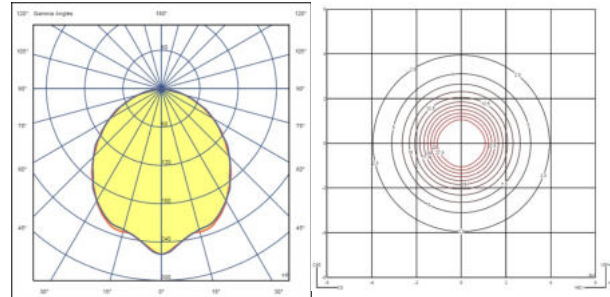

Certificates



