

Pin

Design by Ichiro Iwasaki.

Reference

1660.

Application

Floor Lamps

Installation type

Surface Canopy

Description

Floor lamp. Design by Ichiro Iwasaki. This reading lamp is characterized by having a diffuser with an adjustable head. Available in white, black, cream and green matt finishes.

Diffuser

Polycarbonate diffuser

Materials

Head: Aluminium


Base: Zamak

Diffuser: Polycarbonate

Rods: Steel

Finish


 **1660-04** Black (NCS 9000N)

 **1660-58** Cream (NCS S 2005-Y20R)

 **1660-62** Green (NCS S 3010-G20Y)

 **1660-93** White (NCS S 0502-Y)

Sketch



Electrical characteristics

1 x LED 4,48W 350mA

Total 4.5 W



VIBIA



Light source: 2700K CRI >90 452 lm 100 lm/W

Fixture: 192 lm 42 lm/W

Driver included: CC - Constant Current 350 mA 100~240V 50/60Hz

Electronic dimming ON/OFF

Technical characteristics

- Switch on the cable

Physical characteristics

1 Box / 1.50 x 0.27 x 0.33 m. / Vol. 0.1308 m³ /

Gross weight 7.5 kg. / Net weight 3.8 kg.

Installation and assembly

Please, see the installation manual

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 31.88 lm/W

Coordinate system : CG

Total flux : 192.18 lm

Maximum value : 80.54 cd

Light position : C=75.00 G=4.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

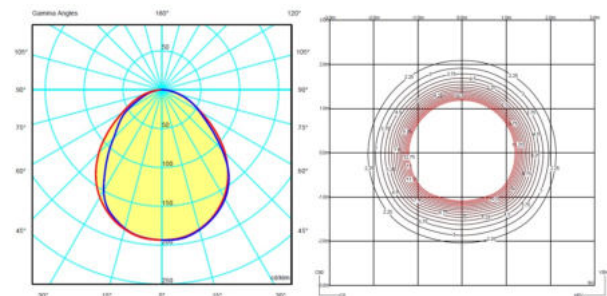

Certificates

