

Pin

Design by Ichiro Iwasaki.

Reference

1675.

Application

Wall Lamps

Installation type

Surface Canopy

Description

Wall lamp. Design by Ichiro Iwasaki. Wall light for reading, ideal for bedrooms. The diffuser can turn and rotate to bring the light to where it is needed. Available in white, black, cream and green matt finishes.

Diffuser

Polycarbonate diffuser

Materials

Head: Aluminium

Base: Zamak

Diffuser: Polycarbonate

Rods: Steel

Finish



1675-04 Black (NCS 9000N)



1675-58 Cream (NCS S 2005-Y20R)




1675-62 Green (NCS S 3010-G20Y)



1675-93 White (NCS S 0502-Y)

Sketch



Electrical characteristics


1 x LED 4,48W 350mA

Total 4.5 W



A+

VIBIA



Light source: 2700K CRI >90 452 lm 100 lm/W

Fixture: 192 lm 42 lm/W

Driver included: CC - Constant Current 350 mA 100~240V 50/60Hz

Electronic dimming ON/OFF

Technical characteristics

- Switch on the wall plate

Physical characteristics

1 Box / 0.02 x 0.02 x 0.01 m. / Vol. 0.0000 m³ /
Gross weight 0.9 kg. / Net weight 0.4 kg.

Installation and assembly

Please, see the installation manual

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 31.88 lm/W

Coordinate system : CG

Total flux : 192.18 lm

Maximum value : 80.54 cd

Light position : C=75.00 G=4.00


Symmetry on the planes : Symmetrical planes

270-90

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

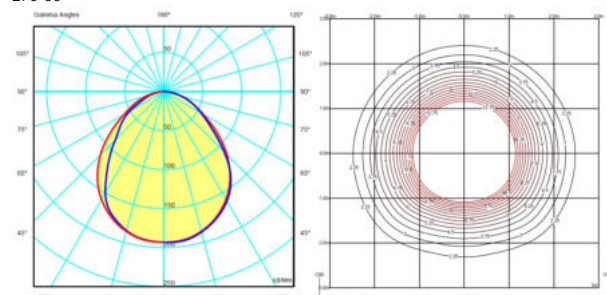

Certificates

