

Quadra Ice

Design by Prolif Diffusion Studio.

Reference

1128.

Application

Ceiling Lamps

Installation type

Surface Canopy

Description

Light for ceiling or wall fitting, in optical glass to fit perfectly into the setting as it has no profile.

Diffuser

Optical-glass diffuser

Materials

Diffuser: Glass


Ceiling support: Steel

Finish



1128-00 White glass (RAL 9016)

Sketch




Electrical characteristics

1 x R7s 80mm 230V 120W Eco

Total 120.0 W

VIBIA



Fixture: 1711 lm 14 lm/W

Driver included: 230V 50Hz

Physical characteristics

1 Box / 0.20 x 0.41 x 0.41 m. / Vol. 0.0336 m³ /

Gross weight 2.3 kg. / Net weight 2.1 kg.


Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 74.37%

Coordinate system : CG

Total flux : 2300.00 lm

Maximum value : 172.19 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

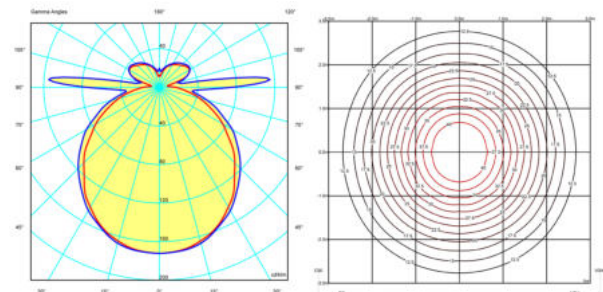

Certificates

