


MIRAGE

Design Giovanni Barbato

MIRAGE SP



The blown glass gives light its central role, directing and spreading it in the environment and emphasizing its brightness. LED lighting source.

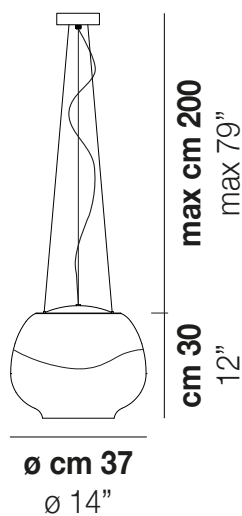

MIRAGE SP

TECHNICAL DATA:



LED 2700K DIM2	1x19,5	39 V
LED 2700K DIM3	1x19,5	39 V
LED 3000K DIM2	1x19,5	39 V
LED 3000K DIM3	1x19,5	39 V

CERTIFICATIONS:



Led 2700 K 19,5 W 39 V 2850 lm DIM2 Phase Cut

Led 2700 K 19,5 W 39 V 2850 lm DIM3 0-10V, Push

Led 3000 K 19,5W 39 V 2850 lm DIM2 Phase Cut

Led 3000 K 19,5W 39 V 2850 lm DIM3 0-10V, Push

VOLUME	Mc 0,13
GROSS WEIGHT	Kg 9
NET WEIGHT	Kg 5,5

download



SHADE FINISHING



BCAM



BCCR



BCFU

FRAME FINISHING



BC


MIRAGE

Design Giovanni Barbato

MIRAGE SP



The blown glass gives light its central role, directing and spreading it in the environment and emphasizing its brightness. LED lighting source.

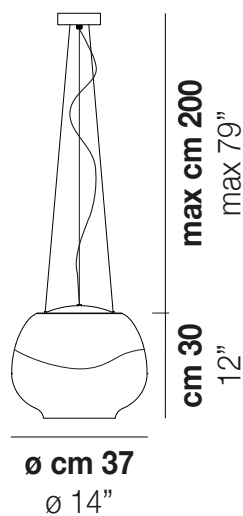

MIRAGE SP

TECHNICAL DATA:



LED 2700K DIM2	1x19,5	39 V
LED 2700K DIM3	1x19,5	39 V
LED 3000K DIM2	1x19,5	39 V
LED 3000K DIM3	1x19,5	39 V

CERTIFICATIONS:



Led 2700 K 19,5 W 39 V 2850 lm DIM2 Phase Cut
 Led 2700 K 19,5 W 39 V 2850 lm DIM3 0-10V, Push
 Led 3000 K 19,5W 39 V 2850 lm DIM2 Phase Cut
 Led 3000 K 19,5W 39 V 2850 lm DIM3 0-10V, Push

VOLUME Mc 0
 GROSS WEIGHT Kg 9
 NET WEIGHT Kg 5,5

download



SHADE FINISHING



BCAM



BCCR



BCFU

FRAME FINISHING



BC


MIRAGE

Design Giovanni Barbato

MIRAGE SP



The blown glass gives light its central role, directing and spreading it in the environment and emphasizing its brightness. LED lighting source.

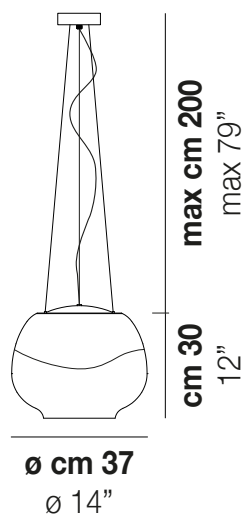

MIRAGE SP

TECHNICAL DATA:



LED 2700K DIM2	1x19,5	39 V
LED 2700K DIM3	1x19,5	39 V
LED 3000K DIM2	1x19,5	39 V
LED 3000K DIM3	1x19,5	39 V

CERTIFICATIONS:



Led 2700 K 19,5 W 39 V 2850 lm DIM2 Phase Cut
 Led 2700 K 19,5 W 39 V 2850 lm DIM3 0-10V, Push
 Led 3000 K 19,5W 39 V 2850 lm DIM2 Phase Cut
 Led 3000 K 19,5W 39 V 2850 lm DIM3 0-10V, Push

VOLUME	Mc 0,13
GROSS WEIGHT	Kg 9
NET WEIGHT	Kg 5,5

download



SHADE FINISHING



BCAM



BCCR



BCFU

FRAME FINISHING



BC


MIRAGE

Design Giovanni Barbato

MIRAGE SP



The blown glass gives light its central role, directing and spreading it in the environment and emphasizing its brightness. LED lighting source.

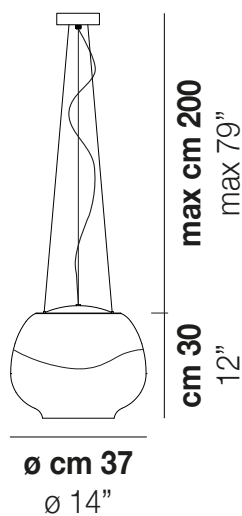

MIRAGE SP

TECHNICAL DATA:



LED 2700K DIM2	1x19,5	39 V
LED 2700K DIM3	1x19,5	39 V
LED 3000K DIM2	1x19,5	39 V
LED 3000K DIM3	1x19,5	39 V

CERTIFICATIONS:



Led 2700 K 19,5 W 39 V 2850 lm DIM2 Phase Cut

Led 2700 K 19,5 W 39 V 2850 lm DIM3 0-10V, Push

Led 3000 K 19,5W 39 V 2850 lm DIM2 Phase Cut

Led 3000 K 19,5W 39 V 2850 lm DIM3 0-10V, Push

VOLUME	Mc 0,13
GROSS WEIGHT	Kg 9
NET WEIGHT	Kg 5,5

download



SHADE FINISHING



BCAM



BCCR



BCFU

FRAME FINISHING



BC


MIRAGE

Design Giovanni Barbato

MIRAGE SP 07



The blown glass gives light its central role, directing and spreading it in the environment and emphasizing its brightness. LED lighting source.

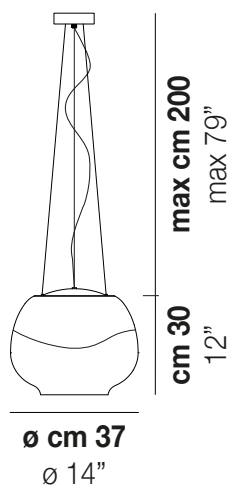

MIRAGE SP 07

TECHNICAL DATA:



1x19,5 39 V

CERTIFICATIONS:



VOLUME	Mc 0,13
GROSS WEIGHT	Kg 9
NET WEIGHT	Kg 5,5

download




SHADE FINISHING



BCAM



BCCR



BCFU

FRAME FINISHING



BC