

Ghost

Design by Arik Levy.

Reference

4987.

Application

Hanging lamps

Installation type

Surface canopy

Description

Both dramatic and delicate, the Ghost pendant hangs low from nearly invisible cables to form a floating focal point. Crafted of mouthblown opal triplex glass, its smooth surface radiates a warm, luminous glow.

Diffuser

Mat opal triplex blown-glass diffuser

Materials


Ceiling rose: Steel

Finish



4987-11 Black (NCS S 8500N)

Sketch



Electrical characteristics

1 x LED 37,2W 1050mA

Total 37.2 W



VIBIA



Light source: 2700K CRI >90 5547 lm 149.11 lm/W

Driver included: CC - Constant Current 1050 mA 110~240V 50/60Hz

Electronic dimming: DALI 1-10V PUSH

Optional dimming: Casambi

Physical characteristics

1 Box / 0.79 x 0.61 x 0.61 m. / Vol. 0.2939 m³ /

Gross weight 20.6 kg. / Net weight 10.0 kg.

Installation and assembly

Please, see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 85.34 lm/W

Coordinate system : CG

Total flux : 3604.01 lm

Maximum value : 336.62 cd


Light position : C=0.00 G=62.50

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

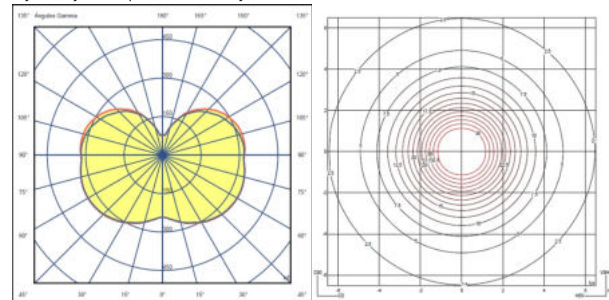

Certificates

