
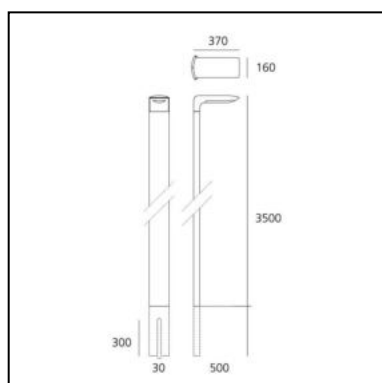


Hila Pole 350 3000K Gray/white

Carlo Colombo



LUMINAIRE

- Watt: **24W**
- Voltage: **220V-240V**
- Delivered lumens output: **1403lm**
- CCT: **3000K**
- Efficiency: **100%**
- Efficacy: **58.46lm/W**
- CRI: **80**

Notes

Underground pole included.
Effective power 24W.

DESCRIPTION

Composed by lamp and ground support pole.
Lamp unit is die-cast EN-AB 47100 aluminium.
UV resistant diffuser in shock resistant polycarbonate with satiny finish.
Support pole h=350cm above ground +50cm underground in extruded EN-AW 6060 aluminium, chromate treated and painted.

PRODUCT CODE: SCENARIOS

FEATURES

- Article Code: **T085910**
- Colour: **Gray/white**
- Installation: **Pole**
- Material: **Aluminum, polycarbonate**
- Series: **Scenarios**
- Environment: **Outdoor**
- Emission: **Direct**
- design by: **Carlo Colombo**

DIMENSIONS

- Length: **cm 37**
- Width: **cm 16**
- Height: **cm 350**
- Depth: **cm 30**
- Impact Resistance: **IK10**
- Glow Wire Test: **650°**




SOURCES INCLUDED


- Category: **Led**
- Number: **1**
- Watt: **24W**
- Color temperature (K): **3000K**
- CRI: **80**

Hila Floor 90 Anthracite gray

Carlo Colombo



IP65   

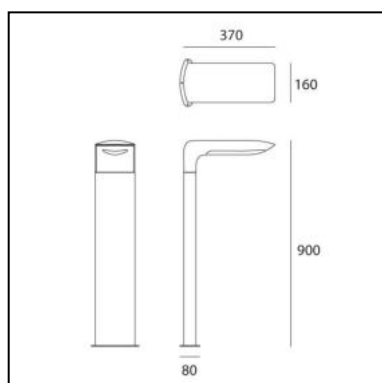

LUMINAIRE

- Watt: **12W**
- Voltage: **220V-240V**
- Delivered lumens output: **841lm**
- CCT: **3000K**
- Efficiency: **100%**
- Efficacy: **70.11lm/W**
- CRI: **80**

Notes

Effective power 13W.

DESCRIPTION

Composed by lamp, support pole and ground mounting plate. Lamp unit in die-cast EN-AB 47100 aluminium. UV resistant diffuser in shock resistant polycarbonate with satiny finish. Support pole h=90cm in extruded EN-AW-6060 aluminium, chromate treated and painted. Mounting plate in painted steel.

PRODUCT CODE: SCENARIOS

FEATURES

- Article Code: **T085730**
- Colour: **Anthracite gray**
- Installation: **Floor**
- Material: **Aluminum, polycarbonate**
- Series: **Scenarios**
- Environment: **Outdoor**
- Emission: **Direct**
- design by: **Carlo Colombo**

DIMENSIONS

- Length: **cm 37**
- Width: **cm 16**
- Height: **cm 90**
- Impact Resistance: **IK10**
- Glow Wire Test: **650°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **12W**
- Color temperature (K): **3000K**
- CRI: **80**